

**17704 - GE garage & basement 19 watt T8 1-pack**

**F28T8/CW/4 6PK**

- ☞ 1.0 inch diameter T8 with medium bi-pin (g13) base
- ☞ 28 inches long
- ☞ 4100K cool white light appearance
- ☞ Cool white light perfect for sizable spaces
- ☞ For use in large spaces such as basements and garages
- ☞ GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- ☞ Lasts 3.4 years based on 6 hours per day usage

**PRODUCT PHOTO**



**GENERAL CHARACTERISTICS**

Base Description	Medium Bi-Pin (G13)
Base Type	Pin/Plug-In
Mercury Content	18 mg
Mercury-Picogram per mean lm hr	2096.1
Rated Life Instant Start-Hrs	7500 h @ 3 h
Starting Temp (MIN) C-degrees	10 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	7500 h
Primary Application	Appliance Speciality
Product Technology	Linear Fluorescent
Base	G13
Bulb Shape	T8

**PHOTOMETRIC CHARACTERISTICS**

Mean Lumens nominal	1145 lm
Nominal Initial Lumen per Watt	71.0526315789
Initial Lumens-nominal	1350 lm
Color Rendering Index-CRI	60
Color Temperature	4100 K

**PRODUCT INFORMATION**

Product Code	17704
Description	F28T8/CW/4 6PK
Alternative Unit Of Measure	EACH
Standard Package Quantity	1
Ean UPC	043168980777
Standard Package GTIN	00043168980777
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	1
Sales Unit	Each
UCC	043168177047
Alternative Unit Of Measure	CASE
Standard Package Quantity	6
Ean UPC	043168980777
Standard Package GTIN	00043168177047
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
Sales Unit	Case
UCC	043168177047

**DIMENSIONS**

Bulb Diameter (DIA) <Max>	1.1 in
Bulb Diameter (DIA) <Min>	0.94 in
Diameter	1.0 in
End of Base Pin to Pin	27.67 in
Face to End of Opposing Pin (B) <Max>	27.5 in
Face to End of Opposing Pin (B) <Min>	27.4 in
Nominal Length	28.0 in

**ELECTRICAL CHARACTERISTICS**

Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	108.00 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	19 W

**CAUTIONS & WARNINGS**


**Caution**

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

Warning

Risk of Electric Shock

Turn power off before inspection  
installation or removal.

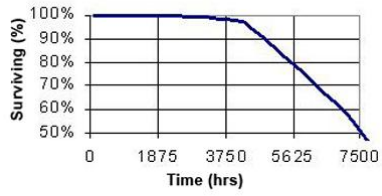

Lamp Contains Mercury

Manage in Accord with Disposal Laws

See : [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-327-0097