

# Features & Specifications



## ALPINE LED AREA LIGHTS

**INTENDED USE** – LED area lights are all-purpose site lighting fixtures that can be used for parking lots, car dealerships, outdoor stadiums, pathways, and parks. These LED fixtures will yield a significant reduction in energy consumption compared to standard HID systems and virtually eliminate ongoing maintenance expenses with a long-lasting lifespan. Designed for outdoor applications, the LED area light fixtures will provide reduced offsite visibility as well as effective security lighting.

**CONSTRUCTION** – Heavy-duty die cast aluminum housing with bronze polyester powder paint for corrosion-free durability. Resistant to rough vibrations and external impacts. Acrylic lens protects the LEDs and provides even light distribution. Housing is sealed with a silicone gasket, protecting against moisture and environmental contaminants (IP65 rated). Modular LED bricks wired in parallel for ease of maintenance. Water-tight photocell receptacle protects fixture from moisture damage until a photocell is added.

**OPTICS** – High-performance LEDs maintain a 21,581 Lumen output at 5000K for 50,000 hours of use. ≥70 CRI.

Type V produces a circular distribution that has the same intensity at all angles. This distribution has a circular symmetry of candlepower that is essentially the same at all lateral angles. It is intended for luminaire mounting at or near center of roadways, center islands of parkway, and intersections. It is also meant for large, commercial parking lot lighting as well as areas where sufficient, evenly distributed light is necessary.

LED area lights are designed to have a more directional beam angle than metal halide and high pressure sodium fixtures so no light is lost within or above the fixture. These LED fixtures also do not lose Lumens in the same way as a HID fixture, meaning the brightness stays consistent longer and needs to be replaced far less frequently.

**ELECTRICAL** – Input voltage of 277-480 VAC, 50/60Hz. Shorting cap is included. Integrated 10kV surge protection. Consider adding a surge protector to protect your fixtures from power surges in your electrical system as an added insurance policy to your investment.

**INSTALLATION** – Versatile mount design can be used with different styles of mounts, including straight arm, slipfitter, trunnion, and u brackets. Mounts sold separately.

**LISTINGS** – UL Certified to safety standards for wet location. Rated for -40°C to 50°C ambient temperature. IP-65 Rated.

**WARRANTY** – 3-year warranty. PLT products that are damaged or defective will be repaired or replaced at PLT's choosing for a period of 3 years. Contact 1-800-624-4488 for more information.

**ADD-ONS** – Pair with timers, photocells, and motion sensors for hassle free bright night time lighting and energy savings during the day. If pairing with a photocell, it must be LED compatible in order to operate properly. If using a conventional photocell, be sure to replace it with one rated for use with LEDs. While conventional light sensors will still work with LED fixtures at first, they will burn out prematurely. The same is true for motion sensors.

If you live in the northern hemisphere, your photocells should face north whenever possible. North-facing light sensors allow for the most balanced on/off schedule based on the arc of the sun. If pointed west, it will turn on and off late and vice versa for east-facing light sensors. Photocells facing the south will be exposed to the most direct sunlight which can burn out the components and cause premature failure. If you want your lights to come on early or late, we recommend pointing the light sensor northeast or northwest, respectfully. The opposite is true south of the equator.




LEDs Cooling Vents

Shorting Cap Included




Photocell Receptacle & Shorting Cap (Photocell Sold Separately)

Dimensional Images:




Dimensions

Length: 14.38 in.  
Width: 13.63 in.  
Height: 2.6 in.



SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-11411A	5000K	21,581	70	153	277-480V	NO	Ú   √ Á   Á æ	50,000	3 Years

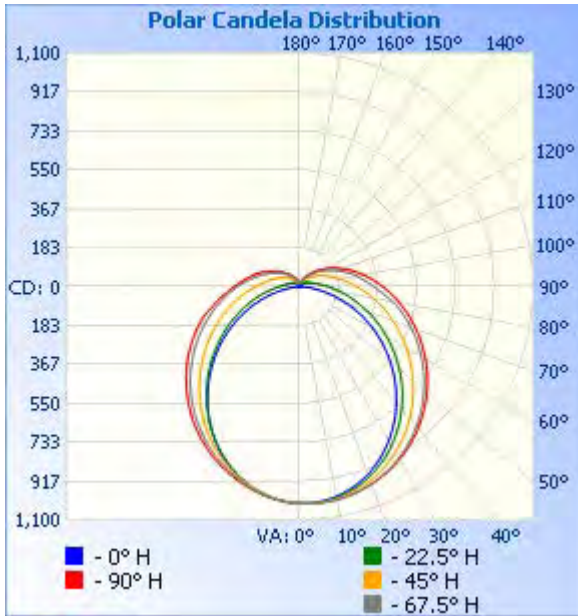

### Illuminance at a Distance

Center Beam fc	Beam Width	
3.33M	8.53 fc	8.77 M 21.82 M
6.67M	2.14 fc	17.54 M 43.62 M
10.00M	0.95 fc	26.31 M 65.43 M
13.33M	0.53 fc	35.08 M 87.23 M
16.67M	0.34 fc	43.85 M 109.05 M
20.00M	0.24 fc	52.62 M 130.87 M

■ Vert. Spread: 105.5°  
■ Horiz. Spread: 146.0°

