

FEATURES & SPECIFICATIONS

INTENDED USE — The BLT Best-in-Value Low Profile LED luminaire features a popular center basket design that offers a clean, versatile style and volumetric distribution. High efficacy LED light engines deliver energy savings and low maintenance compared to traditional sources. An extensive selection of configurations and options make the BLT the perfect choice for many lighting applications including schools, offices and other commercial spaces, retail, hospitals and healthcare facilities. The low profile BLT design (2-3/8") also makes it an excellent choice for renovation projects.

CONSTRUCTION — BLT enclosure components are die-formed for dimensional consistency and painted after fabrication with a polyester powder paint for improved performance and protection.

The reflector is finished with a high reflective matte white powder paint for improved aesthetics and increased light diffusion.

End plates contain easy-to-position integral T-bar clips for securely attaching the luminaire to the T-grid. For additional T-grid security, optional screw on T-bar clips are available.

Diffusers are extruded from impact modified acrylic for increased durability.

LED boards and drivers are accessible from the plenum.

OPTICS — Volumetric illumination is achieved by creating an optimal mix of light to walls, partitions and vertical and horizontal work surfaces – rendering the interior space, objects and occupants in a more balanced, complimentary luminous environment. High performance extruded acrylic diffusers conceal LEDs and efficiently deliver light in a volumetric distribution. Four diffuser choices available – curved and square designs with linear prisms or a smooth frosted finish.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 80% LED lumen maintenance at 60,000 hours (L80/60,000).

Non-Configurable BLT: Generic 0-10 volt dimming driver. Dims to 10%

Configurable BLT: available in High Efficiency (HE) versions for applications where a lower wattage (over the standard product) is required. The High Efficiency versions deliver >130 LPW and can be specified via the Lumen Package designations in the Ordering Information below.

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Optional integrated nLight® controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Connection to nLight is simple. It can be accomplished with integrated nLight AIR wireless or through standard Cat-5 cabling. nLight offers unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission, while nLight AIR is commissioned easily through an intuitive mobile app.

Lumen Management: Unique lumen management system (option N80) provides on board intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

Driver disconnect provided where required to comply with US and Canadian codes.

SENSOR — Integrated sensor (individual control): Sensor Switch MSD7ADCX ((Passive infrared (PIR) or MSDPDT7ADCX ((PIR/Microphonics Dual Tech (PDT)) integrated occupancy sensor/automatic dimming photocell allows the luminaire to power off when the space is unoccupied or enough ambient light is entering the space. See page 4 for more details on the integrated sensor.

Integrated Sensor (nLight Wired Networking): This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software. See page 4 for the nLight sensor options.

Integrated Smart Sensor (nLight Air Wireless Platform): The rES7 sensor is nLight AIR enabled, meaning it has the ability to communicate over the wireless nLight control platform. It is both a digital PIR occupancy sensor/automatic dimming photocell. It pairs to other luminaires and wall switches through our mobile app, CLAIRITY, which allows for simple sensor adjustment. See page 4 for more details on the Integrated Smart Sensor.

INSTALLATION — The BLT's low profile design of only 2-3/8" provides increased installation flexibility especially in restrictive plenum applications. The BLT fits into standard 15/16" and narrow 9/16" T-grid ceiling systems.

Suitable for damp location.

For recessed mounting in hard ceiling applications, Drywall Grid Adapters (DGA) are available as an accessory. See Accessories section.

LISTINGS — CSA Certified to meet U.S. and Canadian standards. IC rated. DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified.

WARRANTY — 5-year limited warranty.

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

BLT Series LED

2BLT

2' x 4'
LED



eldoLED




Specifications

Length: 47-3/4 (121.2)

Width: 23-3/4 (60.3)


Depth: 2-3/8 (6.0)

Depth with Air supply/return: 2-3/4 (6.9)

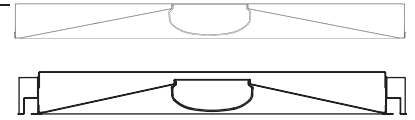

All dimensions are inches (centimeters) unless otherwise specified.

Multiple Diffuser Options

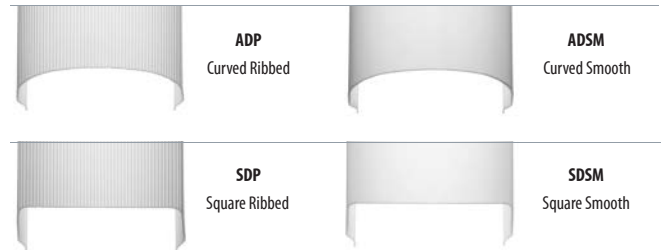


A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background***
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background***

2BLT Volumetric Recessed Lighting 2'x4'

 A+ Capable options indicated by this color background.

ORDERING INFORMATION Lead times will vary depending on options selected. Consult with your sales representative.

Example: 2BLT4 40L ADP EZ1 LP840

| 2BLT4 | | Lumens ² | | Diffuser | | Voltage | | Driver | | Color temperature | |
|---------------|--|--|--|--|----------------------|-----------------------|--|---------------------|--|-------------------|--|
| Series | Air function | | | | | | | | | | |
| 2BLT4 2x4 BLT | (blank) Static A Air supply/return ¹ | Standard efficiency (>100 LPW) | High efficiency^{3,4} (>130 LPW) | ADP Curved, linear prisms | ADSM Curved, smooth | (blank) MVOLT | EZ1 eldoLED dims to 1% (0-10 volt dimming) | LP830 82CRI, 3000 K | | | |
| | | 30L 3000 | 40LHE 4000 | SDP Square, linear prisms | SDSM Square, smooth | 120 120V | | LP835 82CRI, 3500 K | | | |
| | | 40L 4000 | 48LHE 4800 | ADPT Curved, linear prisms | ADSMT Curved, smooth | 277 277V | | LP840 82CRI, 4000 K | | | |
| | | 48L 4800 | 60LHE 6000 | SDPT Square, linear prisms | SDSMT Square, smooth | 347 347V ⁵ | | LP850 82CRI, 5000 K | | | |
| | | 60L 6000 | 72LHE 7200 | Includes trim rings to match sensored version | | | | LP930 90CRI, 3000K | | | |
| | | 72L 7200 | 85LHE 8500 | | | | | LP935 90CRI, 3500K | | | |
| | | | | | | | | LP940 90CRI, 4000K | | | |
| | | | | | | | | LP950 90CRI, 5000K | | | |

| Controls | | Occupancy control ¹⁰ | | Options | |
|--|--|-----------------------------------|--|---------------|---|
| (blank) No nLight [®] | (blank) No sensor control | Individual Control | | EL7L | 700 lumen battery pack ¹³ |
| N80 nLight [®] with 80% lumen management | nLight Wired Networking | MSD7ADCX | PIR integral occupancy sensor with automatic dimming control photocell ^{6,12} | EL14L | 1400 lumen battery pack ¹³ |
| N80EMG nLight [®] with 80% lumen management For use with generator supply EM power ⁵ | NES7 nLight™ nES 7 PIR integral occupancy sensor ¹¹ | MSDPDT7ADCX | PDT integral occupancy sensor with automatic dimming control photocell ^{6,12} | EL14LSD | 1400 lumen battery pack with self-diagnostic testing feature ^{13,14} |
| N100 nLight [®] without lumen management | NESPDT7 nLight™ nES PDT 7 dual technology integral occupancy control ¹¹ | nLight Wireless Zone | | CP | Chicago plenum ¹⁵ |
| N100EMG nLight [®] without lumen management For use with generator supply EM power ⁵ | NES7ADCX nLight™ nES 7 ADCX PIR integral occupancy sensor with automatic dimming photocell ¹¹ | RES7Z | nLight Air PIR integral occupancy sensor with automatic dimming photocell for zone control | BGTD | Bodine Generator Transfer Device ¹⁶ |
| NLTAIR nLight AIR enabled ⁹ | NESPDT7ADCX nLight™ nES PDT 7 dual technology integral occupancy sensor with automatic dimming photocell ¹¹ | nLight Wireless Networking | | PWS1836 | 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit |
| | RES7N nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities | | | PWS1846 | 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuit |
| | | | | PWS1846 PWSLV | Two cables: one 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge, purple and gray ¹⁷ |
| | | | | PWS1856LV | 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage purple and grey wires ¹⁷ |
| | | | | GLR | Fast-blowing fuse ¹⁸ |
| | | | | GMF | Slow-blowing fuse ¹⁸ |
| | | | | NPLT | Narrow pallet |
| | | | | RRL_ | RELOC [®] -ready luminaire ¹⁹ |
| | | | | LATC | Earthquake clip |
| | | | | DWAM | Anti-Microbial paint |
| | | | | JP16 | Job packaging |
| | | | | IP5X | Gasketed diffuser compartment to meet IP5X rating ²⁰ |

Accessories next page

Notes

- Air supply/return option only available with ADPT, ADSMT, SDPT, and SDSMT diffuser options.
- Approximate lumen output.
- All versions may not achieve 130+ LPW.
- Air supply/return option, 90 CRI, and versions with integral sensor trim rings may not achieve 130 LPW.
- Not available with SLD EL7L, or EL14L options.
- Not available with N80, N80EMG, N100, N100EMG, NLTAIR, or occupancy control.

- Not available with controls, occupancy controls, or PWS options. Consult factory for Hi-Lume dimming.
- nLight EMG option requires a connection to existing nLight network. Power is provided from a separate N80 or N100 enabled fixture.
- Must order with RES7N or RES7Z sensor. Only available with EZ1 driver. Not available with 72L, 72LHE, or 85LHE options.
- Must specify diffuser with trim rings. See sensor options on page 4.
- Requires N80, N80EMG, N100, or N100EMG.
- Only available with EZ1 driver option. 0-10v dimming wires not accessible via access plate.
- When using pre-wire option, use PWS1846 or PWS1846 PWSLV.

- Not available with N80, N80EMG, N100, or N100EMG.
- Must specify voltage. Requires BSE labeling, voltage specific. Consult factory for options.
- Not available with nLight wired/wireless network or individual controls.
- Must specify voltage, 120 or 277, with GLR and GMF fusing.
- Not available with air supply/return or Wired Networking (NES_) and Individual Control (MSD_) sensors.

2BLT Volumetric Recessed Lighting 2'x4'

| Non-Configurable BLT | | | | | | | | |
|----------------------|----------------------------|----------------|--------|---------|-----|-------------------|---------|------------|
| Stock/MTO | Catalog Description * | UPC | Lumens | Wattage | LPW | Color Temperature | Voltage | Pallet Qty |
| Stock | 2BLT4 40L ADP LP835 | 00190887470789 | 3945 | 34 | 116 | 3500K/82 CRI | 120-277 | 26 |
| | 2BLT4 40L ADP LP840 | 00190887470765 | 4032 | 34 | 118 | 4000K/82CRI | 120-277 | 26 |
| | 2BLT4 46L ADP LP835 | 00190887468656 | 4520 | 38.34 | 118 | 3500K/82 CRI | 120-277 | 26 |
| | 2BLT4 46L ADP LP840 | 00190887468649 | 4620 | 38.34 | 120 | 4000K/82CRI | 120-277 | 26 |
| | 2BLT4 40L ADP EL 14L LP835 | 00190887470925 | 3945 | 34 | 116 | 3500K/82 CRI | 120-277 | 26 |
| | 2BLT4 40L ADP EL 14L LP840 | 00190887470918 | 4032 | 34 | 118 | 4000K/82 CRI | 120-277 | 26 |
| | 2BLT4 46L ADP EL 14L LP835 | 00190887468670 | 4520 | 38.34 | 118 | 3500K/82 CRI | 120-277 | 26 |
| | 2BLT4 46L ADP EL 14L LP840 | 00190887468663 | 4620 | 38.34 | 120 | 4000K/82 CRI | 120-277 | 26 |
| MTO | 2BLT4 40L ADP 347 LP835 | | 3945 | 34 | 116 | 3500K/82 CRI | 347 | 26 |
| | 2BLT4 40L ADP 347 LP840 | | 4032 | 34 | 118 | 4000K/82CRI | 347 | 26 |
| | 2BLT4 46L ADP 347 LP835 | | 4520 | 38.34 | 118 | 3500K/82 CRI | 347 | 26 |
| | 2BLT4 46L ADP 347 LP840 | | 4620 | 38.34 | 120 | 4000K/82CRI | 347 | 26 |

*Generic 0-10V Dimming to 10%.

| Accessories: Order as separate catalog number. | |
|--|---|
| DGA24 | Drywall grid adapter for 2x4 recessed fixture |

| nLight® Wired Control Accessories: Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlight . | | | |
|--|---------------------|--|----------------------------|
| WallPod stations | Model number | Occupancy sensors | Model number |
| On/Off | nPODM [color] | Small motion 360°, ceiling (PIR / dual tech) | nCM 9 RJB / nCM PDT 9 RJB |
| On/Off & raise/lower | nPODM DX [color] | Large motion 360°, ceiling (PIR / dual tech) | nCM10 RJB / nCM PDT 10 RJB |
| Graphic touchscreen | nPOD GFX [color] | Wall switch with raise/lower | nWSX PDT LV DX [color] |
| Photocell controls | Model number | Cat-5 cable (plenum rated) | Model number |
| Full range dimming | nCM ADCX RJB | 10' cable | CAT5 10FT J1 |
| | | 30' cable | CAT5 30FT J1 |

| nLight® AIR Control Accessories: Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlightair . | |
|--|---------------------------|
| Wall switches | Model number |
| On/Off single pole | rPODB [color] |
| On/Off two pole | rPODB 2P [color] |
| On/Off & raise/lower single pole | rPODB DX [color] |
| On/Off & raise/lower two pole | rPODB 2P DX [color] |
| On/Off & raise/lower single pole | rPODBZ DX WH ¹ |

Notes

1 Can only be ordered with the RES7Z zone control sensor version.

| Replacement Parts: Order as separate catalog number. | | |
|--|------------------------------------|------------------------|
| *249P2N | 2DBLT48 ADP LENS ASSEMBLY | 4 ft. replacement lens |
| *249P2T | 2DBLT48 SDP LENS ASSEMBLY | 4 ft. replacement lens |
| *249P30 | 2DBLT48 ADSM LENS ASSEMBLY | 4 ft. replacement lens |
| *249P33 | 2DBLT48 SDSM LENS ASSEMBLY | 4 ft. replacement lens |
| *237LT2 | 2DBLT48 ADPT LENS ASSEMBLY | 4 ft. replacement lens |
| *237LT4 | 2DBLT48 SDPT LENS ASSEMBLY | 4 ft. replacement lens |
| *237LT6 | 2DBLT48 ADSMT LENS ASSEMBLY | 4 ft. replacement lens |
| *237LT8 | 2DBLT48 SDSMT LENS ASSEMBLY | 4 ft. replacement lens |
| *237LTA | 2DBLT48 ADPT SENSOR LENS ASSEMBLY | 4 ft. replacement lens |
| *237M52 | 2DBLT48 SDPT SENSOR LENS ASSEMBLY | 4 ft. replacement lens |
| *237M5A | 2DBLT48 ADSMT SENSOR LENS ASSEMBLY | 4 ft. replacement lens |
| *237M5L | 2DBLT48 SDSMT SENSOR LENS ASSEMBLY | 4 ft. replacement lens |

2BLT Volumetric Recessed Lighting 2'x4'


| Option | Sensor Options | | | | | |
|-------------|-----------------------------|-------------------|-----|-------------------------|-----------------------|-----------------|
| | Automatic Dimming Photocell | Occupancy Sensing | | nLight Wired Networking | nLight AIR Networking | nLight AIR Zone |
| | | PIR | PDT | | | |
| MSD7ADCX | X | X | | | | |
| MSDPDT7ADCX | X | | X | | | |
| NES7 | | X | | X | | |
| NES7ADCX | X | X | | X | | |
| NESPDT7 | | | X | X | | |
| NESPDT7ADCX | X | | X | X | | |
| RES7N | X | X | | | X | |
| RES7Z | X | X | | | | X |

Integrated Sensor with Individual Control

The MSD7ADCX PIR occupancy sensor/automatic dimming photocell is ideal for areas without obstructions and where daylight harvesting may be desired. Suggested applications include, but not limited to, hallways, corridors, storage rooms, and breakrooms or other areas where people are typically moving.

The MSDPDT7ADCX PIR/Microphonics Dual Tech occupancy sensor/automatic dimming photocell is ideal for areas with obstructions and where daylight harvesting is desired. Suggested applications include, but not limited to, open offices, private offices, classrooms, public restrooms, and conference rooms.

Sequence of Operation

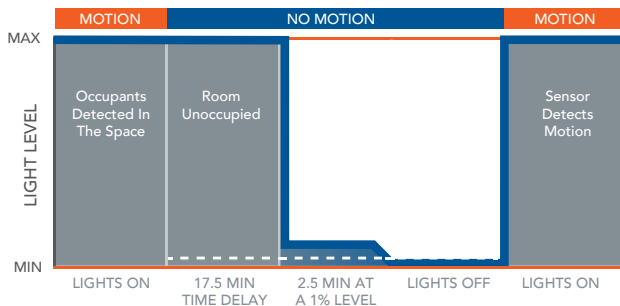


*The presetting on the automatic dimming photocell is 5fc.


Sensor Coverage Pattern Mini 360° Lens

- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and
- 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor

9 FT Mounting

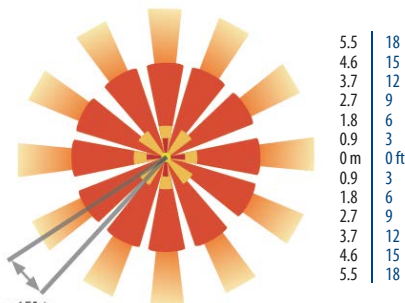

Lens rotates 15° to enable adjustment

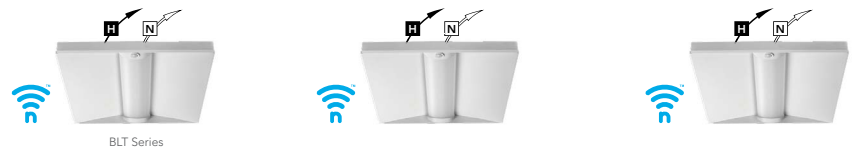

Simple as 1,2,3

1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With CLAIRITY app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome



nLight AIR iPODB 2P DX

Mobile Device

Basic nLight Zone




nLight Wired Networking

The nES 7 is ideal for small rooms without obstructions or areas with primarily walking motion. Ideal areas include hallways, corridors, storage rooms, and breakrooms. Additionally, the NES7ADCX includes an integrated photocell, which enables daylight harvesting controls.

For areas like restrooms, private offices, open offices, conference rooms or any space with obstructions, the nES PDT 7 dual technology sensor is recommended. The nES PDT 7 utilizes both PIR (passive infrared) and Microphonics technologies to detect occupancy. Additionally, the NESPDT7ADCX includes an integrated photocell, which enables daylight harvesting controls which is ideal for areas where windows are present.

Sequence of Operation

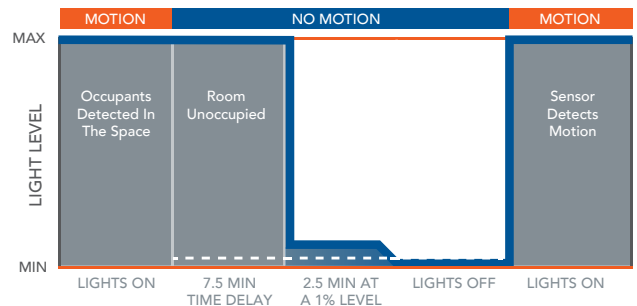

*The presetting on the automatic dimming photocell is 5fc.


nLight AIR Wireless

nLight AIR is the ideal solution for retrofit or new construction spaces where adding additional wiring can be labor intensive and costly. The integrated RES 7 smart sensor is part of each luminaire in the nLight AIR network, which can be grouped to control multiple luminaires. The granularity of control with the digital PIR occupancy detection and daylight sensing makes a great solution for any application.


2BLT Volumetric Recessed Lighting 2'x4'

PHOTOMETRICS

2BLT4 40L ADP LP835, 3945 delivered lumens, test no. LTL28918P37, tested in accordance to IESNA LM-79


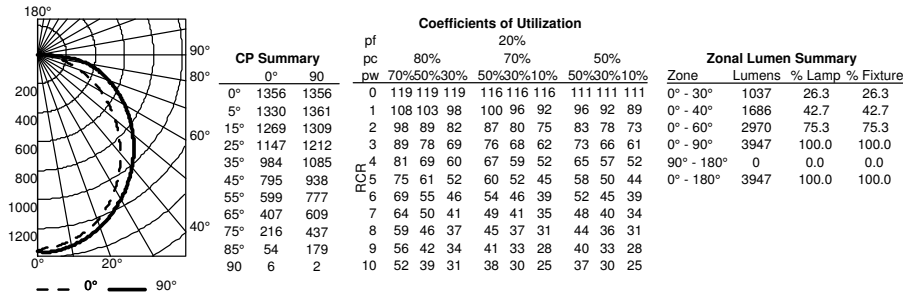


2BLT4 48L ADP LP835, 5121 delivered lumens, test no. LTL28918P41, tested in accordance to IESNA LM-79

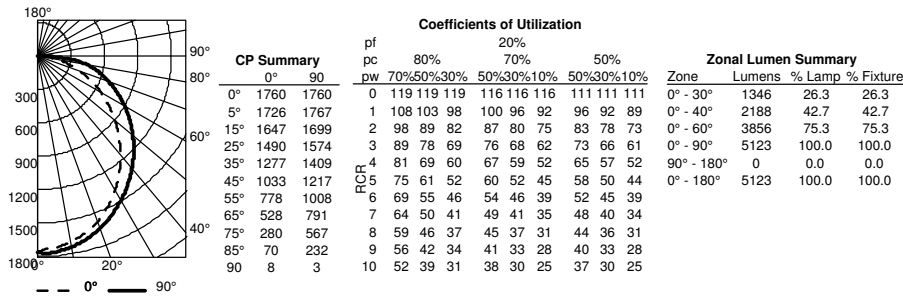

Constant Lumen Management


Enabled by the embedded nLight control, the BLT actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.



| Performance Data | | | |
|-------------------|--------|-------------|-----|
| Lumen Package | Lumens | Input Watts | LPW |
| 30L ADP LP830 | 3286 | 30 | 110 |
| 30L ADP LP835 | 3371 | 30 | 113 |
| 30L ADP LP840 | 3445 | 30 | 115 |
| 30L ADP LP850 | 3614 | 30 | 121 |
| 40L ADP LP830 | 3846 | 34 | 113 |
| 40L ADP LP835 | 3945 | 34 | 116 |
| 40L ADP LP840 | 4032 | 34 | 118 |
| 40L ADP LP850 | 4230 | 34 | 124 |
| 48L ADP LP830 | 4993 | 45 | 111 |
| 48L ADP LP835 | 5121 | 45 | 114 |
| 48L ADP LP840 | 5234 | 45 | 116 |
| 48L ADP LP850 | 5492 | 45 | 122 |
| 60L ADP LP830 | 6014 | 53 | 114 |
| 60L ADP LP835 | 6169 | 53 | 117 |
| 60L ADP LP840 | 6305 | 53 | 119 |
| 60L ADP LP850 | 6615 | 53 | 125 |
| 72L ADP LP830 | 7388 | 67 | 110 |
| 72L ADP LP835 | 7579 | 67 | 113 |
| 72L ADP LP840 | 7746 | 67 | 115 |
| 72L ADP LP850 | 8127 | 67 | 121 |
| AIR 30L ADP LP830 | 3075 | 30 | 103 |
| AIR 30L ADP LP835 | 3138 | 30 | 105 |
| AIR 30L ADP LP840 | 3223 | 30 | 108 |
| AIR 30L ADP LP850 | 3250 | 30 | 108 |
| AIR 40L ADP LP830 | 3599 | 34 | 105 |
| AIR 40L ADP LP835 | 3673 | 34 | 108 |
| AIR 40L ADP LP840 | 3772 | 34 | 110 |
| AIR 40L ADP LP850 | 3804 | 34 | 111 |
| AIR 48L ADP LP830 | 4672 | 45 | 104 |
| AIR 48L ADP LP835 | 4897 | 45 | 109 |
| AIR 48L ADP LP840 | 4897 | 45 | 109 |
| AIR 48L ADP LP850 | 4939 | 45 | 110 |
| AIR 60L ADP LP830 | 5628 | 53 | 106 |
| AIR 60L ADP LP835 | 5743 | 53 | 108 |
| AIR 60L ADP LP840 | 5899 | 53 | 111 |
| AIR 60L ADP LP850 | 5949 | 53 | 112 |
| AIR 72L ADP LP830 | 6914 | 67 | 103 |
| AIR 72L ADP LP835 | 7055 | 67 | 105 |
| AIR 72L ADP LP840 | 7247 | 67 | 108 |
| AIR 72L ADP LP850 | 7309 | 67 | 109 |

| HE Performance Data | | | |
|---------------------|--------|-------------|-----|
| Lumen Package | Lumens | Input Watts | LPW |
| 48LHE ADP LP830 | 4655 | 36 | 127 |
| 48LHE ADP LP835 | 4775 | 36 | 130 |
| 48LHE ADP LP840 | 4880 | 36 | 133 |
| 48LHE ADP LP850 | 5121 | 36 | 139 |
| 60LHE ADP LP830 | 5473 | 42 | 129 |
| 60LHE ADP LP835 | 5614 | 42 | 132 |
| 60LHE ADP LP840 | 5738 | 42 | 135 |
| 60LHE ADP LP850 | 6020 | 42 | 142 |
| 72LHE ADP LP830 | 6805 | 52 | 130 |
| 72LHE ADP LP835 | 6981 | 52 | 133 |
| 72LHE ADP LP840 | 7135 | 52 | 136 |
| 72LHE ADP LP850 | 7486 | 52 | 143 |
| 85LHE ADP LP830 | 8189 | 64 | 127 |
| 85LHE ADP LP835 | 8400 | 64 | 131 |
| 85LHE ADP LP840 | 8585 | 64 | 134 |
| 85LHE ADP LP850 | 9008 | 64 | 140 |

| MOUNTING DATA | |
|---------------------------------|-----------------------|
| Ceiling Type | Appropriate Trim Type |
| Exposed grid tee (1' and 9/16") | G |
| Concealed grid tee | G |
| Plaster or plasterboard | G* |



*DGA accessory available to provide ceiling trim flange and fixture support for plaster or plasterboard ceiling. Recommended rough-in dimensions for DGA installation is 24-3/4" x 48-3/4" (Tolerance is +1/8", -0").