



# LED Delux Series Snap-In Downlights

## Product Specifications



Ultra-thin meets ultra easy with Snap-In Downlights from TCP. You no longer need a recessed can or a junction box, snap-in downlights can be directly mounted to drywall, drop ceilings and other locations. Simply shape a hole and place the downlight inside.

### Reasons to choose the LED Recessed Retrofits from TCP

- Frosted lens for low glare
- Snap-in mounting springs, for use without junction box or recessed can
- Sturdy, steel encased, separated LED driver
- 75-120 watt incandescent equivalent
- Wide beam spread
- 120V Triac dimming
- Damp location rated
- IC rated
- Life: 40,000 hours
- Trim can be easily changed out for new color schemes
- Easy wiring access for quick install

### Ideal Applications

- Commercial
- Industrial
- Retail
- Hospitality
- Residential
- Healthcare



### Specifications:

Color Temperatures .....27K, 30K, 35K, 41K, 50K  
 Wattage..... 14W  
 Input Line Voltage ..... 120 VAC  
 Input Line Frequency..... 50/60HZ  
 Lamp Life (rated) ..... 40,000 hours  
 Minimum Starting Temp ..... -22F/-30C

Maximum Operating Temp..... 104°F/40°C  
 CRI..... 80

cULus approved for damp location (indoor only)—outdoor environment may cause yellowing of the white trim. This is not covered by warranty.

## Specifications:

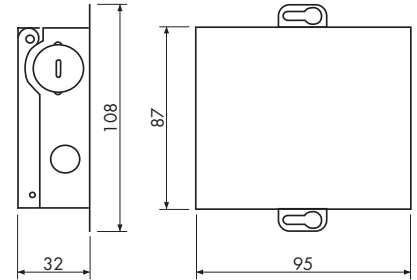

ITEM #	DESCRIPTION	ENERGY STAR V2.2	VOLTAGE	LED WATTS	REPLACEMENT	LUMENS	LPW	CRI	BEAM ANGLE	COLOR TEMP	MOL (inches)	DIA (inches)	CASE QTY
<b>LED DeLux Series Snap-In Downlights</b>													
<b>75 Watt Replacement • 40,000 Hour</b>													
DDC61D27K	LED 6" 14W DIM 75W White Trim- 2700K	★	120V	14	75	1100	78	80	110°	2700K	1.5	6.7	6
<b>DDC61D30K</b>	<b>LED 6" 14W DIM 75W White Trim- 3000K</b>	<b>★</b>	<b>120V</b>	<b>14</b>	<b>75</b>	<b>1100</b>	<b>78</b>	<b>80</b>	<b>110°</b>	<b>3000K</b>	<b>1.5</b>	<b>6.7</b>	<b>6</b>
DDC61D35K	LED 6" 14W DIM 75W White Trim- 3500K	★	120V	14	75	1100	78	80	110°	3500K	1.5	6.7	6
DDC61D41K	LED 6" 14W DIM 75W White Trim- 4100K	★	120V	14	75	1100	78	80	110°	4100K	1.5	6.7	6
DDC61D50K	LED 6" 14W DIM 75W White Trim- 5000K	★	120V	14	75	1100	78	80	110°	5000K	1.5	6.7	6

## Accessories:



### Changeable Trim Options

Item #	Description	MP	QTY
TR6BLK	Black 6 inch trim ring		20
TR6VHT	White 6 inch trim ring		20
TR6AGD	Antique Gold 6 inch trim ring		20
TR6SLV	Silver 6 inch trim ring		20
TR6RGD	Rose Gold 6 inch trim ring		20
TR6BRZ	Bronze 6 inch trim ring		20

### Adjustable Frame Kit is also available:

- Adjusts to fit both 4" and 6" downlights for use in T-Grid ceilings.

46INFRAMEKIT 4"/6" Adjustable Frame Kit

