


# Incandescent Lamps

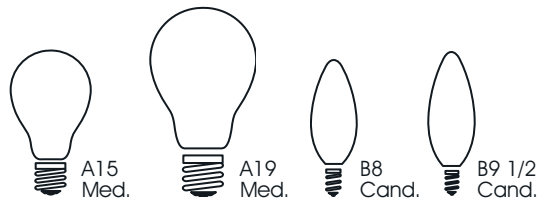

incandescent lamps

| Watts | Bulb             | Base         | Satco Product Number | Lamp Code   | Volts      | Finish           | Master/Inner Carton | Pkg. Type | Filament | Avg. Rated Hours | Lumens | MOL    | Notes |
|-------|------------------|--------------|----------------------|-------------|------------|------------------|---------------------|-----------|----------|------------------|--------|--------|-------|
| 25    | <br>A15 Med.     | Med.         | S3814                | 25A15/CL    | 130        | Clear            | 500/25              | Box       | C-9      | 2500             | 130    | 3 1/2" |       |
|       |                  |              | S3815                | 25A15/F     | 130        | Frosted          | 500/25              | Box       | C-9      | 2500             | 120    | 3 1/2" |       |
|       |                  |              | S4880                | 25A15/TF    | 130        | Frost ShatterPrf | 500/25              | Box       | C-9      | 2500             | 120    | 3 1/2" | 4     |
|       | <br>A19 Med.     | Med.         | S6040                | 25A19/CL    | 120        | Clear            | 120                 | 2pk       | C-9      | 2500             | 185    | 4 1/8" |       |
|       |                  |              | S3940                | 25A19/CL    | 130        | Clear            | 120                 | 2pk       | CC-6     | 2500             | 185    | 4 1/8" |       |
|       |                  |              | S6050                | 25A19/F     | 120        | Frosted          | 120                 | 2pk       | C-9      | 2500             | 185    | 4 1/8" |       |
|       |                  |              | S3950                | 25A19/F     | 130        | Frosted          | 120                 | 2pk       | CC-6     | 2500             | 185    | 4 1/8" |       |
|       |                  |              | S6080                | 25A/TR      | 130        | Trans Red        | 24/12               | Sleeve    | C-9      | 1000             | -      | 4 1/8" |       |
|       |                  |              | S6081                | 25A/TG      | 130        | Trans Green      | 24/12               | Sleeve    | C-9      | 1000             | -      | 4 1/8" |       |
|       |                  |              | S6082                | 25A/TB      | 130        | Trans Blue       | 24/12               | Sleeve    | C-9      | 1000             | -      | 4 1/8" |       |
|       |                  |              | S6083                | 25A/TY      | 130        | Trans Yellow     | 24/12               | Sleeve    | C-9      | 1000             | -      | 4 1/8" |       |
|       |                  |              | S6090                | 25A/R       | 130        | Cer Red          | 24/12               | Sleeve    | C-9      | 1000             | -      | 4 1/8" |       |
|       |                  |              | S6091                | 25A/G       | 130        | Cer Green        | 24/12               | Sleeve    | C-9      | 1000             | -      | 4 1/8" |       |
|       |                  |              | S6092                | 25A/B       | 130        | Cer Blue         | 24/12               | Sleeve    | C-9      | 1000             | -      | 4 1/8" |       |
|       |                  |              | S6093                | 25A/Y       | 130        | Cer Yellow       | 24/12               | Sleeve    | C-9      | 1000             | -      | 4 1/8" |       |
|       |                  |              | S5010                | 25A19/F/12V | 12         | Frosted          | 120/6               | Box       | C-6      | 1500             | 250    | 4 1/8" |       |
|       | S5020            | 25A19/F/34V  | 34                   | Frosted     | 120/6      | Box              | C-6                 | 1500      | 250      | 4 1/8"           |        |        |       |
|       | S5050            | 25A19/F/220V | 220                  | Frosted     | 120        | 2pk              | CC-2F               | 2500      | 180      | 4 1/8"           |        |        |       |
|       | <br>B8 Cand.     | Cand.        | S3346                | 25B8/Petite | 130        | Clear            | 500/25              | Box       | CC-2V    | 1500             | 212    | 3"     |       |
|       | <br>B9 1/2 Cand. | Cand.        | S3282                | 25B9 1/2    | 120        | Clear            | 500/25              | Box       | CC-2V    | 1500             | 212    | 3 1/2" |       |
|       |                  |              | S3782                | 25B9 1/2    | 120        | Clear            | 120/10              | CD/2      | CC-2V    | 1500             | 212    | 3 1/2" |       |
|       |                  |              | S4995                | KR25B9 1/2  | 120        | Clear            | 500/25              | Box       | CC-2V    | 2500             | 212    | 3 7/8" | 1     |
|       |                  |              | S3716                | KR25B9 1/2  | 120        | Clear            | 120/10              | CD/2      | CC-2V    | 2500             | 212    | 3 7/8" | 1     |
|       |                  |              | A3682                | 25B9 1/2    | 130        | Clear            | 500/25              | Box       | CC-2V    | 2500             | 193    | 3 1/2" |       |
|       |                  |              | A3582                | 25B9 1/2    | 130        | Clear            | 120/10              | CD/2      | CC-2V    | 2500             | 193    | 3 1/2" |       |
| S3285 |                  |              | 25B9 1/2/F           | 120         | Frosted    | 500/25           | Box                 | CC-2V     | 1500     | 212              | 3 1/2" |        |       |
| S3785 |                  |              | 25B9 1/2/F           | 120         | Frosted    | 120/10           | CD/2                | CC-2V     | 1500     | 212              | 3 1/2" |        |       |
| A3685 |                  |              | 25B9 1/2/F           | 130         | Frosted    | 500/25           | Box                 | CC-2V     | 2500     | 193              | 3 1/2" |        |       |
| A3585 |                  |              | 25B9 1/2/F           | 130         | Frosted    | 120/10           | CD/2                | CC-2V     | 2500     | 193              | 3 1/2" |        |       |
| S3288 |                  |              | 25B9 1/2/W           | 120         | Gloss Wht  | 500/25           | Box                 | CC-2V     | 1500     | 180              | 3 1/2" |        |       |
| S3788 |                  |              | 25B9 1/2/W           | 120         | Gloss Wht  | 120/10           | CD/2                | CC-2V     | 1500     | 180              | 3 1/2" |        |       |
| A3688 |                  |              | 25B9 1/2/W           | 130         | Gloss Wht  | 500/25           | Box                 | CC-2V     | 2500     | 163              | 3 1/2" |        |       |
| A3588 |                  |              | 25B9 1/2/W           | 130         | Gloss Wht  | 120/10           | CD/2                | CC-2V     | 2500     | 163              | 3 1/2" |        |       |
| S3218 |                  |              | 25B9 1/2/B           | 120         | Trans Blue | 500/25           | Box                 | CC-2V     | 1500     | -                | 3 1/2" |        |       |
| S3219 | 25B9 1/2/R       | 120          | Trans Red            | 500/25      | Box        | CC-2V            | 1500                | -         | 3 1/2"   |                  |        |        |       |
| S3813 | 25B9 1/2/A       | 120          | Trans Amber          | 500/25      | Box        | CC-2V            | 1500                | -         | 3 1/2"   |                  |        |        |       |

Customer Service 1-800-43-SATCO

When using a 130 Volt Lamp on a 120 Volt line, life is extended by approx. 2.5 times and lumens are reduced approx. 20%