
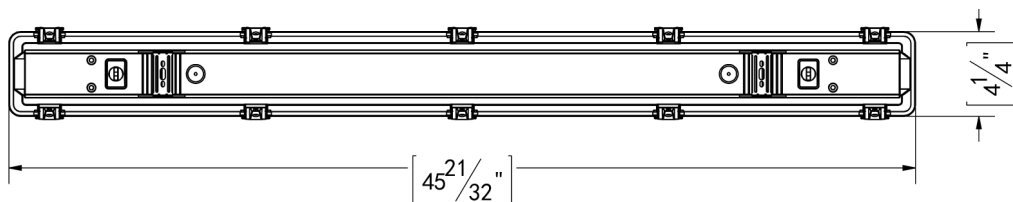


Vaportight LED Strip

DIMENSIONS

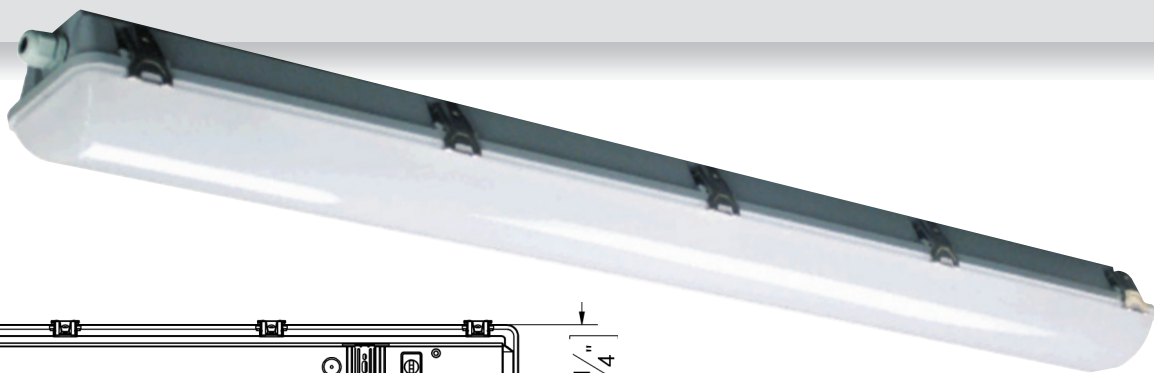

APPLICATION

The LVTS series is a next generation LED Vapor Tight fixture that provides maximum light output with durable construction. It is ideal for featuring a one piece polycarbonate housing and lens. The LVTS was designed to meet or exceed IES recommended foot-candle levels at installed heights for parking garages. Ideal for utility lighting, parking garages and stairwells; where meeting applicable building and safety codes is required.

FEATURES

- High-transmission Frosted Polycarbonate Lens
- Direct replacement for fluorescent
- DesignLights Consortium Qualified luminaire
- Full distribution LED Luminaire
- Stainless Steel Latches are standard
- Long life, 60,000 hour LEDs at L80 reduce lift cycle maintenance costs
- Optional On/Off or Bi Level Motion Sensor, High voltage transformers, emergency battery backups, cords and whips

CONSTRUCTION

UV stabilized, injection molded, impact resistant, polycarbonate housing. 20 gauge steel channel cover, highly efficient lens effectively reduces LED pixilation. Lens design and materials provide uniform appearance without pixilation.

MOUNTING

Quick mounting clips involved. Suitable for suspension or surface mounting.

ELECTRICAL

Equipped standard with fixed output driver. Optional 0-10V continuous dimming driver that works with any standard 0-10V control/dimmer. Long-Life LED's 60,000 hours at L80 with projected life over 100,000 hours for reduced life cycle maintenance costs Luminaire can be ceiling or suspend mounted. Power connection is easily accommodated through pre-drilled holes at each end, watertight plugs ship standard on each end.

CERTIFICATION

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Ingress protection IP65 Standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. Design Lights Consortium (DLC) qualified product. Not all models of this product maybe DLC qualified. Please check the DLC Product List.

WARRANTY

5-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

ORDERING INFORMATION

Example Model Number: LVTS-40-MV-850-OS

LVTS	8-68	MVD	850	EML8
SERIES	RATED WATTAGE	DRIVER TYPE	CRI AND KELVIN	OPTIONS
	48" Housing 40- 40W (4219 Lumens) ² 52- 52W (5200 Lumens) ² 96" Housing 68- 68W (6800 Lumens) ¹ 104-104W (11400 Lumens) ¹	MV- 120-277V ² MVD- 120-277V; 0-10V Dimming HVD-347-480V,0-10V Dimming HV-347-480V	840 - 80 CRI; 4000 Kelvin ^{1 2} 850 - 80 CRI; 5000 Kelvin	MOSB-FM- Fixture Mounted Bi-Level Microwave Sensor MOSB- Integrated Bi Level Microwave sensor MOS- Inegrated Microwave Sensor, On/Off OS- Fixture Mounted Occupancy Sensor FW3- 6', 3 Wire Fixture Whip FW4- 6', 4 Wire Fixture Whip EML8- Emergency Battery Pack, 800 Lumens
Notes: ¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity. ² DLC Listed ³ DLC Premium Listed				