

# WGH-1LU-M

Glass Wallpack

### Intended Use:

- Perimeter lighting for safety and security. Use on factories, warehouses, self storage, commercial buildings, etc.

### Construction:

- Borosilicate glass refractor softens lamp image and provides uniform distribution
- Cast aluminum frame holds lens and seals to housing gasket with two stainless steel screws.
- Door assembly hinges to side on mid-size units; hinges down on large units
- Cast aluminum housing with three 1/2" conduit entries (on top and sides), for button photocontrol or surface conduit
- All units have dark bronze powder paint finish

### LED:

- 1 high powered COB (chip on board)
- 3,959 lumens
- 5000K, 70 CRI

### Electrical:

- Driver: 1 x 40w, 950mA
- 120-277V 50/60Hz
- Driver RoHS and IP65


### Listings:

- Listed to UL1598 for use in wet locations

### PRODUCT IMAGE(S)



### DIMENSIONS

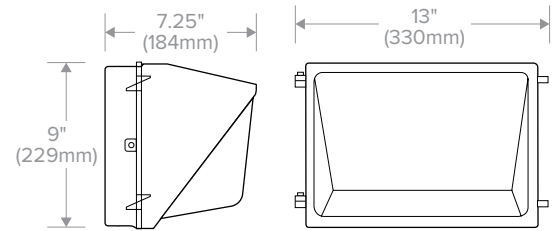

### CERTIFICATIONS/ LISTINGS



ID: PU1RNBQS

### Ordering Information

Catalog Number	Wattage	Number of LEDs	Voltage	Lumens	CCT	Weight lbs. (kg)
WGH-1LU-M-HE-SEC	40W	1 X COB	120-277V	3,959	5000k	12.0(5.4)

### Accessories/Replacement Parts - Order Separately

CATALOG NUMBER	DESCRIPTION
PBT-1	Photocontrol, 120V
PBT-234	Photocontrol, 208, 240, 277V
SM106-SHIELD	Polycarbonate Shield for M size
SM708-GUARD	Wire Guard for L size

### Electrical Data

# OF LEDs	# OF DRIVERS	CCT	INPUT VOLTAGE (V)	CURRENT (Amps)	SYSTEM POWER (w)	LUMENS	LPW
1	1	5K	120-277	2.91	40	3,959	107