



Item#: **PLT-20223**  
**LED 10" COMMERCIAL CAN**  
 INDOOR FIXTURE


**FEATURES**

- Energy efficient: save up to 80% in energy costs
- High lumen output
- Instant-On
- For covered ceilings only
- Suitable for TYPE IC Inherently Protected

**APPLICATION**

Ideal for retrofitting inefficient light sources for tall ceilings found in offices, airports, retail, malls, hospitals, lobbies and other commercial applications.

**LIGHT DISTRIBUTION CURVE**

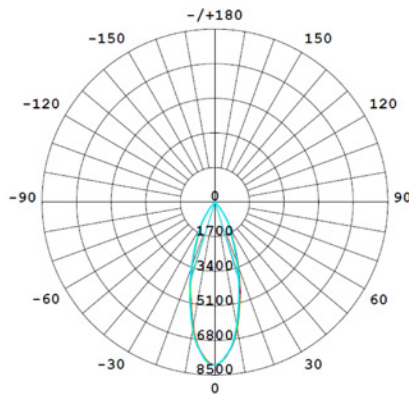

**ELECTRICAL**

Wattage	40W
Voltage	110-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	715

**LIGHTING PERFORMANCE**

Lumens	4050
Lumens Per Watt (Lm/W)	99
Color Temperature (CCT)	5000K
Color Rendering (CRI)	83
R9 (Red Value)	9
R13 (Skin Tones)	--
Beam Angle	50°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

**ENVIRONMENT**

Operating Temperature	-40° ~ 104°F
Suitable Location	<b>DAMP</b> Indoor / Covered Ceilings
Ingress Protection Rating	IP43

**LIFESPAN**

Average Life (Hours)	48,000
Warranty (Years)	<b>3</b>

**COMPONENTS**

LED Light Source	SMD3030
Driver	914516

**CONSTRUCTION**

Housing	Aluminum Alloy
Base / Power Supply	Hard Wired
Finish	Reflective

**QUALIFICATIONS**



Visit [www.energystar.gov](http://www.energystar.gov) to confirm Energy Star qualification. • Published lumens on LED products are approximate and may vary slightly.


# Item#: **PLT-20223**

## LED 10" COMMERCIAL CAN

### DIMENSIONS (Inches)

Length (MOL)	9.5"
Width/Diameter (MOD)	11.7"
Weight (Lbs)	7.7

Line drawings may not be to scale and are for general reference only.

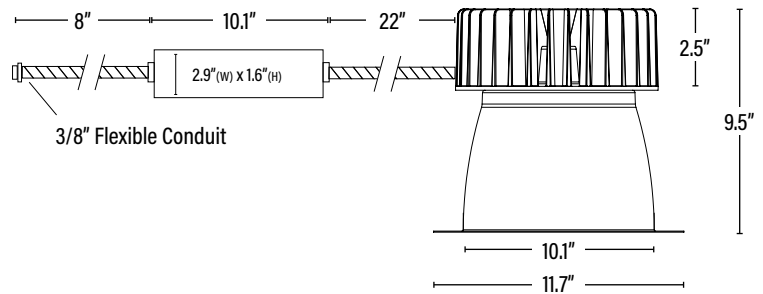

### PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768026023	14.2" x 13.8" x 13.4"	7.7
Country of Origin	China			
HS Tariff	9405.40.8200			

### ORDERING

ITEM#	DESCRIPTION	CASE
PLT-20223	LED COMMERCIAL 10" CAN/40W/50K/110-277V/DIMMABLE - <b>ENERGY STAR®</b>	1

### ACCESSORIES/REPLACEMENT PARTS

PLT-20252	EMERGENCY PACK FOR LED FIXTURE 25W/90 MIN - INTEGRATION TYPE	1
-----------	--	---