



Item#: **PLT-20219**
LED 8" COMMERCIAL CAN
 INDOOR FIXTURE


FEATURES

- Energy efficient: save up to 80% in energy costs
- High lumen output
- Instant-On
- For covered ceilings only
- Suitable for TYPE IC Inherently Protected

APPLICATION

Ideal for retrofitting inefficient light sources for tall ceilings found in offices, airports, retail, malls, hospitals, lobbies and other commercial applications.

LIGHT DISTRIBUTION CURVE

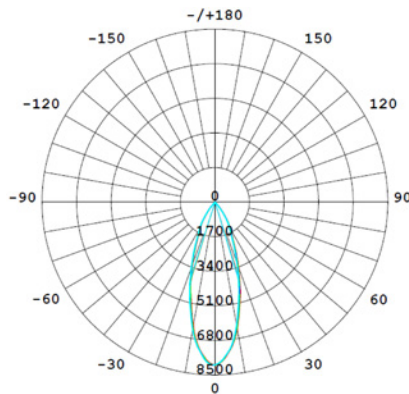

ELECTRICAL

Wattage	40W
Voltage	110-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	<25

LIGHTING PERFORMANCE

Lumens	4050
Lumens Per Watt (Lm/W)	99
Color Temperature (CCT)	4000K
Color Rendering (CRI)	83
R9 (Red Value)	10
R13 (Skin Tones)	--
Beam Angle	50°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	DAMP Indoor / Covered Ceilings
Ingress Protection Rating	IP43

LIFESPAN

Average Life (Hours)	48,000
Warranty (Years)	3

COMPONENTS

LED Light Source	SMD3030
Driver	914516

CONSTRUCTION

Housing	Aluminum Alloy
Base / Power Supply	Hard Wired
Finish	Reflective

QUALIFICATIONS



Visit www.energystar.gov to confirm Energy Star qualification. • Published lumens on LED products are approximate and may vary slightly.


Item#: **PLT-20219**

LED 8" COMMERCIAL CAN

DIMENSIONS (Inches)

Length (MOL)	8.5"
Width/Diameter (MOD)	9.5"
Weight (Lbs)	6.6

Line drawings may not be to scale and are for general reference only.

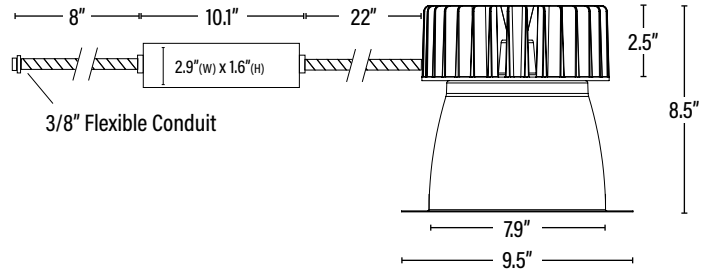

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768024517	13.4" x 11.8" x 13.4"	6.6
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE
PLT-2021J	LED COMMERCIAL 8" CAN/40W/40K/110-277V/DIMMABLE - ENERGY STAR	1

ACCESSORIES/REPLACEMENT PARTS

PLT-20252	EMERGENCY PACK FOR LED FIXTURE 25W/90 MIN - INTEGRATION TYPE	1
-----------	--	---

Note: The trim color of the 8" cans has been switched from chrome to white as of 2018, stock left over from 2017 will still have chrome trim.