

## DESCRIPTION

- Cost-effective architectural recessed LED Ready Troffer
- One to one alternative LED solution for fluorescent troffers
- Clean line styling complements today's modern office decor
- Utilizes 2 Single End Direct Wire LED Tubes (Sold Separately)
- Direct/indirect illumination provides visual comfort with minimal glare

## LISTINGS

- UL listed for damp locations
- IP40

## ELECTRICAL

- Input voltage: 120-277V
- Pre-wired non-shunted sockets

## INSTALLATION

- Designed for recess mounting in T-grid or dropped ceilings; see installation instructions for more information

## CONSTRUCTION

- Galvanized steel housing
- -4°F to 104°F operating temperature
- Perforated metal lamp shield protects the LED Tubes (Sold Separately) and provides even light distribution

## WARRANTY

- 3 year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



## APPLICATIONS


- Conference Rooms
- Retail
- Offices
- Hospitality
- Healthcare
- Schools
- Reception Areas
- Corridors
- Foyer

ELECTRICAL	Lamp Type (Not Included)	T8 Single End Direct Wire LED Lamps
	Number of Lamps	2
	Input Voltage	120 - 277
CONSTRUCTION	Housing	Die Formed Rigidly Fabricated 22 Gauge Steel
	Base Power Supply	Hard wired for Single End Direct Wire T8 LED Lamps
	Finish	High Gloss Baked White Enamel
LISTINGS	Certifications	UL Listed
	Operating Temperature	-4 to 104 Degrees F
	Environment	UL Damp Location Rated

PERFORMANCE SUMMARY

Item #	Length	Width	Height	Voltage	Warranty	Compatible Lamps
PLT-90193	47.8"	23.8"	5.5"	120-277	3 Years	Single End Direct Wire T8 LED Lamps

DIMENSIONS

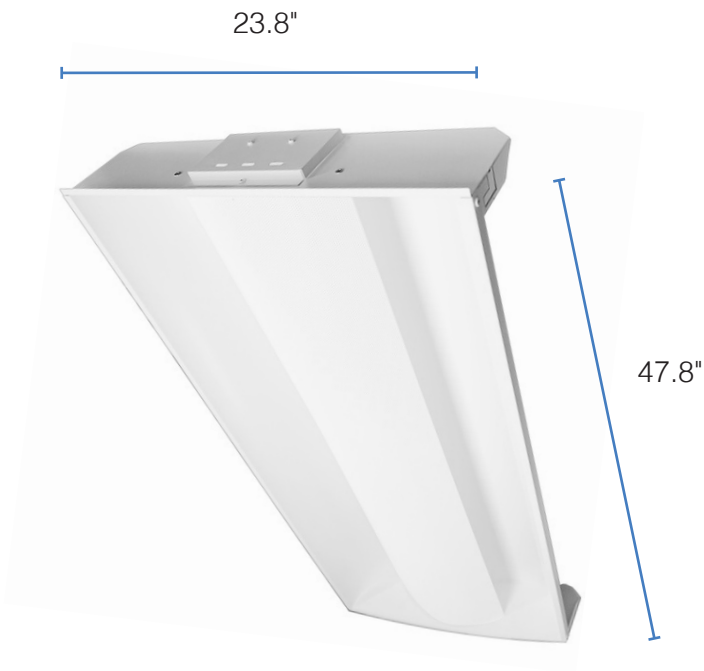

**DIMENSIONS**

Length: 47.8"  
Height: 5.5"  
Width: 23.8"  
Weight: 18 lbs.