



LED UFO HIGH BAY FIXTURE




PRODUCT FEATURES

- Die-Cast Aluminum Alloy Housing
- Black Finish
- IP65 Rating - Suitable for Wet Locations
- 100-277 Voltage Rating, PF > 0.9, THD < 20%
- CRI > 80
- Mercury and UV Free
- Dimming: 1-10V, PWM, VR
- Clear Tempered Glass Lens
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- UL / cUL Certified, Damp Location Rated
- Operating Temperature: -22°F to 122°F (-30°C to 50°C)


PRODUCT SPECIFICATIONS

Stock Code	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) D x H	EFFICIENCY (Lm/W)	BEAM ANGLE
PLTS-11964	150	20,250	5000	Ø 11.73 x 7.44	135	110°

DIAGRAM

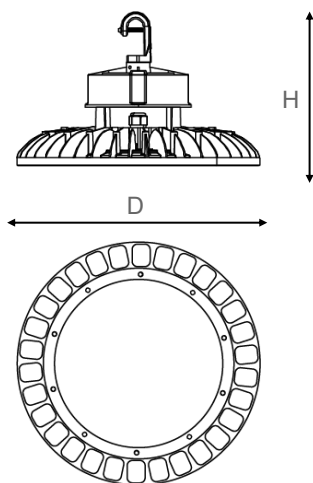

PHOTOMETRY

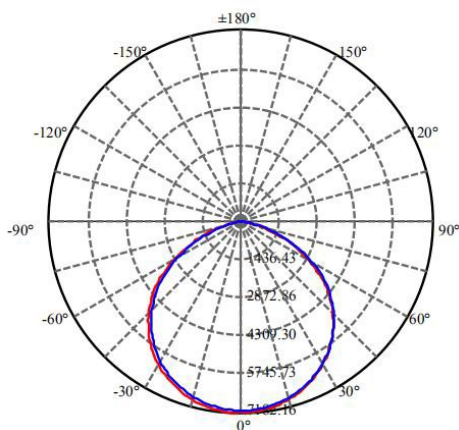

Height (m)	Max, Ave	Beam angle of CPlane 11.32
2.0m	1795.5, 1481.5 lx	585.52cm
3.0m	798.0, 658.4 lx	878.28cm
4.0m	448.9, 370.4 lx	1171.05cm
5.0m	287.3, 237.0 lx	1463.81cm
6.0m	199.5, 164.6 lx	1756.57cm
8.0m	112.2, 92.6 lx	2342.09cm