



# LED HID RETROFIT




## PRODUCT FEATURES

- Magnesium Alloy Housing
- Black Finish
- IP51 Rating
- 100-277 Voltage Rating, PF > 0.9
- CRI > 70
- 270° Rotatable Mogul Base (E39)
- Type III Light Distribution
- Clear Plastic Lens
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- UL / cUL Certified, Damp Location Rated
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)

## PRODUCT SPECIFICATIONS

Stock Code	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) (L x W x H)	EFFICIENCY (Lm/W)
PLTS-11966	115	13,600	5000	11.69 x 5.43 x 3.43	118

## PHOTOMETRY

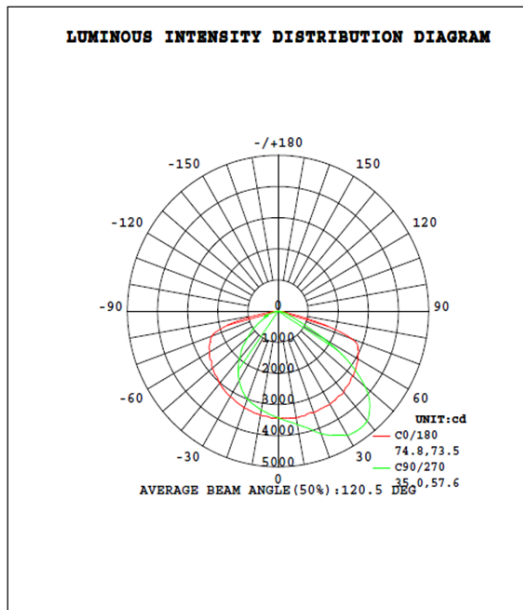

Flux out:6576 lm

1m	1952,3545lx	204.89cm
2m	488.0,886.2lx	409.78cm
3m	216.9,393.9lx	614.67cm
4m	122.0,221.6lx	819.56cm
5m	78.08,141.8lx	1024.46cm
6m	54.22,98.47lx	1229.35cm
7m	39.84,72.35lx	1434.24cm
8m	30.50,55.39lx	1639.13cm
9m	24.10,43.77lx	1844.02cm
10m	19.52,35.45lx	2048.91cm

Height      Avg,Emax      Angle:91.38deg      Diameter  
 Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

## DIAGRAM

