

LED Linear High Bay Installation Instruction

Rev:A0

Cautions:

1. Do not use an electric generator to test this fixture.
2. Please abide by related country, regional and local law and regulations when installing this fixture.
3. Please turn off the power before installation or maintenance.
4. Proper earth grounding is required to ensure safety.

Notice:

1. To avoid the possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire occurs, please turn off the power immediately and notify relevant personnel.
4. Please use an appropriate strain relief bushing when connecting the power supply cord to the outlet box.

Attention:

1. Please check if there is any damage during shipping. If so, please contact manufacturer at once.
2. Please read the installation instruction carefully to check whether all the accessories are complete. After confirmation, then install the fixture according to installation steps.

Wiring Diagram & Instruction:

- 3 dimming functions are available in this high bay light:
1. Constant current can be achieved by 0-10VDC dimming;
2. PWM signal dimming;
3. Variation of resistance unit dimming.


Description:	
This product is 0-10V dimming, below dimmers are recommended:	
Brand	Model
LUTON	NTSTV-DV
LEVITON	DS710-10Z / IP710
LEGRAND	RH4FBL3PW

Two wiring method:

1. Conduit connection,
2. Flexible cord for connection.

Wiring Instruction

- L: Black
N: White
⊕: Green/Yellow
DIM + : Purple
DIM - : Grey

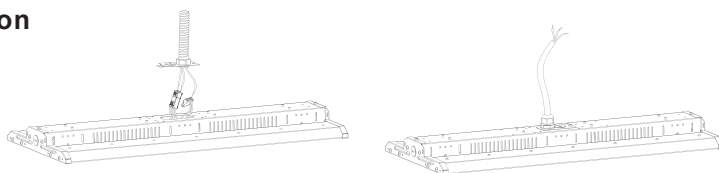

Please choose the appropriate dimming method according to your needs. You can also choose not to use this function.

*The product can not be connected to a dimming device when it's equipped with Motion Sensor.

Hanging Installation: (Chain/Cable)

- Step1. Hook up the chain; (Figure 1)
- Step2. Connect the chain with fixture; (Figure 1)
- Step3. Fix the chain on the rail, adjust the chain length as per need; (Figure 1)
- Step4. After the fixing, choose suitable wiring knock out, do wiring according to local standard and code.

(For wiring method: Conduit connection or flexible cord for connection.)



Any further questions or interests, please visit

www.pltsolutions.com


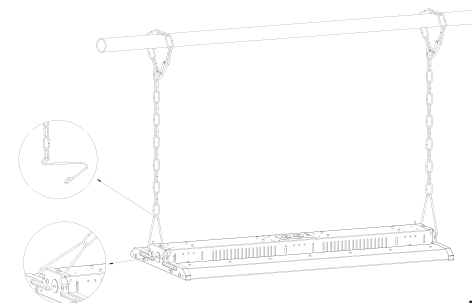


Figure 1


Wattage Selectable

Step1. Adjust to get the required wattage according to the wattage label.

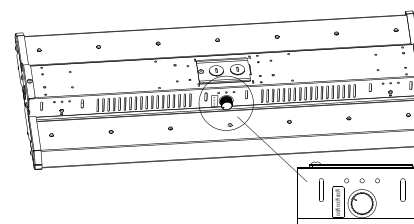

CCT Tunable:

Slide the switch left or right to change CCT.

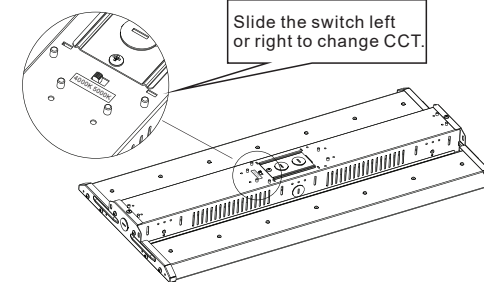

Warning / Avertissement

MIN 90 °C SUPPLY CONDUCTORS

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

LES FILS D'ALIMENTATION 90 °C MIN

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.



Any further questions or interests, please visit

www.pltsolutions.com