

**Rotatable Linear High Bay
Installation Instruction**

Rev:A0

Cautions:

1. Do not use an electric generator to test this fixture.
2. Please abide by related country, regional and local law and regulations when installing this fixture.
3. Please turn off the power before installation or maintenance.
4. Proper earth grounding is required to ensure safety.

Notice:

1. To avoid the possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire occurs, please turn off the power immediately and notify relevant personnel.

Attention:

1. Please check if there is any damage during shipping. If so, please contact manufacturer at once.
2. Please read the installation instruction carefully to check whether all the accessories are complete. After confirmation, then install the fixture according to installation steps.

Wiring Diagram & Instruction:


- 3 dimming functions are available in this high bay light;
1. Constant current can be achieved by 1-10VDC dimming;
 2. PWM signal dimming;
 3. Variation of resistance unit dimming.

Please choose the appropriate dimming method according to your needs. You can also choose not to use this function.

*The product can not be connected to a dimming device when it's equipped with Motion Sensor.

Wiring Instruction

- L:Black
- N:White
- ⊕: Green/Yellow
- +DIM: Purple
- DIM: Grey

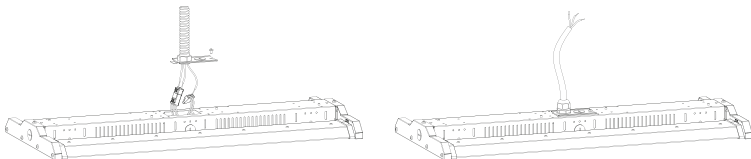

Hanging Installation: (Chain)

- Step1. Hook up the chain; (Figure 1)
- Step2. Connect the chain with fixture; (Figure 1)
- Step3. Fix the chain on the rail, adjust the chain length as per need; (Figure 1)
- Step4. After the fixture is installed, adjust the lighting direction of the module according to your needs (145 ° maximum adjustment from left to right). (Figure 2)

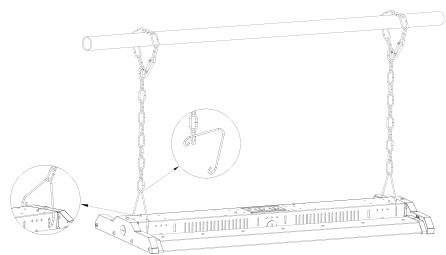


Figure 1

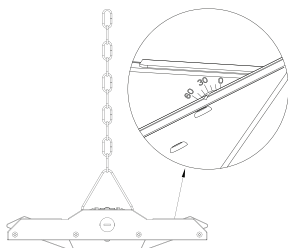


Figure 2



Any further questions or interests, please visit

www.pltsolutions.com

Possible maximum product weight(when specific mounts or function are chosen)

Power	Net Weight
165W	6.1KG Max
220W	6.7KG Max

Warning / Avertissement

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

CAUTION - RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR MIN 90°C SUPPLY CONDUCTORS

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS ATTENTION – RISQUE D'INCENDIE. CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS LES FILS D'ALIMENTATION 90 °C MIN



Any further questions or interests, please visit

www.pltsolutions.com