

DESCRIPTION

Featuring selectable wattage and color temperatures that allow you to adjust the light output as needed, these LED mini wall packs are an efficient choice for improving security lighting in outdoor areas.

FEATURES

- Delivers up to 140 LPW depending on the wattage selected
- Replaces 50W metal halide fixtures
- Integrated photocell for dusk till dawn operation
- 0-10V dimming
- Wattage and color temperature are adjusted via dip switch inside of fixture; see installation instructions for more information.

LISTINGS

- IP65 Rated
- UL Listed for wet locations
- BUG: B1-U3-G2
- DesignLights Consortium® 5.1 Premium - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN - PLTSN311111W

PERFORMANCE

- CRI: 80+
- CCT: 3000K, 4000K, and 5000K
- Rated Lifetime L70: 50,000 hours
- Philips Lumileds SMD LEDs

ELECTRICAL

- THD: ≤ 20%
- Power Factor: ≥ 0.9
- Input Voltage: 120-277V

THERMAL

- -40°F to 113°F (-40°C to 45°C) operating temperature

CONSTRUCTION

- Die-cast aluminum housing with bronze finish
- Polycarbonate lens

WARRANTY

- 5 year limited warranty; see pltsolutions.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



APPLICATIONS

- Security Lighting
- Pedestrian Lighting
- Parking Areas

PERFORMANCE SUMMARY


Item #	Watts	Lumens	LPW	CRI	CCT	Lens	Dimming	Voltage	Replaces	DLC Level	DLC #
PLTS-11946	8/10/15	2055/2235/2085	137/139/149	80+	3000K/4000K/5000K	Polycarbonate	0-10V	120-277V	MH50	5.1 Premium	PLTSN311111W

*See Selectable Table for full breakdown

SELECTABLE TABLE

Wattage	CCT	Lumen	Efficacy
8	3000K	1104	138
	4000K	1131.4	141.4
	5000K	1116	140
10	3000K	1442.5	144.25
	4000K	1504.7	150.47
	5000K	1480.4	148
15	3000K	2129	141
	4000K	2385	159
	5000K	2260	150

DIMENSIONS

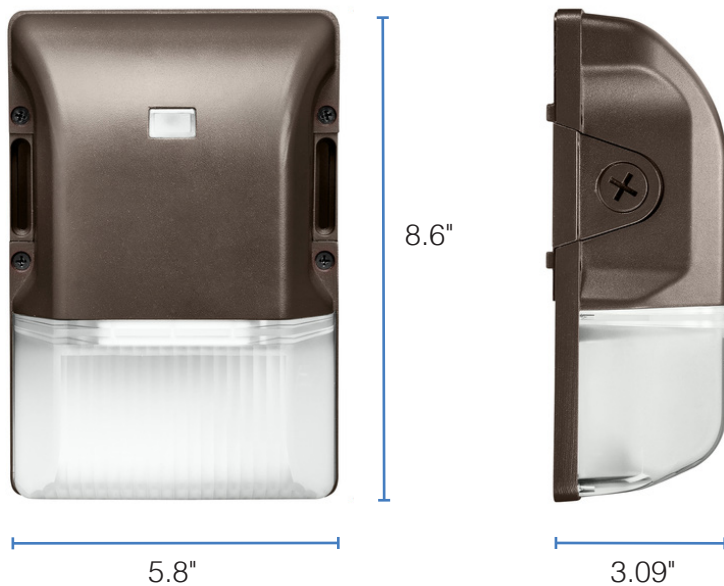

DIMENSIONS

Length: 5.8"
 Height: 8.6"
 Width: 3.09"
 Weight: 1.3 lbs.