

DESCRIPTION

Featuring selectable wattage and color temperatures that allow you to adjust the light output as needed, this LED wall pack has a rotatable LED panel that allows you to aim the light exactly where needed.

FEATURES

- Delivers up to 149 LPW depending on the wattage selected
- Optics rotate 350 degrees in each direction
- Replaces 70-150W metal halide fixtures
- 0-10V dimming
- Wattage and color temperature are adjusted via switches inside of fixture; see installation instructions for more information.

LISTINGS

- IP65 Rated
- UL Listed for wet locations
- DesignLights Consortium® 5.1 Premium - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC Part Number PLTSN511312

PERFORMANCE

- CRI: 70+
- CCT: 3000K, 4000K, and 5000K
- Rated Lifetime L70: 50,000 hours
- Seoul Semiconductor LEDs

ELECTRICAL

- THD: ≤ 20%
- Power Factor: ≥ 0.9
- Input Voltage: 120-277V

THERMAL

- -22°F to 113°F (-30°C to 45°C) operating temperature

CONSTRUCTION

- Aluminum alloy housing with white finish
- Non-yellowing polycarbonate lens

WARRANTY

- 5 year limited warranty; see pltsolutions.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date




APPLICATIONS

- Security Lighting
- Entrance Lighting
- Landscape Lighting
- Up or Down Lighting
- Wall Washing

PERFORMANCE SUMMARY

Item #	Watts	Lumens	LPW	CRI	CCT	Lens	Dimming	Voltage	Replaces	DLC Level	DLC #
PLTS-11954	13/19/25	1947/2775/3375	149/146/135	70+	3000K/4000K/5000K	Polycarbonate	0-10V	120-277V	MH70-150	5.1 Premium	PLTSN511312

DIMENSIONS

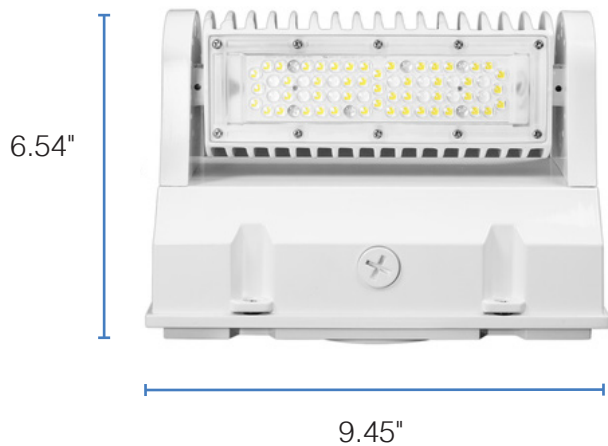

DIMENSIONS

Length: 6.54"
 Height: 9.45"
 Width: 5.87"
 Weight: 3.6 lbs.

PHOTOMETRICS

Luminous Intensity Distribution Curve

