



## LED LUMINAIRES



### ProLED® Select SekurPak Wallpack Series



The ProLED® Select SekurPak boasts a rugged, yet slim architectural form factor that provides incredibly efficient and high-quality illumination. The SekurPak features ProLED Select CCT field selectable technology, as well as an integral dusk-to-dawn photocell that can be enabled or disabled based on requirement. With these distinct features, the SekurPak is an ideal solution for all commercial, industrial and multi-residential security lighting applications.



#### Multiple Wattages

Selectable 3000K, 4000K  
& 5000K Color Temperature

Die Cast Aluminum Housing

Frosted Polycarbonate Lens

UL Listed for Wet Locations

5 Year Warranty

#### Applications:

- Building Facade
- Multi-Residential
- Commercial & Industrial
- Safety & Security
- Self Storage Properties

Contact Your Customer Care Specialist  
For Pricing, Orders And Technical Support.

800.677.3334 [www.halcolighting.com](http://www.halcolighting.com)

# ProLED® Select SekurPak Wallpack Series

Product #: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Comments: \_\_\_\_\_ Initials: \_\_\_\_\_

## Performance

- Impact resistant lens and cover
- Photocell can be enabled or disabled to user preference
- 120-277V AC Input Voltage

## Mounting

- 1/2" threaded conduit side entry points available for surface conduit
- Mounts directly to JBOX or wall

## Construction

- Die cast aluminum back plate and housing
- Frosted polycarbonate lens
- Textured architectural bronze powder-coat finish
- Silicone gasketing
- 1/2" Threaded conduit side entry points

## Listings

- cULus listed for Wet Locations, Outdoor
- DLC standard

## Ordering Logic

Example: SKWP-15-FS-U


Series	Wattage	CCT	Voltage	Finish	Options
SKWP = SekurPak	15 = 15Watt 20 = 20Watt 26 = 26Watt	FS = 3K/4K/5K CCT Selectable	U = 120-277V	Blank = Bronze	Blank = Photocell

## Ordering Information

Product SKU	Product Code	Product Description	Wattage	Color Temperature
10450	SKWP-15-FS-U	ProLED Select SekurPak, 15W, CCT Selectable, 120-277VAC	15	3000K/4000K/5000K
10451	SKWP-20-FS-U	ProLED Select SekurPak, 20W, CCT Selectable, 120-277VAC	20	
10452	SKWP-26-FS-U	ProLED Select SekurPak, 26W, CCT Selectable, 120-277VAC	26	

Performance Table				3000K			4000K			5000K		
Product Codes	Nominal Wattage	CRI	Power Factor	Actual Wattage	Lumens	Efficacy	Actual Wattage	Lumens	Efficacy	Actual Wattage	Lumens	Efficacy
SKWP-15-FS-U	15	80	>.9	15	1941	134	14	2061	148	15	2024	140
SKWP-20-FS-U	20			20	2456	123	19	2651	139	20	2551	126
SKWP-26-FS-U	26			26	3239	120	25	3484	138	27	3263	123

## Dimensions

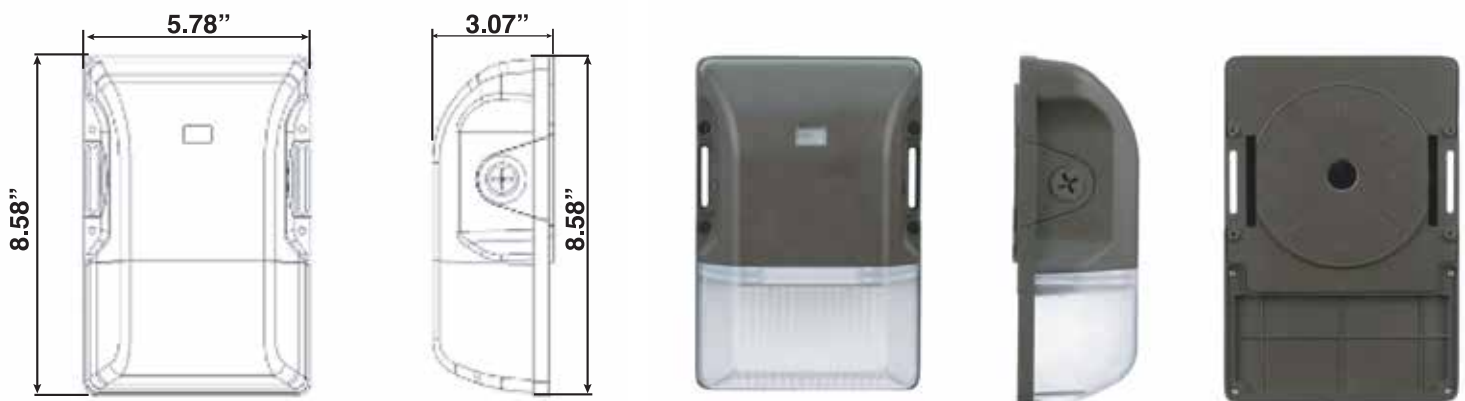

# ProLED® Select SekurPak Wallpack Series


Product #: \_\_\_\_\_ Type: \_\_\_\_\_  
 Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Comments: \_\_\_\_\_ Initials: \_\_\_\_\_

## Specification Table


SKWP	10450	10451	10452
Nominal Wattage (W)	15	20	26
Lumens Delivered (lm)	1940-2060 lm	2450-2650 lm	3240-3480 lm
Equivalency	100W MH	150W MH	175W MH
Efficacy (lm/W)	134-148	123-140	120-138
Beam Angle	100°		
CRI	>80		
Color Temperature (K)	3000K/4000K/5000K		
L70 Lifetime (hrs)	≥50,000 Hrs		
Voltage	120-277V		
Power Factor	≥0.90		
Housing	Die cast aluminum backplate and housing		
Lens	Frosted polycarbonate lens		
Mounting	Mounts directly to Jbox or wall; ½" threaded conduit hole available for surface conduit		
Operating Temperature	-4°F to 113°F		
Listings	DLC standard, cULus, FCC, IP65		
Environment	Wet locations, Outdoor		
Warranty	5 Years		

\*Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to operate past this point at decreased light levels.  
 May not be compatible with all dimming systems, dimming performance may vary by system.  
 Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase.


## Photometrics

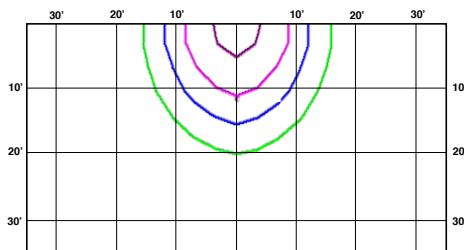

15W at 10" Mounting Height

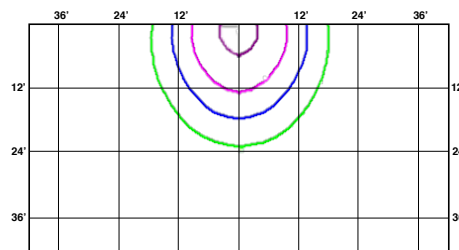

20W at 12" Mounting Height

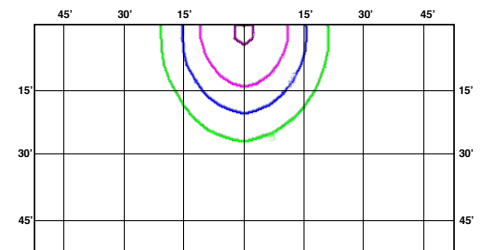

26W at 15" Mounting Height

# ProLED® Select SekurPak Wallpack Series

