

# ProLED® Security Wallpack Installation Instructions



## Application:

Available in industrial lighting, landscape lighting, courtyard, building, hotel, building exterior, etc.

## Caution:


1. Can not use the electric generator to test the LED lamp.
2. Please abide by related country, regional and local law and regulations when install this fixture.
3. Please don't install the fixture when raining to lower the risk of electric shock and avoid the failure.

## Note:


1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.

## Installation I:


1. Turn off the power




2. Loosen the 4 screws



3. Remove the 1/2 end cap




4. Peel off the yellow sticker and paste it on the round area of the bottom plate




# ProLED® Security Wallpack Installation Instructions




5. Fix the bottom plate on the round plate




6. Make wiring connection and make sure the good protection



7. Fix the fixture by 4 screws




8. Make sure good wiring and screws fastening, then turn on the power




## Installation II:


1. Turn off the power




2. Loosen the 4 screws



3. Paste the black sponge pad on the bottom plate



4. Screw the bottom plate on the wall

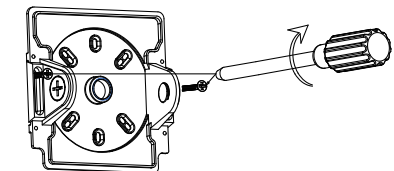


2.


# ProLED® Security Wallpack Installation Instructions




5. Remove one of the 1/2 end cap and get through wire




6. Make wiring connection and make sure the good protection

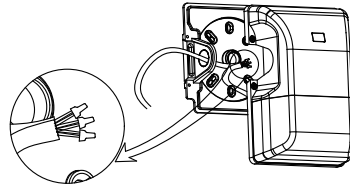


7. Return on the fixture to the bottom plate and tighten it with screws



8. Turn on the power after make sure good wiring and insulation



Note: if the lamp is designed with CCT adjustable function, After the product base is fixture, choose the requested CCT by dip switching.

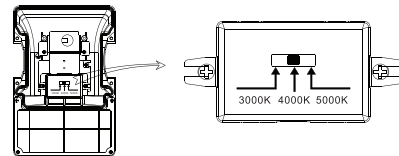

## Standard wire:

L/live wire:Black\Brown;  
N/null wire:White\Blue;  
Ground wire:Green\Yellow-green.

## Warning/Avertissement:

MIN 75 °C SUPPLY CONDUCTOR  
ECONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT  
THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE  
INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND  
OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED  
LES FILS D'ALIMENTATION 75 °C MIN  
CONDUCTOR CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER  
QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS  
CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION  
PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON  
FONCTIONNEMENT AINSI QUE LERISQUES INHÉRENTS

# ProLED® Security Wallpack Installation Instructions



## Warranty Information:

This product is warranted for five years from the date of purchase.  
If this product does not perform to the specifications supplied on this package, send an email or write to the address below for product return and replacement. This replacement is the sole remedy available.  
Liability for incidental or consequential damage is expressly excluded.  
Visit [www.halcolighting.com](http://www.halcolighting.com) for full warranty details and compatibility information.

Halco Lighting Technologies | 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.680.0822 | [halcolighting.com](http://halcolighting.com) | Atlanta | Chicago | Cleveland | Houston | Los Angeles | Phoenix  
© 2020 Halco Lighting Technologies, LLC. All rights reserved. Halco is a registered trademark of Halco Lighting Technologies. All sizes and specifications are subject to change.