



Catalog Number
Notes
Type

Contractor Select™  
**ECRG**  
 Lithonia Lighting Basics™  
 Emergency Light/Exit Combo

The Lithonia Lighting® ECRG, is a combination of exit and emergency lighting. The ECRG is ideal for safely illuminating the path of egress above-the-door in small spaces at lower mounting heights while providing 90 minutes of emergency power. Available in red and green letters.

**FEATURES:**

- Internal toggle switch for red or green exit
- Test switch and status indicator
- UL indoor damp location 50°F to 104°F (10°C to 40°C) listed standard
- ECRG RD: multi-voltage 120-277V, 50/60Hz
- ECRG SQ: dual-voltage 120/277, 60Hz



† Exit Signs Certified in the CA Title 20 Appliance Efficiency Database.

Catalog Number	UPC	Description	Supply Voltage	Input Wattage		Input Amps		Pallet Qty	Carton Qty
				120	277	120	277		
ECRG RD M6	00194994900412	Red/Green LED Exit/Unit Combo, Round Lamp Heads	120-277V	2W	2W	.03	.02	360	6
ECRG HO RD M6	00194994900429	Red/Green LED Exit/Unit Combo with remote capacity, Round Lamp Heads	120-277V	2.8W	2.8W	.05	.03	360	6
ECRG SQ M6	00194994900467	Red/Green LED Exit/Unit Combo, Square Lamp Heads	120/277V	3.5W	3.5W	.03	.02	360	6
ECRG HO SQ M6	00194994900504	Red/Green LED Exit/Unit Combo with remote capacity, Square Lamp Heads	120/277	4W	4W	.03	.02	360	6

**Battery Capacity and Loading (HO only)**

Battery	Total Capacity	Maximum# Remote Lamp Heads*
3.6V	2W (ECRG RD)	2 - ERE W SGL RD M24
		1 - ERE W T RD M24
		2 - ERE GY SGL WP RD M12
		1 - ERE GY T WP RD M12
3W (ECRG SQ)	3W (ECRG SQ)	3 - ERE GY SGL WP SQ M12
		1 - ERE GY T WP SQ M12

\* Remotes are in addition to the lamp heads on the product.

Accessories: Order as separate catalog number.	
ERE W SGL RD	Single, LED indoor remote head, round, ivory white, .75W, 3.6V input. See spec sheet <a href="#">ERE</a> . <sup>1</sup>
ERE W T RD	Twin, LED indoor remote head, round, ivory white, 1.5W, 3.6V input. See spec sheet <a href="#">ERE</a> . <sup>1</sup>
ERE GY SGL WP RD	Single, LED weather-proof head, round, gray, 0.75W, 3.6V input. See spec sheet <a href="#">ERE</a> . <sup>1</sup>
ERE GY T WP RD	Twin, LED weather-proof head, round, gray, 1.5W, 3.6V input. See spec sheet <a href="#">ERE</a> . <sup>1</sup>
ERE GY SGL WP SQ	Single, LED weather-proof remote head, square, gray, 1W, 3.6V-12V voltage sensing. See spec sheet <a href="#">ERE</a> . <sup>1</sup>
ERE GY T WP SQ	Twin, weather-proof, remote head, square, gray, 2W, 3.6V-12V voltage sensing. See spec sheet <a href="#">ERE</a> . <sup>1</sup>
ELA WG3	Wireguard, 30 5/8" W x 13 3/4" H x 6" D. See spec sheet <a href="#">ELA-WG</a> .
ELA WG2M	Wireguard, 21-1/4" W x 15" H x 12" D. See spec sheet <a href="#">ELA-WG</a> .

<sup>1</sup> Only available with HO option.



## Specifications

### INTENDED USE:

Provides a minimum of 90 minutes illumination for the rated wattage upon loss of AC power to meet code required emergency lighting. Ideal for applications requiring low profile, emergency unit for lower mounting heights. The ECRG has an internal switch that ships standard as a red emergency light/exit combo and can be switched in the field to green. It is also packaged standard with an extra faceplate along with red and green inserts.

### CONSTRUCTION:

The housing is a standard white thermoplastic with a compact and low-profile design with all-inclusive lamp, reflector and lens assembly. It is 5VA flame rated and impact-resistant.

### OPTICS:

The typical life of the LED is 10 years.  
 ECRG is 0.75W white LED per lamp head  
 ECRG SQ is 1W LED per lamp head.

CRI: RD 80CRI  
 SQ 75CRI  
 CCT: RD 6200K  
 SQ 6200K  
 Lumen: RD 85 lumens  
 SQ 113 lumens

### ELECTRICAL:

ECRG RD: multi-voltage 120-277V, 50/60Hz.  
 ECRG SQ: dual-voltage 120/277, 60Hz.  
 Bi-color LED status indicator for battery condition. (Green-normal, Red-check battery).  
 ECRG HO RD has 2W of remote capacity and ECRG HO SQ has 3W of remote capacity.  
 BATTERY: 3.6V maintenance-free, rechargeable, Nickel metal hydride.

### INSTALLATION:

Top, side and back mount. Mounting pattern on canopy (top and side mount) and back plate (back mount) fits most standard size junction boxes.

### LISTINGS:

UL Listed. Meets all applicable requirements for UL 924, NFPA 101 (current Life Safety Code), NFPA 70 (NEC), FCC Title 47, Part 15, Subpart B and OSHA.  
 Indoor damp location 50°F to 104°F (10°C to 40°C) listed.

### WARRANTY:


2-year limited warranty. Complete warranty terms located at:  
[www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

## Dimensions


### ECRG RD

Length: 16.46 (41.8)  
 Depth: 2.05 (5.2)  
 Height: 7.24 (18.3)  
 Weight: RD - 1.9 (0.86kgs)  
 HO RD - 1.95 (0.88kgs)

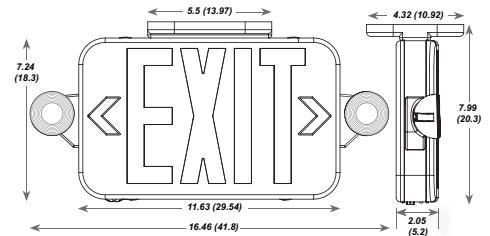

### ECRG SQ

Length: 19.09 (48.4)  
 Depth: 4.33 (10.9)  
 Height: 7.95 (20.1)  
 Weight: SQ - 3.09 lbs. (1.40kgs)  
 HO SQ - 3.25 lbs (1.47kgs)

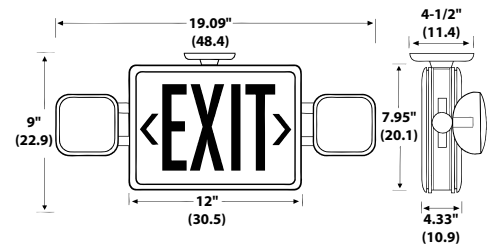

All dimensions are inches (centimeters) unless otherwise indicated.


## Spacing guidelines

Series	Mounting Height	Illumination Level	Maximum Spacing Guidelines <sup>1</sup>				Application Notes
			Single Luminaire		Multiple Luminaires		
			3' Path of Egress	6' Path of Egress	3' Path of Egress	6' Path of Egress	
ECRG RD	7.5'	1FC Avg	14'	10'	18'	14'	"100' Corridor 8' wide, and 9' high with 80/50/20 reflectances"
ECRG SQ	7.5'	1FC Avg	10'	6'	14'	11'	

### Notes:

- Also meets the additional illumination requirements of NFPA 101: 1FC minimum and max/min ratio of 40:1.

## ECRG RD

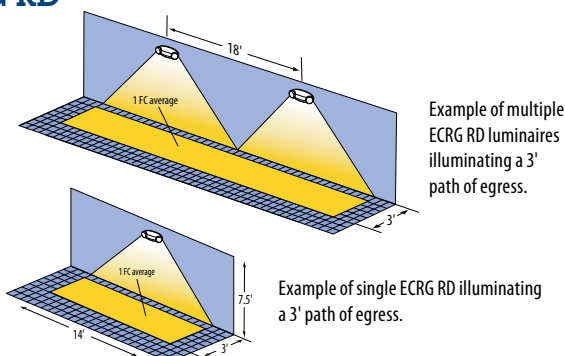

## ECRG SQ

