

## DESCRIPTION

Reduce energy and replacement costs by retrofitting existing recessed cans with these 5 to 6 inch LED downlights.

## FEATURES

- Energy efficient replacement for 65W incandescent downlights
- Medium (E26) base adapter
- Can be used in both IC and Non-IC rated housings
- Dimmable; see dimmer compatibility sheet for full list of compatible dimmers

## LISTINGS

- UL Listed for damp locations
- IC Rated
- FCC
- RoHS
- Energy Star Part Number PLTL7F1123

## PERFORMANCE

- CRI: 80
- CCT: 3000K
- Rated Lifetime L70: 35,000 hours

## ELECTRICAL

- Power Factor: 0.7
- Input Voltage: 120V

## CONSTRUCTION

- Plastic body with aluminum trim, both with white finish
- Frosted plastic lens

## WARRANTY

- 3 year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



## APPLICATIONS


- Offices
- Lobbies

PERFORMANCE	Power Consumption	11 Watt
	Lumens	750
	Efficacy (LPW)	68
	CRI	80
	CCT	3000K
	Life (L70)	35000
ELECTRICAL	Power Factor	0.7
	Input Voltage	120V
CONSTRUCTION	Base	E26
	Finish	White
	Lens	Plastic
LISTINGS	Certifications	UL Listed; FCC; IC Rated; Energy Star
	Material Usage	RoHS – No mercury or lead
	Environment	Damp Location Rated

# PERFORMANCE SUMMARY

Item #	UPC	Size	Lumens	Wattage	LPW	Voltage	Replaces	CCT	CRI	Life/Hours	Dimmable
PLTS-12004	842821113534	5-6"	750	11	68	120V	65W Incan.	3000K	80	35000	Yes

## DIMENSIONS

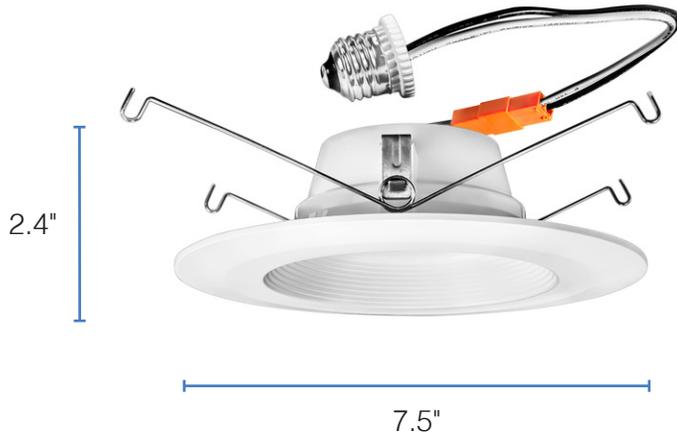

### DIMENSIONS


Outside Diameter: 7.5"

Inside Diameter: 3.62"

Height: 2.4"

Weight: 0.48 lbs.

## PHOTOMETRICS

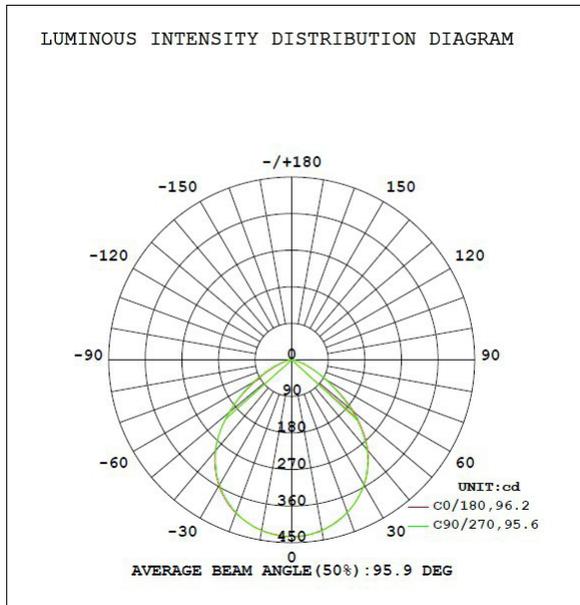

## WARNINGS

- Only use this LED downlight with the dimmers listed in the compatibility list. Using this downlight with incompatible dimmers may cause performance issues including humming, buzzing, flickering, and poor dimming performance.
- Minimum compartment dimensions for 5 inch cans are 5.6" in diameter by 7.7" in height.
- Minimum compartment dimensions for 6 inch cans are 6.4" in diameter by 7.3" in height.