

DESCRIPTION

Replace existing fluorescent vapor tight fixtures with these wattage and color selectable LED vapor tight fixtures to reduce energy and maintenance costs.

FEATURES

- Efficiently replaces a 2 lamp fluorescent fixture
- Delivers up to 132 LPW; output will vary depending on the wattage selected
- 0-10V dimming
- Wattage and color temperature are adjusted via dip switches on the driver; see installation instructions for more details

LISTINGS

- UL rated for wet locations
- IP65

PERFORMANCE

- CRI: >80
- CCT: 3500K, 4000K, and 5000K
- Rated Lifetime L70: 100,000 hours

THERMAL

- -40°F to 122°F (-40°C to 50°C) operating temperature

ELECTRICAL

- THD: < 20%
- Power Factor: 0.9
- Input Voltage: 120-277V
- Dimmable power supply (0-10V)

INSTALLATION

- Designed for surface mounting (mounting hardware included) or suspended mounting with included v-hooks (chain sold separately); see installation instructions for more information

CONSTRUCTION

- Polycarbonate housing with white finish and steel latches
- Polycarbonate lens protects LEDs while evenly distributing light

WARRANTY

- 5 year limited warranty; see pltsolutions.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date




APPLICATIONS

- Utility Lighting
- Stairwell Lighting
- Parking Garages
- Hallways

PERFORMANCE SUMMARY

Item #	Watts	Lumens	LPW	CCT	CRI	Dimming	Voltage	Replaces
PLTS-40045	25/30/34	3250/3900/4420	130/131/132	3500K/4000K/5000K	>80	0-10V	120 - 277V	2 Lamp Fluorescent

DIMENSIONS

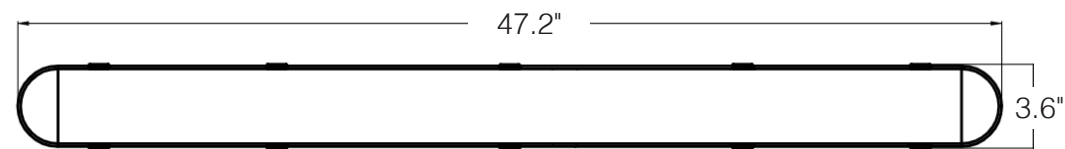

DIMENSIONS

Length: 47.2"
Height: 3.1"
Width: 3.6"
Weight: 4.4 lbs.

PHOTOMETRICS

