

LED Parking Garage Light Installation Instruction

Cautions:

1. Do not use an electric generator to operate this fixture.
2. Please abide by related country, regional and local law and regulations when installing this fixture.
3. Please turn off the power before installation or maintenance.
4. Proper earth grounding is required to ensure safety.


Notice:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire occurs, please turn off the power immediately and notify relevant personnel.

Attention:

1. Please check if there is any damage during shipping. If so, please contact manufacturer ASAP.
2. Please read the installation instruction carefully to check whether all the accessories are complete. After confirmation, then install the fixture according to installation steps.

Wiring Diagram:

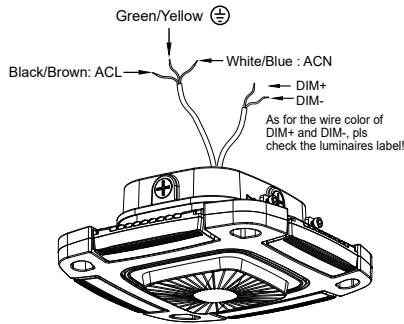

☑ Pendant Mount :

1. Disassemble the driver box cover by loosening the two screws on the driver box; Figure 1-1
2. Loosen the 3/4 plug on the driver box cover by screwdriver; Figure 1-2
3. Fix the driver box cover on the 3/4 tube; Figure 1-3
4. Insert the mounting holes horizontally to the shaft of driver cover; Figure 1-4
5. Connect ground/L/N wire inside driver rear cover. Take waterproof measures after wiring. Figure 1-5
6. Close the lamp body. Figure 1-6
7. Lock the two cap screws. Figure 1-7
8. Manually rotate the surrounding lighting modules to adjust the angle. Lock screws on the lighting modules, Installation completed. Figure 1-8




Figure 1-1




Figure 1-2




Figure 1-3




Figure 1-4




Figure 1-5




Figure 1-6




Figure 1-7




Figure 1-8

Surface Mount :

1. Disassemble the driver box cover by loosening the two screws on the driver box; Figure 2-1
2. Loosen the 3/4 plug on the driver box cover by screwdriver; Figure 2-2
3. Drill the holes on the ceiling accordingly to fit the plate; Figure 2-3
4. Fix the driver box cover on the ceiling; Figure 2-4
5. Insert the mounting holes horizontally on the shaft of driver cover; Figure 2-5
6. Connect ground/L/N wire inside driver rear cover. Take waterproof measures after wiring. Figure 2-6
7. Close the lamp body. Figure 2-7
8. Lock the two cap screws. Figure 2-8
9. Manually rotate the surrounding lighting modules to adjust the angle. Lock screws on the lighting modules, installation completed. Figure 2-9




Figure 2-1




Figure 2-2




Figure 2-3




Figure 2-4




Figure 2-5




Figure 2-6




Figure 2-7




Figure 2-8




Figure 2-9

Warning / Avertissement

MIN 75°C SUPPLY CONDUCTORS

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

LES FILS D'ALIMENTATION 75°C MIN

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.