



# LED Adjustable Shape PL Lamps

Type AB  
120-277v



These energy efficient lamps are the perfect solution for replacing fluorescent PL lamps. Designed for use in commercial downlights, they are ideal for a variety of retail, office and hospitality applications.

## Reasons to choose the LED Adjustable Shape PL lamps from TCP

- Electronic Ballast compatible or Bypass installation
- Energy saving of over 50%
- Long life of 50,000 hours with a 5 year warranty
- Can be installed horizontally or vertically
- Dimmable with recommended 0-10v dimming ballast for best performance
- 90° adjustable head, extendable body, rotatable base

## Ideal Applications


- Recessed downlights
- Track and display lights
- Sconces
- General lighting

## Specifications:

Voltage..... 120-277v (Type A or Type B)  
 Input Line Frequency..... 50/60HZ  
 Lamp Life (Rated) ..... 50,000 hours  
 Minimum Starting Temp ..... -22°C  
 Maximum Operating Temp.....40°C

CRI..... 80  
 Beam Angle ..... 110°  
 Power Factor ..... 0.99  
 Base .....G24q/GX24q

## Specifications:

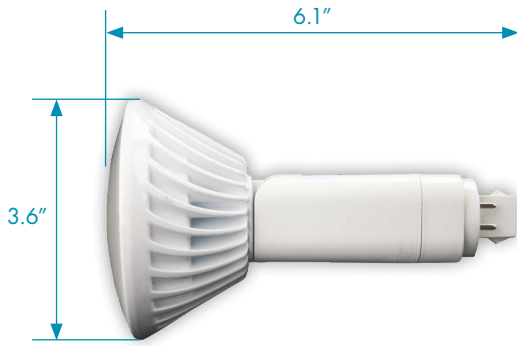

ITEM #	DESCRIPTION	VOLTAGE	WATTS	CFL BALLAST EQUIVALENT	LUMENS	CCT	HOURS	CRI	MOL (inches)	DIA (inches)	BASE	WARRANTY YEARS	CASE QTY
<b>Adjustable Shape – Type A/B – Dimmable* • 50,000 Hours</b>													
			<b>A/B</b>		<b>A/B</b>								
LAPL42AB5027K	LED 21W PL ADJ BR30 27K	120-277v	21/19	32-42	1800/2100	2700K	50,000	80	6.1	3.6	G24q/GX24q	5	12
LAPL42AB5030K	LED 21W PL ADJ BR30 30K	120-277v	21/19	32-42	1900/2200	3000K	50,000	80	6.1	3.6	G24q/GX24q	5	12
LAPL42AB5035K	LED 21W PL ADJ BR30 35K	120-277v	21/19	32-42	1925/2200	3500K	50,000	80	6.1	3.6	G24q/GX24q	5	12
LAPL42AB5041K	LED 21W PL ADJ BR30 41K	120-277v	21/19	32-42	1925/2200	4100K	50,000	80	6.1	3.6	G24q/GX24q	5	12
LAPL42AB5050K	LED 21W PL ADJ BR30 50K	120-277v	21/19	32-42	1925/2200	5000K	50,000	80	6.1	3.6	G24q/GX24q	5	12

Suitable for use in enclosed luminaires.

\*0 - 10v Dimmable in Type A mode only. Not dimmable in Type B mode.