

Reduce energy costs by replacing halogen PAR38 bulbs in your recessed and track lighting with these more efficient LED PAR38 bulbs.

**FEATURES**

- Efficiently replaces a 120W halogen PAR38 bulb
- Standard household medium (E26) base
- Dimmable; see dimmer compatibility sheet for a full list of dimmers

**LISTINGS**

- UL Listed for wet locations
- FCC
- RoHS

**PERFORMANCE**

- CRI: 80
- CCT: 2700K
- Rated Lifetime L70: 15,000 hours

**WARRANTY**

- 1 year limited warranty; see pltsolutions.com for warranty details

**APPLICATIONS**

- Track Lights
- Recessed Cans

project name	type
catalog number	
comments	voltage
approved by	date




<b>PERFORMANCE</b>	Power Consumption	15 Watt
	Lumens	1250
	Efficacy (LPW)	83
	CRI	80
	Beam Angle	40 Degrees
	CCT	2700K
	Life (L70)	15000
<b>ELECTRICAL</b>	Input Voltage	120V
<b>CONSTRUCTION</b>	Shape	PAR38
	Base	E26
	Finish	Frosted
<b>LISTINGS</b>	Certifications	UL Listed; FCC
	Material Usage	RoHS – No mercury or lead
	Environment	Wet Location Rated

## PERFORMANCE SUMMARY

Item #	Shape	Lumens	Wattage	LPW	Voltage	Replaces	CCT	CRI	Finish	Life/Hours	Dimmable
PLTS-12095	PAR38	1250	15	83	120V	120W Halogen	2700K	90	Frosted	15000	Yes

## DIMENSIONS

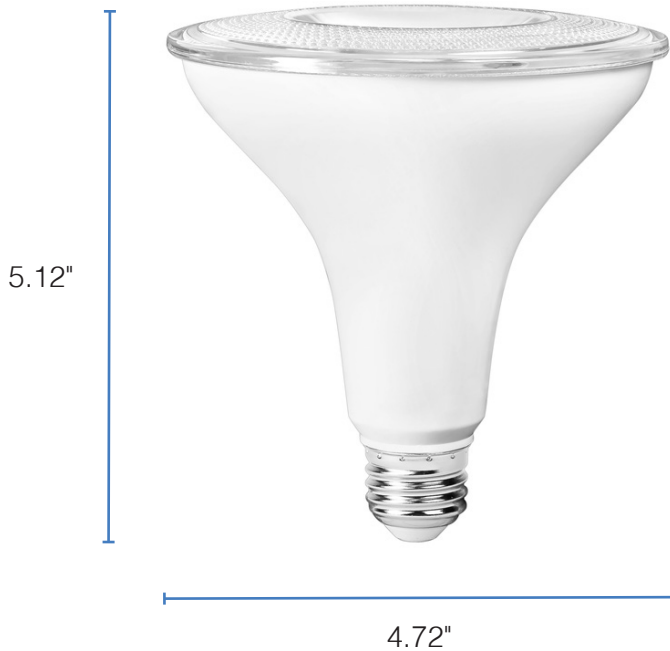

### DIMENSIONS

Height: 5.12"

Diameter: 4.72"

## DIMMER COMPATIBILITY

**Lutron** MACL-153M-WH, DVCL-153P-WH, PD-6WCL-WH-P, CTCL-153PDH-WH, P-PKG1W-WH, P-PKG1W-WH-R, DIVA DVELV-300P-WH, NLV-1000-LA, SKYLARK SLV-600P-WH, RADIORA2 RRD-6CL-WH, CL DIMMER TOGGLER, CASEFA WIRELESS, DIVA CL

**Olegrand** RHCL453PW

**Leviton** WHITE NO.6674 600W, NO.6672 600W, NO.IPL06 600W, MACL-153MH-WH, TGCL-153P-WH, DVCL-153PR-WH, DW6HD-1BZ, SLIDE DIMMER, SLIDE DIMMER 3WAY, NO.IPL06 R50-IPL06-10M, DSL06-001-1LZ, 06674-002-10W, RDL06-001-10Z, DSE06-001-10Z, DDMX1-011-BLZ, DDE06-BLZ 600W

**Martin Jerry** MJ-SD01

**TP Link** Kasa Smart HS220

## WARNINGS

- Only use this LED PAR38 bulb with the dimmers listed in the compatibility list. Using this bulb with incompatible dimmers may cause performance issues including humming, buzzing, flickering, and poor dimming performance.
- Not rated for use in enclosed fixtures.