

LED CORN LAMP

DESCRIPTION

Reduce energy and maintenance costs by replacing 150W metal halide bulbs with these more efficient 36W LED corn bulbs.

FEATURES

- Delivers 155 LPW for highly efficient performance
- Mogul E39 base
- Ballasts, capacitors, and starters must be removed (bypassed) from fixture during installation; see installation instructions for more information

LISTINGS

- UL rated for damp locations
- Rated for use in enclosed fixtures
- FCC Part 15
- IP64
- CE
- RoHS
- DesignLights Consortium® 5.1 Standard meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN - PLTBG322

PERFORMANCE

CRI: >80CCT: 4000K

LED L70 Life Hours: ≥100,000 hours

Philips Lumiled LEDs

THERMAL

-40°F to 113°F or (-40°C to 45°C) operating temperature

ELECTRICAL

• THD: <20%

Power Factor: >0.9Input Voltage: 120-277VSurge Protection: 2kV

| project name | type |
|----------------|---------|
| catalog number | |
| comments | voltage |
| approved by | date |



RoHS Compliant







WARRANTY

 5 year limited warranty; see pltsolutions.com for warranty details

APPLICATIONS

- Warehouses
- Parking Lot Lights
- Security Lighting
- Post Top Lights


| | Power Consumption | 36 Watt | | | |
|--------------|--------------------------|---|--|--|--|
| | Bare Lamp Lumens | 5580 | | | |
| | Bare Lamp Efficacy (LPW) | 155 | | | |
| | Fixture Lumens* | 4254 | | | |
| PERFORMANCE | Fixture Efficacy (LPW)* | 125 | | | |
| | CRI | >80 | | | |
| | сст | 4000K | | | |
| | LED L70 Life Hours | ≥100,000 | | | |
| | Beam Angle | 360 Degree | | | |
| | Power Factor | <20% | | | |
| ELECTRICAL | THD | >0.9 | | | |
| | Input Voltage | 120-277V | | | |
| CONSTRUCTION | Operating Temperature | -40°F to 113°F or (-40°C to 45°C) | | | |
| CONSTRUCTION | Base | E39 | | | |
| | Certifications | UL Listed; FCC; CE; IP64; DLC Standard 5.1 | | | |
| LISTINGS | Material Usage | RoHS - No mercury or lead | | | |
| | Environment | Enclosed Fixture Rated; Damp Location Rated | | | |

*Fixture lumens and efficacy based on testing in DLC approved fixture.

PERFORMANCE SUMMARY

| Item # | Watts | Base Lamp Lumens | Base Lamp LPW | Voltage | Replaces | ССТ | CRI | Beam | LED L70 Life Hours | DLC Level | DLC # |
|------------|-------|---------------------|------------------|----------|----------|-------|-----|------|-----------------------|---------------------|----------|
| PLTS-12052 | 36 | 5580 | 155 | 120-277V | MH150 | 4000K | >80 | 360° | ≥100,000 | DLC Standard 5.1 | PLTBG322 |

DIMENSIONS

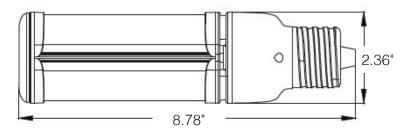

DIMENSIONS

Height: 8.78" Width: 2.36"

Weight: 0.84 lbs

PHOTOMETRICS

