

#### DESCRIPTION

Reduce energy and maintenance costs by replacing 175W metal halide bulbs with these more efficient 45W LED corn bulbs.

### **FEATURES**

- Delivers 155 LPW for highly efficient performance
- Mogul E39 base
- Ballasts, capacitors, and starters must be removed (bypassed) from fixture during installation; see installation instructions for more information

#### LISTINGS

- UL rated for damp locations
- Rated for use in enclosed fixtures
- FCC Part 15
- IP64
- CE
- RoHS
- DesignLights Consortium® 5.1 Standard meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN - PLTBG422

#### PERFORMANCE

- CRI: >80
- CCT: 4000K
- LED L70 Life Hours: ≥100,000 hours
- Philips Lumileds LEDs

### THERMAL

-40°F to 113°F or (-40°C to 45°C) operating temperature

## ELECTRICAL

• THD: <20%

Power Factor: >0.9 Input Voltage: 120-277V Surge Protection: 2kV

project name	type
catalog number	
comments	voltage
approved by	date



<b>RoHS</b>
Compliant







### WARRANTY

 5 year limited warranty; see pltsolutions.com for warranty details

#### **APPLICATIONS**

- Warehouses
- Parking Lot Lights
- Security Lighting
  Post Top Lights


	Power Consumption	45 Watt				
	Bare Lamp Lumens	6975				
	Bare Lamp Efficacy (LPW)	155				
	Fixture Lumens*	5153				
PERFORMANCE	Fixture Efficacy (LPW)*	119				
	CRI	>80				
	сст	4000K				
	LED L70 Life Hours	≥100,000				
	Beam Angle	360 Degree				
	Power Factor	<20%				
ELECTRICAL	THD	>0.9				
	Input Voltage	120-277V				
CONSTRUCTION	Operating Temperature	-40°F to 113°F or (-40°C to 45°C)				
CONSTRUCTION	Base	E39				
	Certifications	UL Listed; FCC; CE; IP64; DLC				
LISTINGS	Material Usage	RoHS - No mercury or lead				
	Environment	Enclosed Fixture Rated; Damp Location Rated				

\*Fixture lumens and efficacy based on testing in DLC approved fixture

### PERFORMANCE SUMMARY

Item #	Watts	Bare Lamp Lumens	Bare Lamp LPW	Voltage	Replaces	ССТ	CRI	Beam	LED L70 Life Hours	DLC Level	DLC #
PLTS-12058	45	6975	155	120-277V	MH175	4000K	>80	360°	≥100,000	5.1 Standard	PLTBG422

# DIMENSIONS

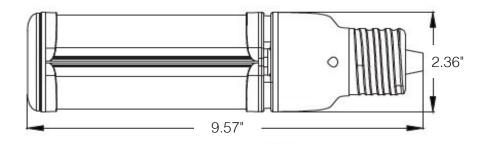

## **DIMENSIONS**

Height: 9.57" Width: 2.36"

Weight: 0.99 lbs

## **PHOTOMETRICS**

