

DESCRIPTION

Reduce energy and maintenance costs by replacing 250W metal halide bulbs with these more efficient 80W low bay LED retrofit lamps with adjustable panels.

FEATURES

- 4 adjustable panels can be angled from 0° to 90°; illuminates an area of at least 270° when fully open and 360° when all panels are folded
- Medium E26 base
- White finish

LISTINGS

- UL rated for damp locations
- FCC Part 15
- RoHS

PERFORMANCE

- CRI: 80
- CCT: 5000K
- Rated lifetime L70: >20,000 hours

THERMAL

- -40°F to 104°F (-40°C to 40°C) operating temperature

ELECTRICAL

- THD: <20%
- Power Factor: 0.9
- Input Voltage: 120-277V

WARRANTY

- 5 year limited warranty; see pltsolutions.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



APPLICATIONS


- Garages
- Workshops
- Warehouses

PERFORMANCE	Power Consumption	80 Watt
	Lumens	10,000
	Efficacy (LPW)	125
	CRI	80
	CCT	5000K
	Life (L70)	>20,000
ELECTRICAL	Power Factor	0.9
	THD	<20%
	Input Voltage	120-277V
CONSTRUCTION	Operating Temperature	-40°F to 104°F (-40°C to 40°C)
	Base	E26
LISTINGS	Certifications	UL Listed; FCC
	Material Usage	RoHS – No mercury or lead
	Environment	Damp Location Rated

PERFORMANCE SUMMARY

Item #	Watts	Lumens	LPW	Voltage	Replaces	CCT	CRI	Beam	Life/Hours
PLTS-12179	80	10,000	125	120-277V	MH250	5000K	80	270°-360°	>20,000

DIMENSIONS

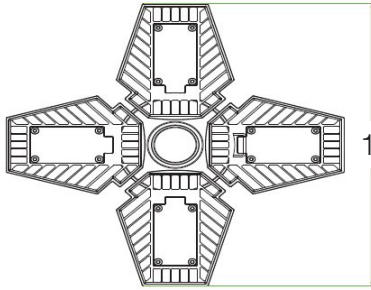


10.53"

DIMENSIONS

Panels Fully Extended

Height: 3.81"

Width: 10.53"



5.43"


DIMENSIONS

Panels Closed


Height: 4.33"

Width: 5.43"

Weight: 1.26 lbs




3.81"



4.33"

PHOTOMETRICS

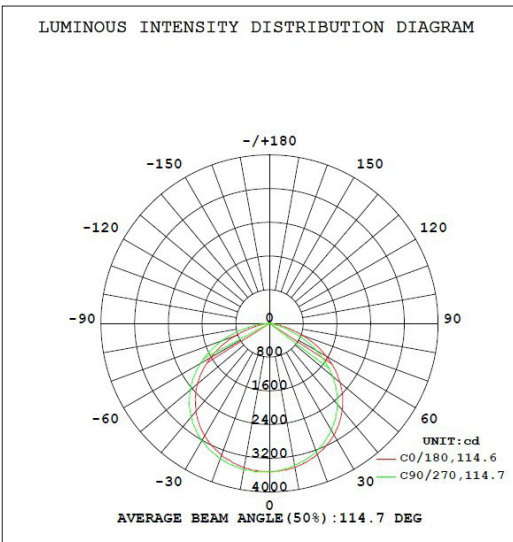

WARNINGS

- Not for use with dimmers.
- Not rated for use in enclosed fixtures.