

**DESCRIPTION**

Featuring a durable thermoplastic housing, use these red LED exit signs to mark emergency exits.

**FEATURES**

- Single or double face sign with 6-inch red letters
- Emergency operation for up to 90 minutes; recharges in 24 hours
- Built in 1.2V Ni-MH battery
- Has manual test switch and charge indicator
- Universal J-box mounting pattern for easy installation and is suitable for end mounting

**LISTINGS**

- UL rated for damp locations
- UL 94V-0 flame rating
- RoHS

**PERFORMANCE**

- Emergency Operation: 90 minutes
- Charging Time: 24 Hours

**THERMAL**

- 32°F to 104°F (0°C to 40°C) operating temperature

**ELECTRICAL**

- Input Voltage: 120V/277V
- Input Current: 0.023A
- Input Wattage: 1.6W

**BATTERY**

- Type: Ni-MH
- Voltage: 1.2V
- Milliamp Hours: 1000 mAh

**INSTALLATION**

- Designed for wall or ceiling mounting (hardware included); see Installation Instruction PDF for more information

**CONSTRUCTION**

- Injection-molded thermoplastic ABS housing with white finish

**WARRANTY**

- 5 year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

project name	type
catalog number	
comments	voltage
approved by	date




**APPLICATIONS**

- Hallways
- Stairwells
- Lobbies

## PERFORMANCE SUMMARY

Item #	Input Wattage	Input Current	Voltage	Battery Type	Emergency Operation	Recharge Time	Testing	Letter Color
PLTS-50289	1.6W	0.023A	120V/ 277V	Ni-MH	90 Minutes	24 Hours	Manual	Red

## DIMENSIONS

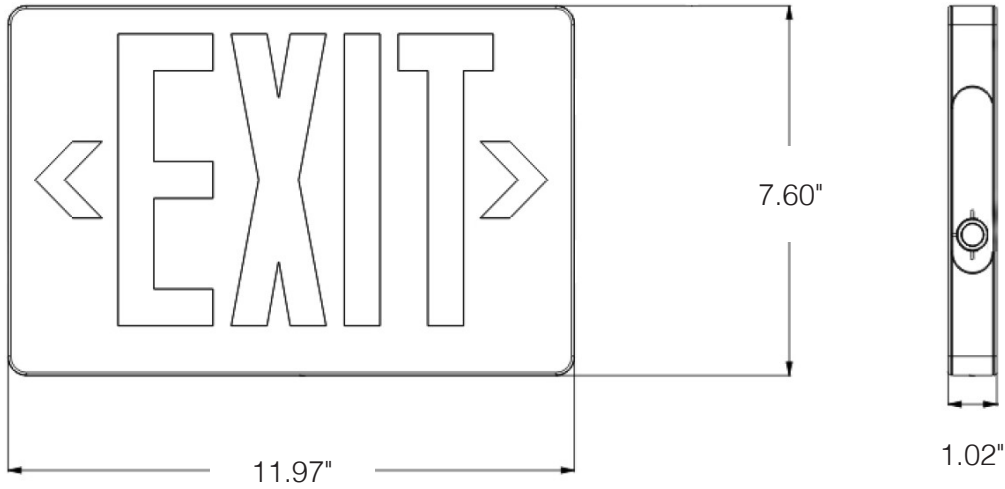

### DIMENSIONS

Height: 7.60"

Width: 11.97"

Depth: 1.02"

Weight: 1.61 lbs.

## WARNINGS

- Not for use outdoors.