

**DESCRIPTION**

Featuring selectable wattage and color temperatures that allow you to adjust the light output as needed, this LED wall pack has a rotatable LED panel that allows you to aim the light exactly where needed.

**FEATURES**

- Delivers up to 155 LPW depending on the wattage selected; see Selectable Table for full breakdown
- Optics rotate 350 degrees
- Replaces 70-150W metal halide fixtures
- Wattage and color temperature are adjusted via switches inside of fixture; see installation instructions for more information.

**LISTINGS**

- IP65 Rated
- UL Listed for wet locations
- DesignLights Consortium® 5.1 Premium - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN - PLTS-11954: PLTSN511312

**PERFORMANCE**

- CRI: 70+
- CCT: 3000K, 4000K, and 5000K
- Rated Lifetime L70: 50,000 hours
- Seoul Semiconductor LEDs

**ELECTRICAL**

- THD: ≤ 20%
- Power Factor: ≥ 0.9
- Input Voltage: 120-277V

**THERMAL**

- -22°F to 113°F (-30°C to 45°C) operating temperature

**CONSTRUCTION**

- Aluminum alloy housing with white finish
- Non-yellowing polycarbonate lens

**WARRANTY**

- 5 year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



**APPLICATIONS**

- Security Lighting
- Entrance Lighting
- Landscape Lighting
- Up or Down Lighting
- Wall Washing

# PERFORMANCE SUMMARY


Item #	Watts*	CRI	CCT*	Lens	Voltage	Replaces	DLC Level	DLC #
PLTS-11954	13/19/25	70+	3000K/4000K/5000K	Polycarbonate	120-277V	MH70-150	5.1 Premium	PLTS-11954: PLTSN511312

\*See Selectable Table for full breakdown

## SELECTABLE TABLE

Wattage	CCT	Lumen	Efficacy
13	3000K	1949	150
	4000K	2023	155
	5000K	1947	150
19	3000K	2793	147
	4000K	2933	154
	5000K	2775	146
25	3000K	3125	125
	4000K	3625	145
	5000K	3375	135

## DIMENSIONS

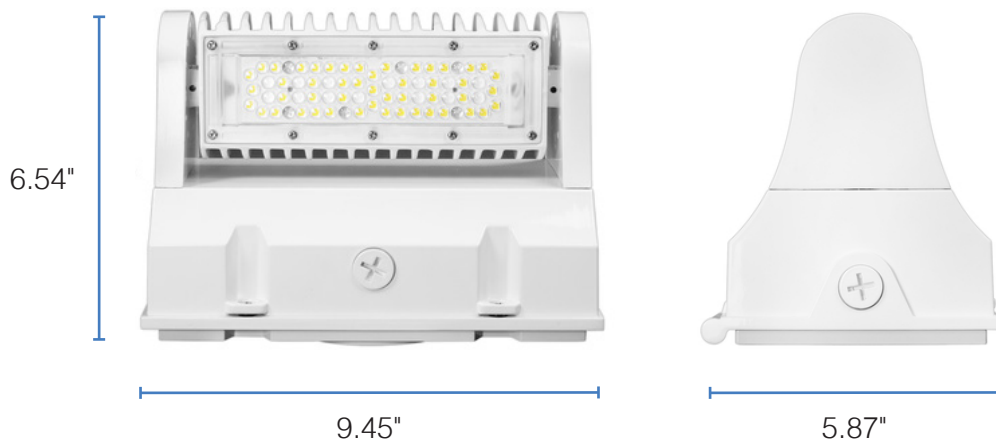

### DIMENSIONS

Length: 6.54"  
 Height: 9.45"  
 Width: 5.87"  
 Weight: 3.6 lbs.

## PHOTOMETRICS

