

DESCRIPTION

Featuring selectable wattage and color temperatures that allow you to adjust the light output as needed, this LED wall pack has two rotatable LED panels that allow you to aim the light exactly where needed.

FEATURES

- Delivers up to 161 LPW depending on the wattage selected; see Selectable Table for full breakdown
- Optics rotate 350 degrees
- Replaces 175-250W metal halide fixtures
- Wattage and color temperature are adjusted via switches inside of fixture; see installation instructions for more information.

LISTINGS

- IP65 Rated
- UL Listed for wet locations
- DesignLights Consortium® 5.1 Premium - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN - PLTSN521112

PERFORMANCE

- CRI: 70+
- CCT: 3000K, 4000K, and 5000K
- Rated Lifetime L70: 50,000 hours
- Seoul Semiconductor LEDs

ELECTRICAL

- THD: ≤ 20%
- Power Factor: ≥ 0.9
- Input Voltage: 120-277V

THERMAL

- -22°F to 113°F (-30°C to 45°C) operating temperature

CONSTRUCTION

- Aluminum alloy housing with bronze finish
- Non-yellowing polycarbonate lens

WARRANTY

- 5 year limited warranty; see pltsolutions.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



APPLICATIONS

- Security Lighting
- Entrance Lighting
- Landscape Lighting
- Up or Down Lighting
- Wall Washing

PERFORMANCE SUMMARY


Item #	Watts*	CRI	CCT*	Lens	Voltage	Replaces	DLC Level	DLC #
PLTS-11955	30/45/60	70+	3000K/4000K/5000K	Polycarbonate	120-277V	MH175-250	5.1 Premium	PLTSN521112

*See Selectable Table for full breakdown

SELECTABLE TABLE

Wattage	CCT	Lumen	Efficacy
30	3000K	4563	152
	4000K	4845	162
	5000K	4724	157
45	3000K	6409	142
	4000K	6985	155
	5000K	6751	150
60	3000K	7200	120
	4000K	8580	143
	5000K	7800	130

DIMENSIONS

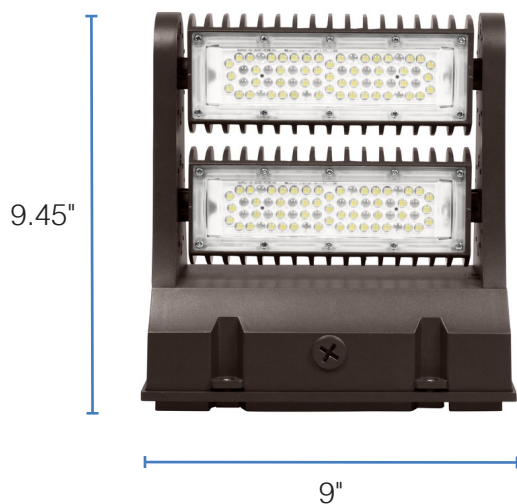

DIMENSIONS

Length: 9"
 Height: 9.45"
 Width: 5.87"
 Weight: 5.5 lbs.

PHOTOMETRICS

Luminous Intensity Distribution Curve

