



LED HID RETROFIT




PRODUCT FEATURES

- Magnesium Alloy Housing
- Black Finish
- IP51 Rating
- 100-277 Voltage Rating, PF > 0.9
- CRI > 70
- 270° Rotatable Mogul Base (E39)
- Type III Light Distribution
- Clear Plastic Lens
- 50,000 Hour Lifetime Rating
- 3-Year Limited Warranty
- UL / cUL Certified, Damp Location Rated
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)

PRODUCT SPECIFICATIONS

Stock Code	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) (L x W x H)	EFFICIENCY (Lm/W)
PLTS-11966	115	13,600	5000	11.69 x 5.43 x 3.43	118

PHOTOMETRY

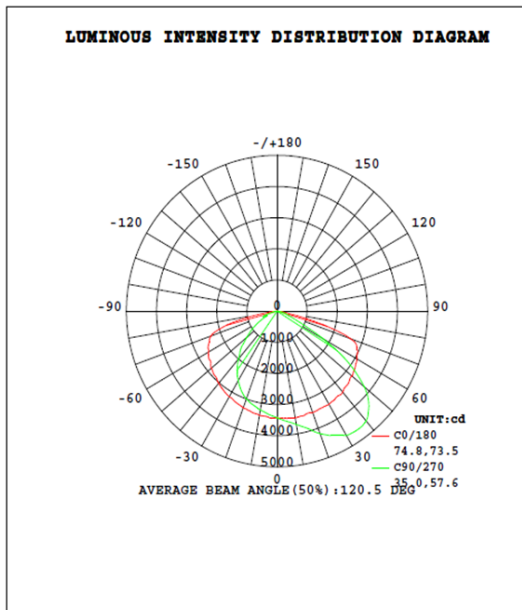

Flux out:6576 lm

Height	Havg,Emax	Angle:91.38deg	Diameter
1m	1952,35451x		204.89cm
2m	488.0,886.21x		409.78cm
3m	216.9,393.91x		614.67cm
4m	122.0,221.61x		819.56cm
5m	78.08,141.81x		1024.46cm
6m	54.22,98.471x		1229.35cm
7m	39.84,72.351x		1434.24cm
8m	30.50,55.391x		1639.13cm
9m	24.10,43.771x		1844.02cm
10m	19.52,35.451x		2048.91cm

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

DIAGRAM

