

Reduce your energy costs by replacing existing DC BA15s single contact base halogen bulbs with these more efficient LED BA15s single contact base bulbs.

## FEATURES

- Impressive 133 LPW
- Replaces a 20W halogen bulb
- Can be safely handled with bare hands
- Single contact BA15s base
- ANSI code 1156

## LISTINGS

- For indoor, dry locations
- Rated for use in enclosed fixtures
- FCC
- RoHS

## PERFORMANCE

- CRI: >80
- CCT: 3000K
- LED L70 Life Hours: ≥100,000 hours

## THERMAL

- -31°F to 113°F (-35°C to 131°C) operating temperature

## ELECTRICAL

- Input Voltage: 12-30V DC

## WARRANTY

- 1 year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



## APPLICATIONS


- Tail Lights
- Signal Lights

PERFORMANCE	Power Consumption	3 Watt
	Lumens	400
	Efficacy (LPW)	133
	CRI	>80
	Beam Angle	300°
	CCT	3000K
	LED L70 Life Hours	≥100,000
ELECTRICAL	Input Voltage	12-30V DC
	Shape	T3
CONSTRUCTION	Base	BA15s Single Contact
	Housing	Plastic
	Finish	Clear
	Certifications	FCC
LISTINGS	Material Usage	RoHS – No mercury or lead
	Environment	Indoor/Dry Locations; Enclosed Fixture Rated

## PERFORMANCE SUMMARY

Item #	Shape	Lumens	Wattage	LPW	Voltage	Replaces	CCT	CRI	Finish	LED L70 Life Hours	Dimmable	ANSI
PLT-10806	T3	400	3W	133	12-30V DC	20W Halogen	3000K	>80	Clear	≥100,000	No	1156

## DIMENSIONS

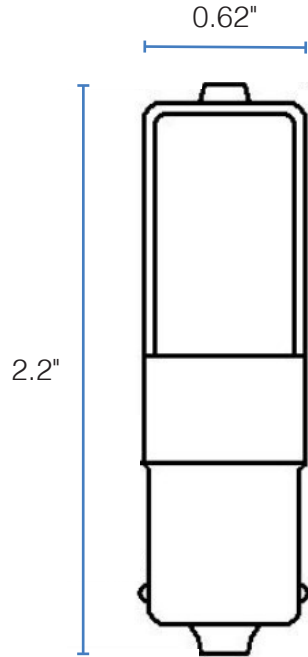

### **DIMENSIONS**

Height: 2.2"

Diameter: 0.62"

Weight: 0.025 lbs

## WARNINGS

- Direct current (DC) use only.
- Not for use with dimmers.