



Commercial Products &amp; Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 97596**97596 – F13DBX/835/ECO4P**


GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse


 High Color Rendering  
Energy Savings
**GENERAL CHARACTERISTICS**


Lamp type	Compact Fluorescent - Plug-In
Bulb	T4
Base	G24q-1
Wattage	13
Voltage	91
Rated Life	12000 hrs/20000 hrs
Starting Temperature (MIN)	0 °C (32 °F)
Cathode Resistance	10.500 Ohm
LEED-EB MR Credit	442 picograms Hg per mean lumen hour
Additional Info	Dimmable with appropriate dimming ballast., End of Life Protection (EOL), TCLP compliant
Primary Application	Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse



Bulb



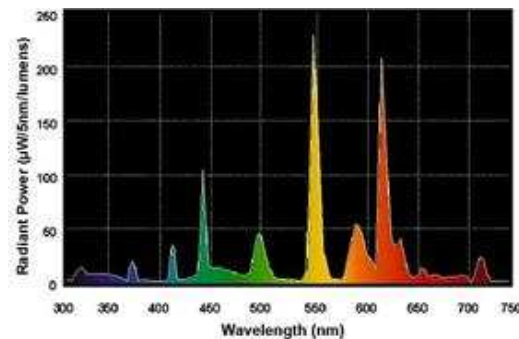
Base

[View Larger](#)**ADDITIONAL RESOURCES**[Catalogs](#)[Testimonials](#)[Disposal Policies & Recycling Information](#)**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	900
Mean Lumens	755
Nominal Initial Lumens per Watt	69
Color Temperature	3500 K
Color Rendering Index (CRI)	82

**ELECTRICAL CHARACTERISTICS**

Current (max)	5.2500 A
Open Circuit Voltage (after preheating) (MAX)	190 V
Open Circuit Voltage Across Starter (MIN)	198 V
Lamp Current	0.175 A
Preheat Voltage (MIN)	4 V
Current Crest Factor (MAX)	1.7
Supply Current	60 Hz

**GRAPHS & CHARTS****Spectral Power Distribution**

Frequency

---

#### DIMENSIONS

Maximum Overall Length (MOL)	4.9000 in (124.4 mm)
Nominal Length	5.000 in (127 mm)
Base Face to Top of Lamp	4.400 in (111.7 mm)

---

#### PRODUCT INFORMATION

Product Code	97596
Description	F13DBX/835/ECO4P
ANSI Code	60901-IEC-2513-2
Standard Package	BUNDLE
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168975964

---

#### COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
<a href="#">80669</a>	C213UNVBE-IP	1	98.0	1.0
<a href="#">71430</a>	GEC213-MVPS-3W	1	96.0	1.0
<a href="#">71428</a>	GEC213-MVPS-BES	1	96.0	1.0
<a href="#">71429</a>	GEC213-MVPS-SE	1	96.0	1.0

---

#### CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

---

#### NOTES

- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
  - Based on 60Hz reference circuit.
  - Fluorescent lamp lumens decline during life
- 

[Return To Top](#)