



Commercial Products & Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > 97619**97619 – F13TBX/827/A/ECO**

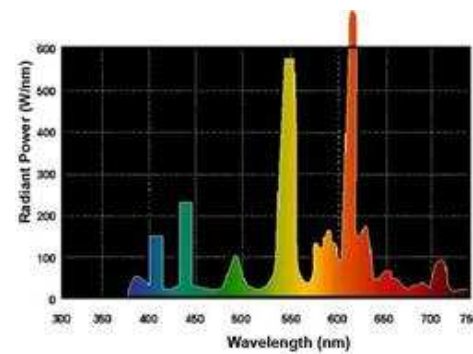
GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse


 High Color Rendering
Energy Savings
[View Larger](#)**GENERAL CHARACTERISTICS**

Lamp type	Compact Fluorescent - Plug-In
Bulb	T4
Base	GX24q-1
Wattage	13
Voltage	120/91
Rated Life	12000 hrs
Cathode Resistance	10.500 Ohm
LEED-EB MR Credit	442 picograms Hg per mean lumen hour
Rated Life (rapid start) @ Time	20000 h @ 12 h
Additional Info	Dimmable with appropriate dimming ballast., End of Life Protection (EOL), TCLP compliant
Primary Application	Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

ADDITIONAL RESOURCES[Catalogs](#)[Testimonials](#)[Sell Sheets](#)

- [Fast Warming](#)

[Disposal Policies & Recycling Information](#)**GRAPHS & CHARTS****Spectral Power Distribution****PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	900
Mean Lumens	755
Nominal Initial Lumens per Watt	69
Color Temperature	2700 K
Color Rendering Index (CRI)	82

ELECTRICAL CHARACTERISTICS

Current (max)	5.2500 A
Open Circuit Voltage (after preheating) (MAX)	190 V
Open Circuit Voltage Across Starter (MIN)	198 V
Lamp Current	0.175 A
Preheat Voltage (MIN)	4 V
Current Crest Factor (MAX)	1.7
Supply Current	60 Hz

Frequency

DIMENSIONS

Maximum Overall Length (MOL)	4.3000 in (109.2 mm)
Nominal Length	4.200 in (106.6 mm)
Base Face to Top of Lamp	3.700 in (93.9 mm)

PRODUCT INFORMATION

Product Code	97619
Description	F13TBX/827/A/ECO
Standard Package	Case
Standard Package GTIN	10043168976197
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168976190

CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

NOTES

- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
 - Amalgam product experience stable brightness over a wider temperature range and in various operating positions.
 - Based on 60Hz reference circuit.
 - Fluorescent lamp lumens decline during life
-

[Return To Top](#)

Home | Products | EliteNet | Education/Resources | Lighting Applications | Where to Buy | FAQs | Contact Us | Site Map
 Products for Your Home | Press Room | Corporate | Investor Information | Privacy Policy | Accessibility Statement | Terms of Use

Copyright General Electric Company 1997-2009