

## DESCRIPTION

Reduce energy and maintenance costs by retrofitting existing recessed cans with this color selectable 4 inch LED downlight.

## FEATURES

- Energy efficient replacement for 65W incandescent downlights
- Medium (E26) base adapter
- Can be used in both IC and Non-IC rated housings
- Dimmable; see dimmer compatibility sheet for full list of compatible dimmers
- Color temperature can be adjusted via switch on top of fixture; see installation instructions for more information

## LISTINGS

- UL Listed for wet locations
- IC Rated
- FCC Part 15
- RoHS
- Energy Star Part Number PLTLFE11C

## PERFORMANCE

- CRI: 80
- CCT: 2700K, 3000K, 3500K, 4000K, and 5000K
- Rated Lifetime L70: 50,000 hours

## ELECTRICAL

- THD: 16.30%
- Power Factor: 0.7
- Input Voltage: 120V

## CONSTRUCTION

- Aluminum body with plastic trim, both with white finish
- Frosted plastic lens

## WARRANTY

- 5-year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



## APPLICATIONS

- Offices
- Lobbies
- Conference Rooms
- Hotels
- Retail Stores

<b>PERFORMANCE</b>	Power Consumption	10 Watt
	Lumens	800
	Efficacy (LPW)	80
	CRI	80
	CCT	2700K, 3000K, 3500K, 4000K, 5000K
<b>ELECTRICAL</b>	Life (L70)	50,000
	Power Factor	0.7
	THD	16.30%
<b>CONSTRUCTION</b>	Input Voltage	120V
	Base	E26
	Finish	White
<b>LISTINGS</b>	Lens	Frosted
	Certifications	UL Listed; FCC; Energy Star
	Material Usage	RoHS – No mercury or lead
	Environment	IC Rated; Wet Location Rated

# PERFORMANCE SUMMARY

Item #	UPC	Size	Lumens	Wattage	LPW	Voltage	Replaces	CCT	CRI	Life/Hours	Dimmable
PLT-11935	842821112438	4"	800	10	80	120V	65W Incan.	2700K / 3000K / 3500K / 4000K / 5000K	80	50000	Yes

## DIMENSIONS



### DIMENSIONS


Outside Diameter: 5.35"

Inside diameter: 2.76"

Height: 2.86"

Weight: 0.29 lbs.

## PHOTOMETRICS

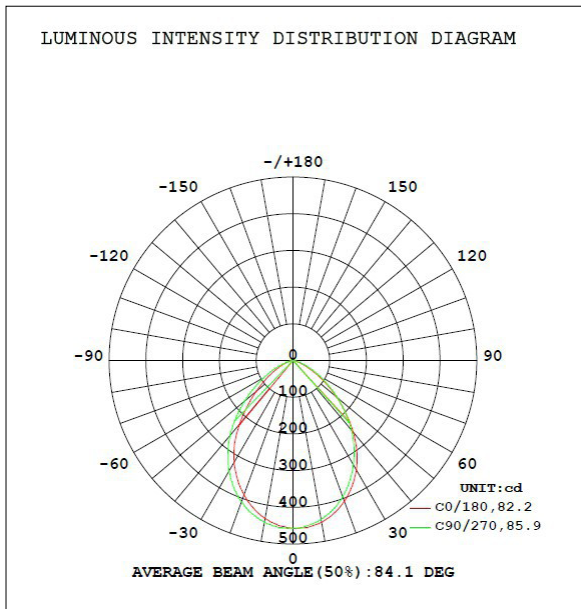

## WARNINGS

- Only use this LED downlight with the dimmers listed in the compatibility list. Using this downlight with incompatible dimmers may cause performance issues including humming, buzzing, flickering, and poor dimming performance.
- Not intended for use with emergency exits.