

LED CORN LAMP

DESCRIPTION

Reduce energy and maintenance costs by replacing 250W metal halide bulbs with these more efficient 60W LED corn bulbs.

FEATURES

- Delivers 155 LPW for highly efficient performance
- Universal burn position
- Mogul E39 base
- Ballasts, capacitors, and starters must be removed (bypassed) from fixture during installation; see installation instructions for more information

LISTINGS

- UL rated for damp locations
- Rated for use in enclosed fixtures
- FCC Part 15
- IP64
- CE
- RoHS
- DesignLights Consortium® 5.1 Standard meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN - PLTBG523

PERFORMANCE

• CRI: >80

• CCT: 5000K

LED L70 Life Hours: ≥100,000 hours

Philips Lumileds LEDs

THERMAL

-40°F to 113°F or (-40°C to 45°C) operating temperature

ELECTRICAL

• THD: <20%

Power Factor: >0.9

Input Voltage: 120-277V

Surge Protection: 4kV

project name	type
catalog number	
comments	voltage
approved by	date











WARRANTY

 5 year limited warranty; see pltsolutions.com for warranty details

APPLICATIONS

- Schools
- Offices
- Factories
- Conference Rooms
- Hotels
- Hospitals


	Power Consumption	60 Watt			
	Bare Lamp Lumens	9300			
	Bare Lamp Efficacy (LPW)	155			
	Fixture Lumens*	7516			
PERFORMANCE	Fixture Efficacy (LPW)*	132			
PERFURIVIANCE	CRI	>80			
	сст	5000K			
	LED L70 Life Hours	≥100,000			
	Beam Angle	360 Degree			
	Burn Position	Universal			
	Power Factor	<20%			
ELECTRICAL	THD	>0.9			
	Input Voltage	120-277V			
CONSTRUCTION	Operating Temperature	-40°F to 113°F or (-40°C to 45°C)			
CONSTRUCTION	Base	E39			
	Certifications	UL Listed; FCC; CE; IP64; DLC			
LISTINGS	Material Usage	RoHS - No mercury or lead			
	Environment	Enclosed Fixture Rated; Damp Location Rated			

*Fixture lumens and efficacy based on testing in DLC approved fixture.

PERFORMANCE SUMMARY

Item #	Watts	Bare Lamp Lumens	Bare Lamp LPW	Voltage	Replaces	ССТ	CRI	Beam	LED L70 Life Hours	DLC Rating	DLC #
PLTS-12066	60	9300	155	120-277V	MH250	5000K	>80	360°	≥100,000	5.1 Standard	PLTBG523

DIMENSIONS

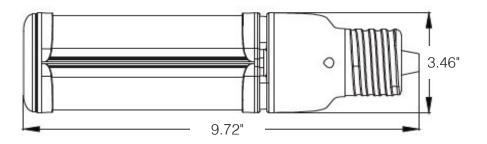



DIMENSIONS

Height: 9.72" Width: 3.46"

Weight: 2.03 lbs

PHOTOMETRICS





WARNINGS

- Not for use with dimmers.
- Minimum lamp compartment dimensions 15.75" long by 15.75" wide