

#### DESCRIPTION

Reduce energy and maintenance costs by replacing 150W metal halide bulbs with these more efficient 36W LED corn bulbs.

### **FEATURES**

- Delivers 155 LPW for highly efficient performance
- Mogul E39 base
- Ballasts, capacitors, and starters must be removed (bypassed) from fixture during installation; see installation instructions for more information

#### LISTINGS

- UL rated for damp locations
- Rated for use in enclosed fixtures
- FCC Part 15
- IP64
- CE
- **RoHS**
- DesignLights Consortium® 5.1 Standard meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN - PLTBG321

#### PERFORMANCE

• CRI: >80 CCT: 3000K

LED L70 Life Hours: ≥100,000 hours

Philips Lumileds LEDs

#### THERMAL

-40°F to 113°F or (-40°C to 45°C) operating temperature

#### ELECTRICAL

• THD: <20%

Power Factor: >0.9 Input Voltage: 120-277V Surge Protection: 2kV

project name	type			
catalog number				
comments	voltage			
approved by	date			



RoHS M Compliant







#### **WARRANTY**

• 5 year limited warranty; see pltsolutions.com for warranty details

#### **APPLICATIONS**

- Warehouses
- Parking Lot Lights
- Security Lighting
  Post Top Lights


	Power Consumption	36 Watt			
	Bare Lamp Lumens	5580			
	Bare Lamp Efficacy (LPW)	155			
	Fixture Lumens*	4143			
PERFORMANCE	Fixture Efficacy (LPW)*	122			
	CRI	>80			
	сст	3000K			
	LED L70 Life Hours	≥100,000			
	Beam Angle	360 Degree			
	Power Factor	<20%			
ELECTRICAL	THD	>0.9			
	Input Voltage	120-277V			
CONSTRUCTION	Operating Temperature	-40°F to 113°F or (-40°C to 45°C)			
CONSTRUCTION	Base	E39			
	Certifications	UL Listed; FCC; CE; IP64; DLC			
LISTINGS	Material Usage	RoHS - No mercury or lead			
	Environment	Enclosed Fixture Rated; Damp Location Rated			

\*Fixture lumens and efficacy based on testing in DLC approved fixture

#### PERFORMANCE SUMMARY

Item #	Watts	Base Lamp Lumens	Base Lamp LPW	Voltage	Replaces	ССТ	CRI	Beam	LED L70 Life Hours	DLC Level	DLC #
PLTS-12050	36	5580	155	120-277V	MH150	3000K	>80	360°	≥100,000	5.1 Standard	PLTBG321

# DIMENSIONS

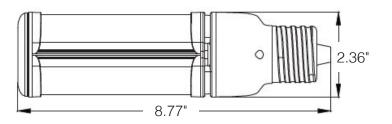

## **DIMENSIONS**

Height: 8.77" Width: 2.36" Weight: 0.84 lbs

# **PHOTOMETRICS**

