



**35W**  
REPLACEMENT

**90+**  
CRI

**7W**  
Watts

**GU5.3**

**12V**  
Voltage

**DAMP LOCATION**

**Dimmable**

High quality of light and color rendering (90+ CRI, 50+ R9),  
with low flicker, flicker <30%,  
Smooth dimming. Dimming lower than 10%.





## ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.002	480LM	7W	2700K	24°	>90	>0.9	1825cd
SE-350.074	470LM	7W	3000K	24°	>90	>0.9	1225cd

## MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.002	1.97in X 1.92in	1.41oz	-20°C - 40°C	12pcs	48pcs
SE-350.074	1.97in X 1.92in	1.41oz	-20°C - 40°C	12pcs	48pcs



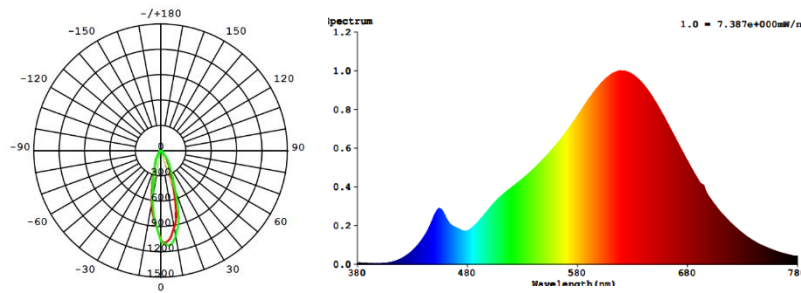

## RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES						
R1=95	R2=99	R3=94	R4=93	R5=95	R6=94	R7=87
R8=75	R9=50	R10=99	R11=97	R12=84	R13=98	R14=98

