

# Features & Specifications

**PLT**  
&

## LED WRAPAROUND

**INTENDED USE** – These surface mounted PLT LED wraparound fixtures deliver light downwards for directional illumination. It consumes less power and last longer than their fluorescent equivalents, saving money on energy costs. Wraparound LED light fixtures are designed to use single-ended direct wire LED tubes that are included. The PLT wraparound fixtures can be used in a variety of locations around your home or business.

**CONSTRUCTION** – 22 Gauge cold-rolled steel housing with a low-glare prismatic lens. White enamel finish. LED tubes have a glass lens and medium bi-pin bases.

**OPTICS** – Integrated LED strip Provides low-glare light distribution through a frosted lens for an even and consistent light.


**ELECTRICAL** – Hardwire installation. Built in LED driver. Issues commonly associated with ballast driven fixtures such as humming, flickering, and failures are eliminated. 120-277 Volt.

**INSTALLATION** – Refer to included installation instructions

**LISTINGS** – Fixture is IP40 rated; protected from tools and small wires greater than 1 millimeter. Not protected from water. LED T8 tubes are UL and ETL listed to safety standards for damp locations.

**MOUNTING** – Suspended or surface mounting. V-hooks and chains not included.

**WARRANTY** – PLT products that are damaged or defective will be repaired or replaced at PLT's choosing for a period of 3 years. Contact 1-800-624-4488 for more information.

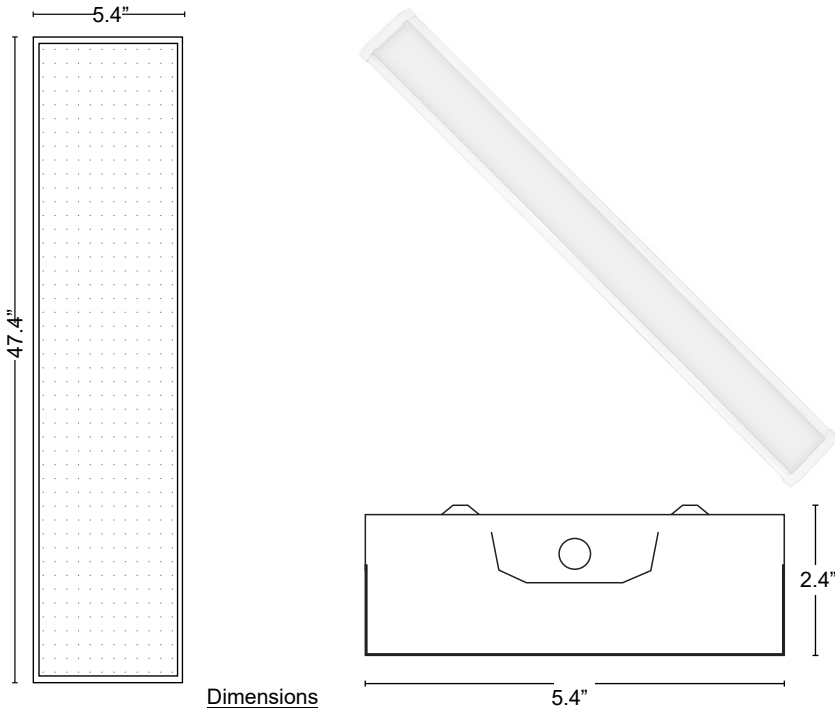

**Dimensions**  
Width: 5.4 in.  
Length: 47.4 in.  
Height: 2.4 in.



- Produces a 5000 Kelvin, daylight white color temperature
- Turns on instantly with no delay or flickering

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-11671	5000	3500	80	40	120	NO	SURFACE	50000	3 Year