



**75W**  
REPLACEMENT

- 90+**  
CRI
- 12W**  
Watts
- E26
- 120V**  
Voltage
- WET LOCATION
- Dimmable

High quality of light and color rendering (90+ CRI, 50+ R9),  
with low flicker, flicker <30%,  
Smooth dimming. Dimming lower than 10%.





## ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-RL6.CE11.1412G	850LM	12W	2700K	40°	>90	>0.9	1635cd

## MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-RL6.CE11.1412G	3.74in X 4.53in	5.82oz	-20°C - 40°C	6pcs	12pcs



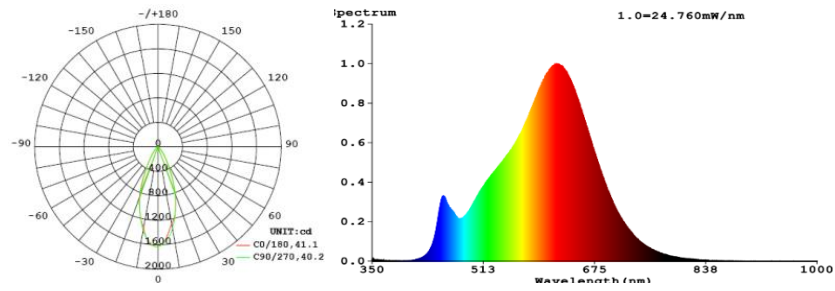


## RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES						
R1=94	R2=99	R3=96	R4=92	R5=94	R6=97	R7=89
R8=79	R9=58	R10=97	R11=94	R12=87	R13=96	R14=99

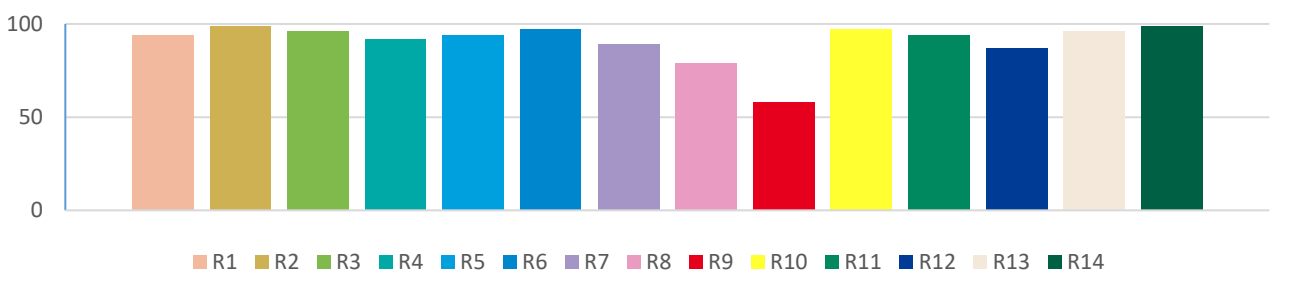

## TM30 GRAPHIC

TM-30 deals with the color rendition of object.

R<sub>f</sub> - a fidelity index that is similar to the commonly used CRI

R<sub>g</sub> - a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

