



40W
REPLACEMENT

90+
CRI

5W
Watts

E26

120V
Voltage

DAMP LOCATION

Dimmable

High quality of light and color rendering (90+ CRI, 50+ R9),
with low flicker, flicker <30%,
Smooth dimming. Dimming lower than 10%.





ELECTRICAL SPECIFICATIONS

| MODEL NO. | LUMEN | POWER | CCT | BEAM | CRI | PF | CBCP |
|------------|-------|-------|-------|------|-----|------|------|
| SE-350.035 | 350LM | 5W | 2700K | 260° | >90 | >0.9 | - |
| SE-350.036 | 350LM | 5W | 3000K | 260° | >90 | >0.9 | - |

MECHANICAL SPECIFICATIONS

| MODEL NO. | MEASURES | WEIGHT | OPERATIONAL TEMPERATURE | INNER BOX QTY | MASTER CARTON QTY |
|------------|-----------------|--------|-------------------------|---------------|-------------------|
| SE-350.035 | 1.93in X 2.95in | 1.62oz | -20°C - 40°C | 12pcs | 48pcs |
| SE-350.036 | 1.93in X 2.95in | 1.62oz | -20°C - 40°C | 12pcs | 48pcs |



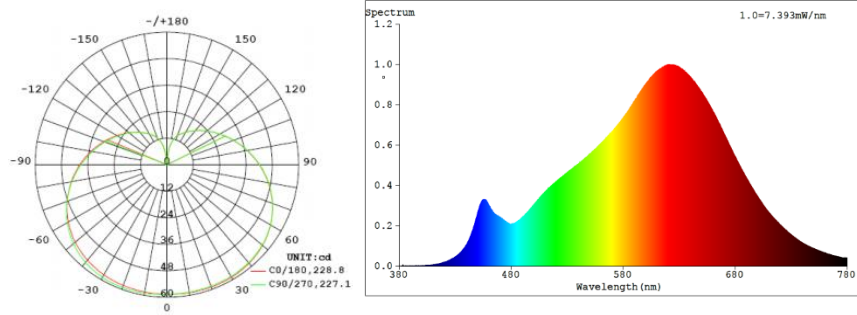


RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES

| | | | | | | |
|-------|-------|--------|--------|--------|--------|---------|
| R1=93 | R2=98 | R3=99 | R4=92 | R5=93 | R6=97 | R7=91 |
| R8=80 | R9=58 | R10=94 | R11=94 | R12=86 | R13=95 | R14=100 |

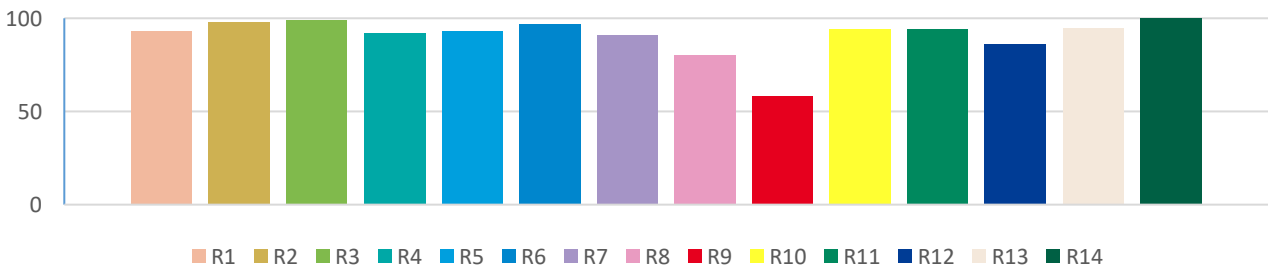

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

