

# 90+ LIGHTING CHANDELIER C12 4.5W



**40W**  
REPLACEMENT

**90+**  
CRI

**4,5W**  
Watts

**E26**

**120V**  
Voltage

**DAMP LOCATION**

**Dimmable**

High quality of light and color rendering (90+ CRI, 50+ R9),  
with low flicker, flicker <30%,

Smooth dimming. Dimming lower than 10%.




## ELECTRICAL SPECIFICATIONS



MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.042	320LM	4.5W	2700K	260°	>90	>0.9	-
<b>SE-350.153</b>	<b>320LM</b>	<b>4.5W</b>	<b>3000K</b>	<b>260°</b>	<b>&gt;90</b>	<b>&gt;0.9</b>	-

## MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.042	1.42in X 3.93in	1.38oz	-20°C - 40°C	12pcs	48pcs
<b>SE-350.153</b>	<b>1.42in X 3.93in</b>	<b>1.38oz</b>	<b>-20°C - 40°C</b>	<b>12pcs</b>	<b>48pcs</b>

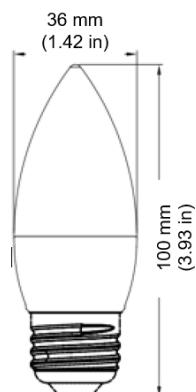

# 90+ LIGHTING CHANDELIER C12 4.5W

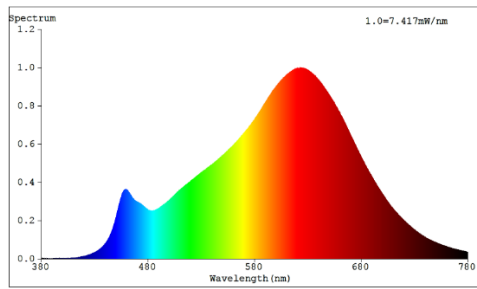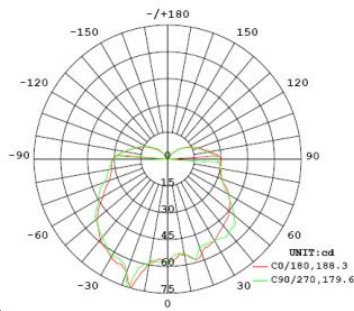


## RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

## R VALUES

R1=94	R2=99	R3=96	R4=92	R5=94	R6=96	R7=89
R8=80	R9=60	R10=98	R11=94	R12=85	R13=96	R14=99

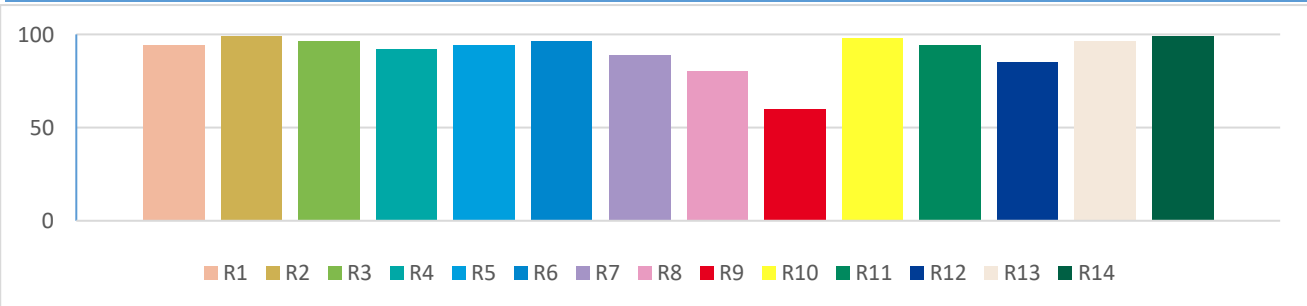

## TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

