



**50W**  
REPLACEMENT

**90+**  
CRI

**6W**  
Watts

**GU10**

**120V**  
Voltage

**DAMP LOCATION**

**Dimmable**

High quality of light and color rendering (90+ CRI, 50+ R9),  
with low flicker, flicker <30%,  
Smooth dimming. Dimming lower than 10%.






## ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.185	500LM	6W	2700K	15°	>90	>0.9	3000cd
SE-350.186	500LM	6W	3000K	15°	>90	>0.9	3000cd

## MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.185	1.97in X 2.11in	0.92oz	-20°C - 40°C	12pcs	48pcs
SE-350.186	1.97in X 2.11in	0.92oz	-20°C - 40°C	12pcs	48pcs



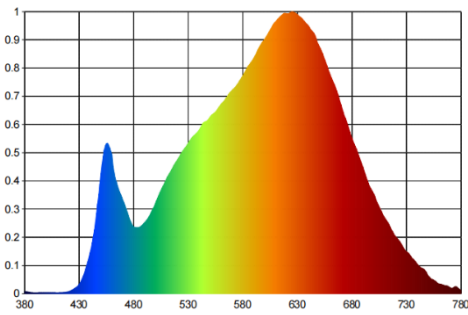


## RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES						
R1=95	R2=98	R3=98	R4=93	R5=94	R6=96	R7=92
R8=85	R9=66	R10=93	R11=93	R12=79	R13=96	R14=99

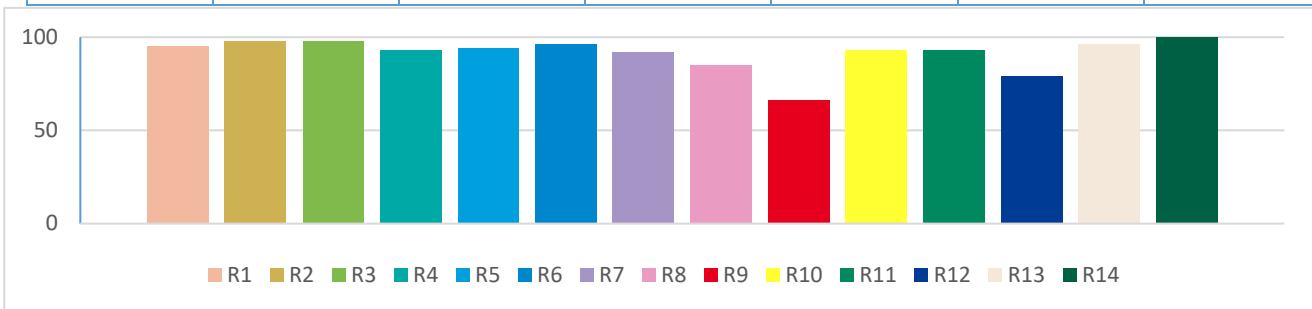

## TM30 GRAPHIC

TM-30 deals with the color rendition of object.

R<sub>f</sub>- a fidelity index that is similar to the commonly used CRI

R<sub>g</sub>- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

TM-30 R <sub>f</sub>	90
TM-30 R <sub>g</sub>	97
CCT (K)	2710
Duv	-0.0026

