



50W
REPLACEMENT

90+
CRI

6W
Watts

GU10

120V
Voltage

DAMP LOCATION

Dimmable

High quality of light and color rendering (90+ CRI, 50+ R9),
with low flicker, flicker <30%,
Smooth dimming. Dimming lower than 10%.






ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.187	500LM	6W	2700K	25°	>90	>0.7	950cd
SE-350.188	500LM	6W	3000K	25°	>90	>0.7	950cd

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.187	1.97in X 2.11in	0.92oz	-20°C - 40°C	12pcs	48pcs
SE-350.188	1.97in X 2.11in	0.92oz	-20°C - 40°C	12pcs	48pcs



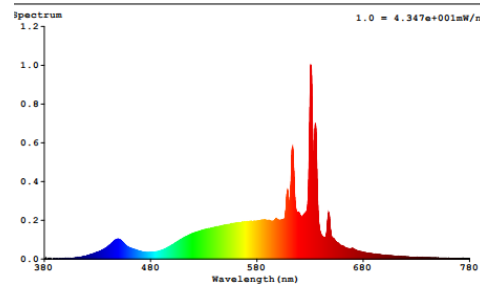


RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES						
R1=98	R2=96	R3=89	R4=94	R5=96	R6=96	R7=94
R8=89	R9=70	R10=85	R11=94	R12=83	R13=97	R14=92

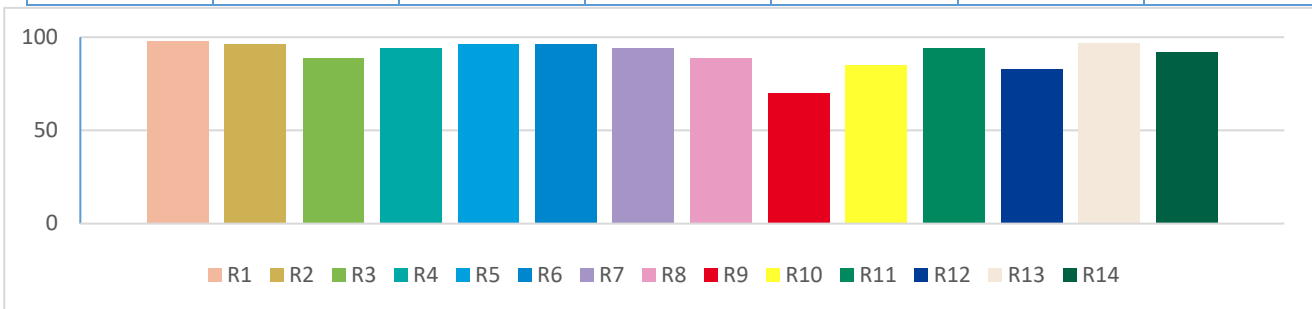

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

TM-30 Rf	92
TM-30 Rg	103
CCT (K)	2956
Duv	-0.0014

