

## DESCRIPTION

Reduce your energy costs by replacing standard household bulbs with these more efficient LED A19 bulbs.

## FEATURES

- Standard household medium (E26) base
- Replaces 40W to 100W incandescent bulbs
- Frosted lens helps reduce glare

## LISTINGS

- ETL Listed for damp locations
- FCC
- RoHS
- Rated for use in enclosed fixtures

## PERFORMANCE

- CRI: 80
- CCT: 27000K, 3000K, 4000K, & 5000K
- LED L70 Life Hours: 25,000 hours

## ELECTRICAL

- Power Factor: > 0.5
- Input Voltage: 120V

## THERMAL

- 14°F to 104°F (-10°C to 40°C) operating temperature

## WARRANTY

- 1 year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



## APPLICATIONS

- Table and Floor Lamps
- Ceiling Fans
- Pendants

<b>PERFORMANCE</b>	Power Consumption	6, 9, 11, & 14W
	Lumens	450, 820, 1050, 1500
	Efficacy (LPW)	75, 90, 95, 107
	CRI	80
	Beam Angle	180°
	CCT	2700K, 3000K, 4000K, 5000K
	LED L70 Life Hours	25,000
<b>ELECTRICAL</b>	Input Voltage	120V
	Power Factor	>0.5
	Operating Temperature	14°F to 104°F (-10°C to 40°C)
<b>CONSTRUCTION</b>	Shape	A19
	Base	E26
	Finish	Frosted
<b>LISTINGS</b>	Certifications	ETL Listed; FCC
	Material Usage	RoHS – No mercury or lead
	Environment	Damp Locations; Enclosed Fixture Rated

## PERFORMANCE SUMMARY

Item #	Shape	Lumens	Wattage	LPW	Voltage	Replaces	CCT	CRI	Finish	LED L70 Life Hours	Dimmable
PLT-12514	A19	450	6	75	120V	40W Incan.	3000K	80	Frosted	25,000	No
PLT-12515	A19	450	6	75	120V	40W Incan.	4000K	80	Frosted	25,000	No
PLT-12516	A19	450	6	75	120V	40W Incan.	5000K	80	Frosted	25,000	No
PLT-12517	A19	820	9	90	120V	60W Incan.	3000K	80	Frosted	25,000	No
PLT-12518	A19	820	9	90	120V	60W Incan.	4000K	80	Frosted	25,000	No
PLT-12519	A19	820	9	90	120V	60W Incan.	5000K	80	Frosted	25,000	No
PLT-12520	A19	1050	11	95	120V	75W Incan.	3000K	80	Frosted	25,000	No
PLT-12521	A19	1050	11	95	120V	75W Incan.	4000K	80	Frosted	25,000	No
PLT-12522	A19	1050	11	95	120V	75W Incan.	5000K	80	Frosted	25,000	No
PLT-12523	A19	1500	14	107	120V	100W Incan.	3000K	80	Frosted	25,000	No
PLT-12524	A19	1500	14	107	120V	100W Incan.	4000K	80	Frosted	25,000	No
PLT-12525	A19	1500	14	107	120V	100W Incan.	5000K	80	Frosted	25,000	No
PLTS-12573	A19	450	6	75	120V	40W Incan.	2700K	80	Frosted	25,000	No
PLTS-12574	A19	820	9	90	120V	60W Incan.	2700K	80	Frosted	25,000	No
PLTS-12575	A19	1050	11	95	120V	75W Incan.	2700K	80	Frosted	25,000	No
PLTS-12576	A19	1500	14	107	120V	100W Incan.	2700K	80	Frosted	25,000	No

## DIMENSIONS

### 5W - 9W DIMENSIONS

Height: 4.10"

Diameter: 2.36"

Weight: 0.054 lbs



### 11W DIMENSIONS

Height: 4.25"

Diameter: 2.36"

Weight: 0.065 lbs




### 14W DIMENSIONS

Height: 4.61"

Diameter: 2.36"

Weight: 0.081 lbs

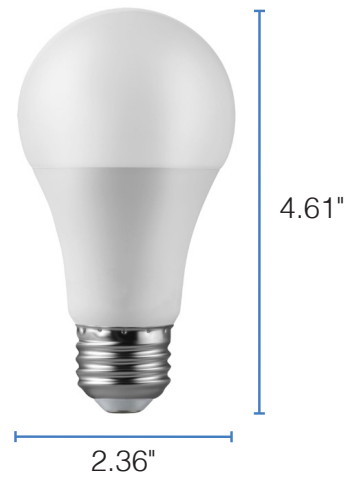

## WARNINGS

- Not for use with dimmers.