

DESCRIPTION

Featuring two rotatable LED panels that allow you to aim the light exactly where needed, this LED rotatable wall pack efficiently replaces existing 250W metal halide fixtures.

FEATURES

- Delivers 142 LPW for superior performance over older metal halide wall packs
- Optics rotate 350 degrees in each direction
- 0-10V dimming; see Compatible Dimmers section for full list of compatible dimmers

LISTINGS

- IP65 Rated
- UL Listed for wet locations
- IK10
- DesignLights Consortium® 5.1 Premium - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN - PLTSN54112

PERFORMANCE

- CRI: >70
- CCT: 5000K
- LED L70 Life Hours: 160,000 hours
- Bridgelux LEDs
- BUG: B4:U0:G0

ELECTRICAL

- THD: ≤ 20%
- Power Factor: ≥ 0.9
- Input Voltage: 120-277V
- Surge Protection: 4kV

THERMAL

- -40°F to 113°F (-40°C to 45°C) operating temperature

CONSTRUCTION

- Die-cast aluminum housing with bronze finish
- Non-yellowing PC lens

WARRANTY

- 5 year limited warranty; see pltsolutions.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



APPLICATIONS

- Security Lighting
- Entrance Lighting
- Landscape Lighting
- Up or Down Lighting
- Wall Washing


PERFORMANCE SUMMARY

Item #	Watts	Lumens	LPW	CRI	CCT	Lens	Dimming	Voltage	Replaces	DLC #	DLC Level
PLT-12489	80	11,335	142	>70	5000K	PC	0-10V	120-277V	MH250	PLTSN54112	5.1 Premium

COMPATIBLE DIMMERS

Brand	Model
Legrand	RH4FBL3PTC
Leviton	IP710-DLZ
Leviton	DS710-10Z
Lutron	NTSTV-DV-WH
Lutron	NFTV-WH
Lutron	DVSTV-WH

DIMENSIONS

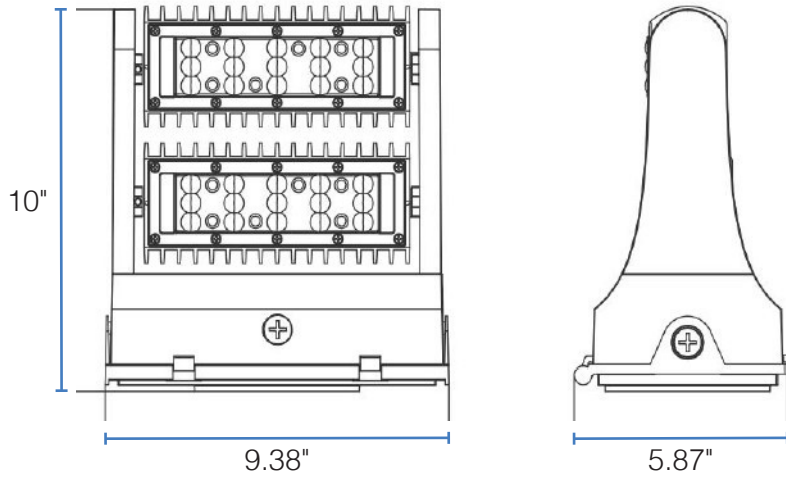

DIMENSIONS

Length: 9.45"
 Height: 5.87"
 Width: 9.38"
 Weight: 5.91 lb

PHOTOMETRICS

Luminous Intensity Distribution Curve

