

# R Series

Recessed Emergency Light



Specifiers reference:



Project: \_\_\_\_\_

Type: \_\_\_\_\_

Model: \_\_\_\_\_

Comments: \_\_\_\_\_

- ◇ (4) 1.0 watt per head.—Flush mount into ceiling
- ◇ Adjustable LED lamp heads provide up to 50-ft center to center spacing with a 3ft path of egress at 12ft mounting height
- ◇ Universal 120-277 voltage.
- ◇ Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- ◇ Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- ◇ 4.8V long-life, maintenance-free, rechargeable nickel metal hydride battery.
- ◇ Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90- minute emergency illumination.
- ◇ Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- ◇ Bar hangers included are compatible with drywall or drop ceiling mount installations.
- ◇ Injection-molded, engineering grade, 5VA flame retardant, impact-resistant, thermoplastic in white or black finish.
- ◇ Five-year warranty on all electronics and housing. Battery pro rated for five years.
- ◇ Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- ◇ UL 924 Listed for damp locations.(10°C – 50°C)
- ◇ Self Diagnostic Optional

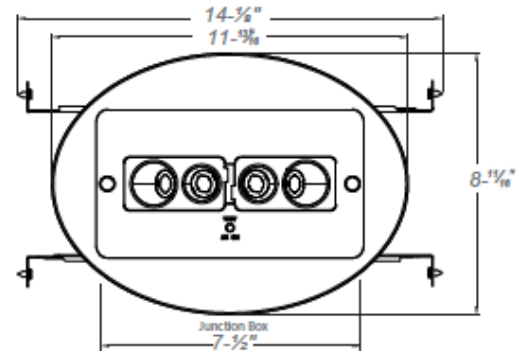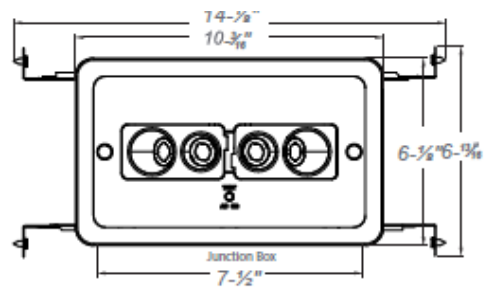

| Model:  | Color | Self Diagnostic |
|---------|-------|-----------------|
| REMW    | White | No              |
| REMB    | Black | No              |
| REMWSDT | White | Yes             |
| REMBSDT | Black | Yes             |

