

**Product family features**

- Can be used in conjunction with the following dimmer(s), switch(es), sensor(s), and accessories: Caséta Wireless, Diva, Luméa, Maestro, Pico wireless, Skylark, Skylark Contour, Sunnata, Vive Maestro Wireless controls, and Vive accessories
- All Lutron wallplates are screwless, seamless, and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in Designer style opening
- Blank inserts available for Gloss (DV-BI-) and Satin Colors (SC-BI-)
- Customize your designer wallplate with engraving; visit [lutron.com/engraving](http://lutron.com/engraving) to get started


**Ganging and derating**

- Designer wallplates use standard ganging
- Requires fins to be removed from dimmers for proper spacing
- May require derating (i.e., reduction of dimmer capacity due to fin removal)




**Available finishes**

Use **BOLD** color code in model number (Example: SC-1-**PL**)

Gloss

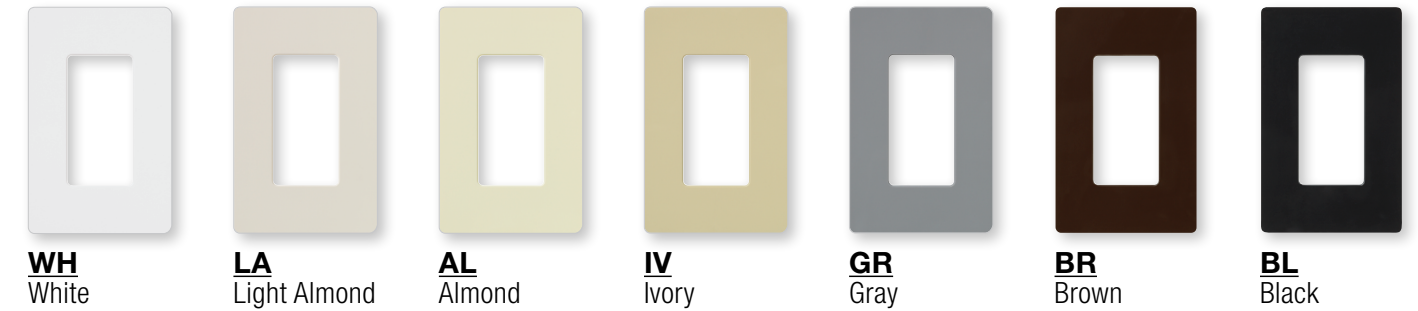


Satin Finishes\*\*

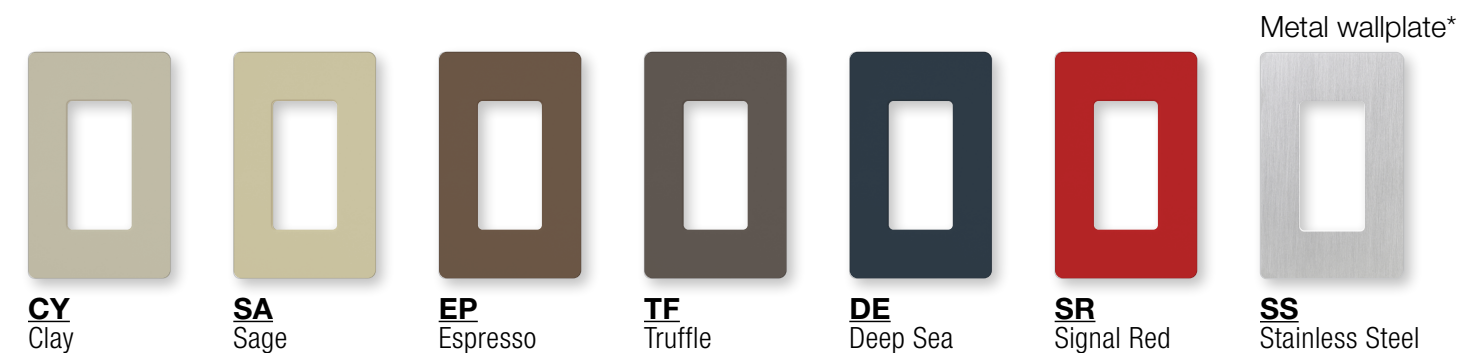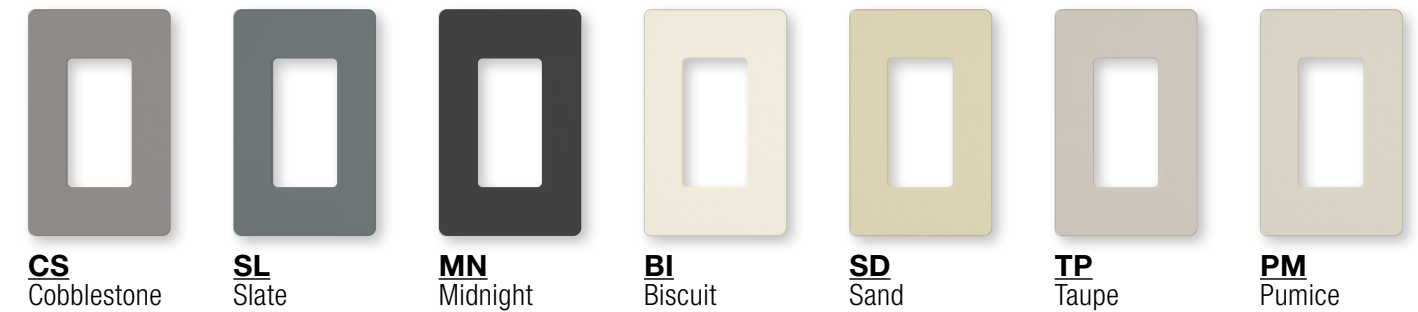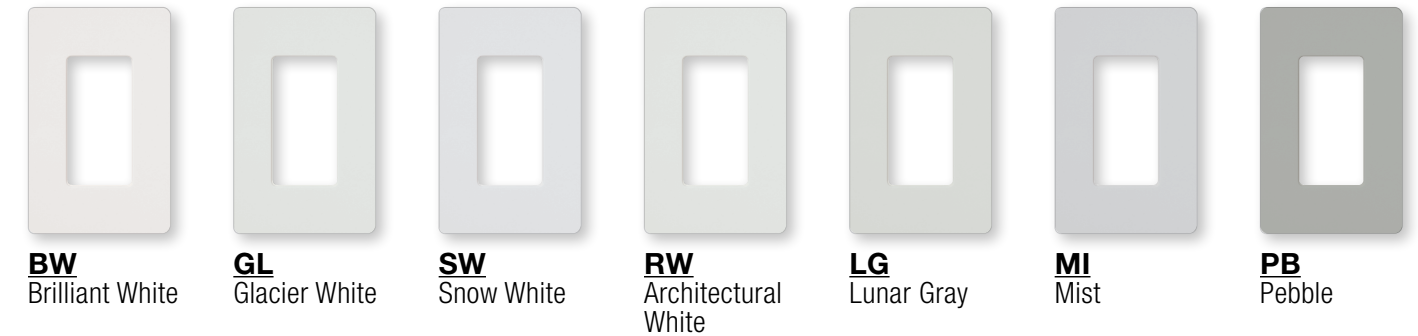


\* Stainless Steel metal wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

\*\* Old satin colors are available while supplies last. To view, visit [lutron.com/claro](http://lutron.com/claro)

Wallplates for Caséta Wireless, Diva, Luméa, Maestro, Maestro Wireless, Pico wireless, Skylark, Skylark Contour, Sunnata, Vive Maestro Wireless controls, and Vive accessories

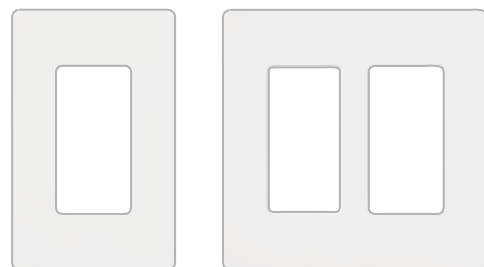

1-gang <sup>*,**</sup>	CW-1- <b>XX</b> <sup>1</sup>
W: 2.94 in (75 mm)	SC-1- <b>XX</b> <sup>2</sup>
2-gang <sup>*,**</sup>	CW-2- <b>XX</b> <sup>1</sup>
W: 4.75 in (121 mm)	SC-2- <b>XX</b> <sup>2</sup>
3-gang <sup>*,**</sup>	CW-3- <b>XX</b> <sup>1</sup>
W: 6.56 in (167 mm)	SC-3- <b>XX</b> <sup>2</sup>
4-gang <sup>*,**</sup>	CW-4- <b>XX</b> <sup>1</sup>
W: 8.37 in (213 mm)	SC-4- <b>XX</b> <sup>2</sup>
5-gang <sup>*</sup>	CW-5- <b>XX</b> <sup>1</sup>
W: 10.18 in (259 mm)	SC-5- <b>XX</b> <sup>2</sup>
6-gang <sup>*</sup>	CW-6- <b>XX</b> <sup>1</sup>
W: 12 in (305 mm)	SC-6- <b>XX</b> <sup>2</sup>



Custom engraving available for all Designer, Traditional, New Architectural, and Architectural style wallplates (except Stainless Steel). For wallplate engraving schedules, go to [lutron.com/engraving](http://lutron.com/engraving).

Cable jacks



- F-style, 75-Ohm coaxial cable
- Wallplate sold separately

Single cable jack	CA-CJ- <b>XX</b> <sup>3</sup>
	SC-CJ- <b>XX</b> <sup>2</sup>

Telephone jacks



- 6-conductor telephone jack, RJ11
- Wallplate sold separately

Single telephone jack	CA-PJ- <b>XX</b> <sup>3</sup>
	SC-PJ- <b>XX</b> <sup>2</sup>

Important note

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox. For more information consult Lutron Application Note #213, Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box, at [lutron.com/applicationnotes](http://lutron.com/applicationnotes).

\* Stainless Steel metal wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.  
 \*\* Bulk packaging available for Gloss colors. For more information, contact Customer Service at 1.888.LUTRON1.

**XX**<sup>1</sup>: Gloss and metal color codes  
**XX**<sup>2</sup>: Available in Snow (SW), Midnight (MN), Taupe (TP), Biscuit (BI), Signal Red (SR), and Mist (MI)  
**XX**<sup>3</sup>: Gloss color codes

6-port frame



- Shipped with six blanks in matching colors
- Connectors sold separately
- Connectors snap in (no tools required)
- Connectors available in White (WH), unless noted

Field customizable 6-port frame

6-port frame	CA-6PF- <b>XX</b> <sup>1</sup>
	SC-6PF- <b>XX</b> <sup>4</sup>

Connectors for 6-port frame



Telephone/network jacks

8-conductor, RJ45 category 5e	CON-1P-C5E- <b>XX</b> <sup>3</sup>
8-conductor, RJ45 category 6	CON-1P-C6- <b>XX</b> <sup>3</sup>

Fiber jacks



MT-RJ feed through	CON-1F-MTRJ-WH
SC simplex	CON-1F-SC-WH
LC non-flush mount	CON-1F-LC-WH
ST-style	CON-1F-ST-WH



Cable jack

F-style, 75-Ohm coaxial cable	CON-1C- <b>XX</b> <sup>3</sup>
-------------------------------	--------------------------------




BNC jack

BNC connector, 50-Ohm	CON-1B-WH
-----------------------	-----------

Connectors only for use with 6-port frame.

**XX**<sup>1</sup>: Gloss color codes  
**XX**<sup>2</sup>: Satin color codes  
**XX**<sup>3</sup>: Available in White (WH) and Black (BL)  
**XX**<sup>4</sup>: Available in Snow (SW), Midnight (MN), Taupe (TP), Biscuit (BI), Signal Red (SR), and Mist (MI)  
 Wallplates not included. Order separately.

Receptacles



- Tamper-resistant receptacles include tamper-resistant shutter mechanism (shutters are white)

Receptacles

15A 125V	CAR-15- <b>XX</b> <sup>1</sup>
	SCR-15- <b>XX</b> <sup>2</sup>
20A 125V	SCR-20- <b>XX</b> <sup>2</sup>

Tamper-resistant receptacles

15A 125V	CARS-15-TR- <b>XX</b> <sup>1</sup>
	SCRS-15-TR- <b>XX</b> <sup>2</sup>
20A 125V	SCRS-20-TR- <b>XX</b> <sup>2</sup>

USB receptacles




- Includes two USB ports
- Ports are rated for a minimum of 10,000 insertions and removals

Tamper-resistant USB receptacles

15A 125V	CAR-15-UBTR- <b>XX</b> <sup>1</sup>
	SCR-15-UBTR- <b>XX</b> <sup>2</sup>

### GFCI Receptacles



- Self-testing technology allows GFCI to automatically check proper operation every 30 seconds
- LEDs indicate status of GFCI protection function
- Press reset button to reset GFCI after circuit interruption

#### Tamper-resistant, self-testing GFCI receptacles

15A 125V, GFCI	CAR-15-GFST- <b>XX</b> <sup>1</sup>
	SCR-15-GFST- <b>XX</b> <sup>2</sup>
20A 125V, GFCI	SCR-20-GFST- <b>XX</b> <sup>2</sup>

### Receptacles for dimming use



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plug for dimming table and floor lamps
- Tamper-resistant shutter mechanism

#### Dual dimming, tamper-resistant receptacles

15A 120/125V	CAR-15-DDTR- <b>XX</b> <sup>1</sup>
	SCR-15-DDTR- <b>XX</b> <sup>2</sup>
20A 120/125V	CAR-20-DDTR- <b>XX</b> <sup>1</sup>
	SCR-20-DDTR- <b>XX</b> <sup>2</sup>

### Receptacles for half dimming use



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plug for dimming table and floor lamps
- Bottom half is a general use receptacle and will fit standard duplex plugs
- Tamper-resistant shutter mechanism

#### Half dimming, tamper-resistant receptacles

15A 120/125V	CAR-15-HDTR- <b>XX</b> <sup>1</sup>
	SCR-15-HDTR- <b>XX</b> <sup>2</sup>
20A 120/125V	CAR-20-HDTR- <b>XX</b> <sup>1</sup>
	SCR-20-HDTR- <b>XX</b> <sup>2</sup>

### Replacement plug for dimming



- This plug required for use with Lutron receptacles for dimming use—plug will also work in standard receptacle
- Easily replaces the existing plugs on lamps

#### Replacement dimming plugs

120/125V	RP-FDU-10- <b>XX</b> <sup>1</sup>
----------	-----------------------------------

UL/CSA/NOM regulatory approvals.

#### Important notes

- Receptacles and plugs for dimming use are UL Listed for use with all Lutron wallbox dimmers included in this catalog.
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used.
- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- For more information on dimming lamps consult Lutron Application Note #109, Guide to Dimming Portable Lamps via Receptacles, at [lutron.com/applicationnotes](http://lutron.com/applicationnotes).

**XX**<sup>1</sup>: Gloss color codes

**XX**<sup>2</sup>: Satin color codes

Wallplates not included. Order separately.

**XX**<sup>1</sup>: Available in White (WH) and Brown (BR)