

**DESCRIPTION**

Featuring selectable wattage and color temperatures that allow you to adjust the light output as needed, these LED mini wall packs are an efficient choice for improving security lighting in outdoor areas.

**FEATURES**

- Delivers up to 134 LPW depending on the wattage selected
- Replaces 100-150W metal halide fixtures
- Integrated photocell for dusk till dawn operation
- Wattage and color temperature are adjusted via dip switch inside of fixture; see installation instructions for more information.

**LISTINGS**

- IP65 Rated
- UL Listed for wet locations
- BUG: B1-U3-G2
- DesignLights Consortium® 5.1 Premium - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN - PLTSN321111W

**PERFORMANCE**

- CRI: 80+
- CCT: 3000K, 4000K, and 5000K
- Rated Lifetime L70: 50,000 hours
- Philips Lumileds SMD LEDs

**ELECTRICAL**

- THD: ≤ 20%
- Power Factor: ≥ 0.9
- Input Voltage: 120-277V

**THERMAL**

- -40°F to 113°F (-40°C to 45°C) operating temperature

**CONSTRUCTION**

- Die-cast aluminum housing with bronze finish
- Polycarbonate lens

**WARRANTY**

- 5 year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



**APPLICATIONS**

- Security Lighting
- Pedestrian Lighting
- Parking Areas

# PERFORMANCE SUMMARY


Item #	Watts*	Lumens*	LPW	CRI	CCT*	Lens	Voltage	Replaces	DLC Level	DLC #
PLTS-11947	20/25/30	2690/3332/4015	134/133/133	80+	3000K/4000K/5000K	Polycarbonate	120-277V	MH100-150	5.1 Premium	PLTSN321111W

\*See Selectable Table for full breakdown

## SELECTABLE TABLE

Wattage	CCT	Lumens	Efficacy
20	3000K	2495	124
	4000K	2671	133
	5000K	2690	134
25	3000K	3091	123
	4000K	3308	132
	5000K	3332	133
30	3000K	3724	124
	4000K	3986	132
	5000K	4015	133

## DIMENSIONS

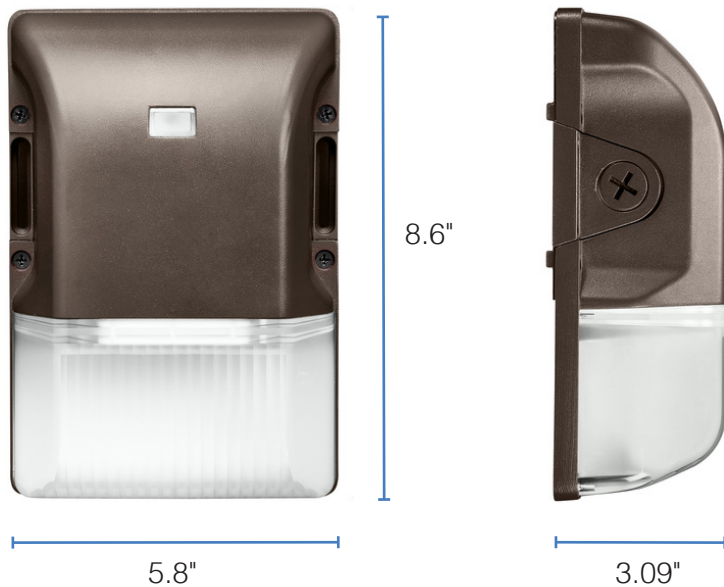

### DIMENSIONS

Length: 5.8"  
 Height: 8.6"  
 Width: 3.09"  
 Weight: 1.3 lbs.