

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, outdoor covered areas, stairways and much more.

### CONSTRUCTION

This contemporary shaped fixture features a matte white acrylic diffuser on the round versions, a polycarbonate diffuser on the square versions, and a robust aluminum housing. Wet location models are equipped with protective gasketing.

### OPTICS

Produces the following lumens at 50,000 hours life (WH finish):

<u>Round versions</u>	<u>Square versions (available in white only)</u>
2700 K: 612 lumens (7")/1768 lumens (13")	4000 K: 1730 lumens (13")
3000 K: 1898 lumens (13")	

### ELECTRICAL

Fixture operates at 120 volts, 60 Hz. 7" Round standard input = 9.3 watts, 70 lumens per watt. 13" Round standard input = 28 watts, 71 lumens per watt. 13" Square standard input = 28 watts, 61 lumens per watt. Works with most standard incandescent dimmers (see list of suggested dimmers on page 2).

### INSTALLATION

All mounting hardware included. Suitable for use within closet storage spaces when installed per NEC requirements.

### LISTINGS

Square and round 13" and round 7" are CSA certified for sale in the USA and Canada. The 13" round size is UL listed for sale in the USA and Canada.


Also certified for Damp Location. For Wet Location the WL OPTION must be added to model number (only available with FMML). ENERGY STAR® certified

Round Versi U.S. Patent No. D691,763. Square Versi Patent Pending.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



#### Square Specifications

13" Height:	2-3/4 (6.98)
13" Width:	13 (33.0)
13" Weight:	4.10 lbs (1.86 kg)

#### Round Specifications

7" Height:	1-3/4 (4.4)
7" Width:	7-1/4 (18.4)
7" Weight:	1.1 lbs (.5 kg)
13" Height:	2-1/2 (6.4)
13" Width:	13 (33.0)
13" Weight:	3.2 lbs (1.45 kg)

All dimensions are inches (centimeters) unless otherwise indicated.

Catalog Number
Notes
Type

Decorative Indoor

# Versi Lite™ LED Flush Mount



HIGH-PERFORMANCE LED



### ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

**Example:** FMML 13 830 WL

FMML	Series	Size	CRI	Color temperature	Fixture finish	Option
FMML	LED Round Versi Lite flush mount	<b>7</b> 7" diameter <b>13</b> 13" diameter	<b>8</b> >80	35 3500 K <sup>1</sup> <b>30</b> 3000 K <sup>2</sup> 27 2700 K	<b>(blank)</b> Textured white <b>DBBT</b> Textured bronze <b>DNA</b> Natural aluminum	<b>WL</b> Wet location

**Notes**  
1 3500K only available in 13 inch size.  
2 3000K only available in 13 inch size. Order FMMLS for 7 inch 3000K.

### ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

**Example:** FMMSQL 13 840

FMMSQL	Series	Size	CRI	Color temperature	Fixture finish
FMMSQL	LED Square Versi Lite flush mount <sup>1</sup>	<b>13</b> 13" Width	<b>8</b> >80	<b>40</b> 4000 K	<b>(blank)</b> Textured white

**Notes**  
1 FMMSQL available in Textured White only.

# FMML Versi Flush Mount

## Suggested Dimmers

The FMML / FMMSQL is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part Number (s)	Manufacturer	Part Number (s)
Leviton	6633P	Lutron	NTELV 300
Leviton	IPL06	Lutron	NLV 600
Leviton	6674P	Synergy	ISD 600/120
Leviton	IPE04	Pass & Seymour	HCL 453PTCCCV6 (13" only)
Lutron	DVELV 300P		

## LIGHTING FACTS

Lithonia Lighting

LED lighting facts<sup>®</sup>

A Program of the U.S. DOE

---

**Light Output (Lumens)** **612**

**Watts** **10.35**

**Lumens per Watt (Efficacy)** **59**

---


**Color Accuracy**

Color Rendering Index (CRI) **85**

---

**Light Color**

Correlated Color Temperature (CCT) **2700 (Warm White)**



2700K   3000K   4500K   6500K

---

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

**Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.**

Registration Number: NJSM-5ECDFF (7/19/2013)  
Model Number: FMML 7 827  
Type: Surface-mounted fixture (other)

Lithonia Lighting

LED lighting facts<sup>®</sup>

A Program of the U.S. DOE

---

**Light Output (Lumens)** **1765**

**Watts** **28**

**Lumens per Watt (Efficacy)** **63.04**

---


**Color Accuracy**

Color Rendering Index (CRI) **83**

---

**Light Color**

Correlated Color Temperature (CCT) **2700 (Warm White)**

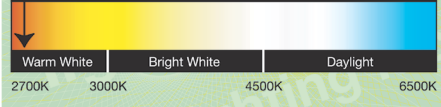

2700K   3000K   4500K   6500K

---

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

**Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.**

Registration Number: NJSM-QZ3KAC (7/14/2015)  
Model Number: FMML 13827  
Type: Luminaire - Decorative

LITHONIA LIGHTING

LED lighting facts<sup>®</sup>

A Program of the U.S. DOE

---

**Light Output (Lumens)** **1898**

**Watts** **28.06**

**Lumens per Watt (Efficacy)** **67.64**

---


**Color Accuracy**

Color Rendering Index (CRI) **82**

---

**Light Color**

Correlated Color Temperature (CCT) **2978 (Warm White)**

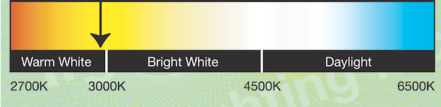

2700K   3000K   4500K   6500K

---

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

**Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.**

Registration Number: NJSM-BTFSWB (6/9/2015)  
Model Number: FMML 13830  
Type: Luminaire - Decorative

## LIGHTING FACTS

LITHONIA LIGHTING

**LED lighting facts®**  
A Program of the U.S. DDE

Light Output (Lumens)	1480
Watts	28
Lumens per Watt (Efficacy)	52.86

Color Accuracy Color Rendering Index (CRI)	83
---	----

**Light Color**  
Correlated Color Temperature (CCT) **2700 (Warm White)**

2700K 3000K Bright White 4500K Daylight 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-NJ04U7 (8/6/2015)  
Model Number: FMML 13 827 DDBT  
Type: Luminaire - Decorative

LITHONIA LIGHTING

**LED lighting facts®**  
A Program of the U.S. DDE

Light Output (Lumens)	1629
Watts	27.91
Lumens per Watt (Efficacy)	58.37

Color Accuracy Color Rendering Index (CRI)	82
---	----

**Light Color**  
Correlated Color Temperature (CCT) **2992 (Warm White)**

2700K 3000K Bright White 4500K Daylight 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-6RHBPJ (8/6/2015)  
Model Number: FMML 13 830 DDBT  
Type: Luminaire - Decorative

LITHONIA LIGHTING

**LED lighting facts®**  
A Program of the U.S. DDE

Light Output (Lumens)	1704
Watts	28.13
Lumens per Watt (Efficacy)	60.58

Color Accuracy Color Rendering Index (CRI)	84
---	----

**Light Color**  
Correlated Color Temperature (CCT) **3911 (Bright White)**

2700K 3000K Bright White 4500K Daylight 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-1DZLS8 (8/6/2015)  
Model Number: FMML 13 840 DDBT  
Type: Luminaire - Decorative

LITHONIA LIGHTING

**LED lighting facts®**  
A Program of the U.S. DDE

Light Output (Lumens)	1567
Watts	28.01
Lumens per Watt (Efficacy)	55.94

Color Accuracy Color Rendering Index (CRI)	83
---	----

**Light Color**  
Correlated Color Temperature (CCT) **2662 (Warm White)**

2700K 3000K Bright White 4500K Daylight 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-WM1D84 (8/6/2015)  
Model Number: FMML 13 827 DNA  
Type: Luminaire - Decorative

LITHONIA LIGHTING

**LED lighting facts®**  
A Program of the U.S. DDE

Light Output (Lumens)	1695
Watts	60.58
Lumens per Watt (Efficacy)	27.98

Color Accuracy Color Rendering Index (CRI)	82
---	----

**Light Color**  
Correlated Color Temperature (CCT) **2992 (Warm White)**

2700K 3000K Bright White 4500K Daylight 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-5FCD44 (8/6/2015)  
Model Number: FMML 13 830 DNA  
Type: Luminaire - Decorative

LITHONIA LIGHTING

**LED lighting facts®**  
A Program of the U.S. DDE

Light Output (Lumens)	1762
Watts	27.78
Lumens per Watt (Efficacy)	63.43

Color Accuracy Color Rendering Index (CRI)	84
---	----

**Light Color**  
Correlated Color Temperature (CCT) **3909 (Bright White)**

2700K 3000K Bright White 4500K Daylight 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-KBNZID (8/6/2015)  
Model Number: FMML 13 840 DNA  
Type: Luminaire - Decorative

## LIGHTING FACTS

LED
LITHONIA LIGHTING

### lighting facts®

A Program of the U.S. DOE

---

**Light Output (Lumens)** 1749

**Watts** 28.03

**Lumens per Watt (Efficacy)** 62.4

---


**Color Accuracy**

Color Rendering Index (CRI) 80

---

**Light Color**

Correlated Color Temperature (CCT) 4000 (Bright White)

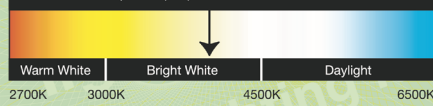

---

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.


Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJSM-ERNBDZ (10/17/2016)  
Model Number: FMMSQL 13 840 XX  
Type: Luminaire - Decorative

## PHOTOMETRICS

Distribution Curve	Distribution Data	Coefficient of Utilization	Illuminance Data at 30" Above Floor for a Single Luminaire
--------------------	-------------------	----------------------------	--

FMMSQL 13 840, 4000K LEDs, input watts: 28, delivered lumens: 1859, LM/W = 66.3, test no. ISF 32375, tested in accordance to IESNA LM-79.

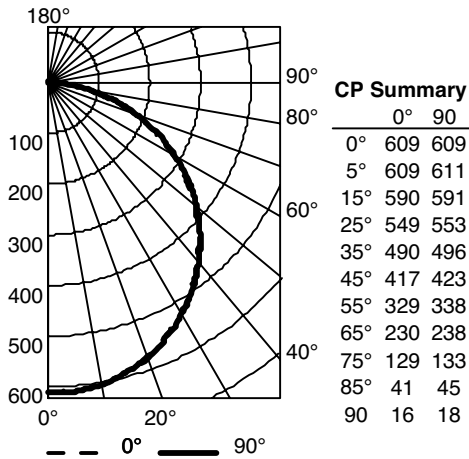

		Coefficients of Utilization									Zonal Lumen Summary			
pc	pw	80%			70%			50%			Zone	Lumens	% Lamp	% Fixture
		70%	50%	30%	50%	30%	10%	50%	30%	10%				
0	119	119	119	119	116	116	116	111	111	111	0° - 30°	480	25.8	25.8
1	108	103	98	98	101	96	93	96	93	90	0° - 40°	789	42.5	42.5
2	98	89	82	82	87	81	75	84	78	73	0° - 60°	1414	76.0	76.0
3	89	78	70	70	76	69	62	73	67	61	0° - 90°	1840	99.0	99.0
4	81	69	60	60	68	59	53	65	58	52	90° - 120°	15	0.8	0.8
5	75	62	52	52	60	52	45	58	51	45	90° - 130°	15	0.8	0.8
6	69	55	46	46	54	46	39	52	45	39	90° - 150°	17	0.9	0.9
7	64	50	41	41	49	41	35	48	40	34	90° - 180°	19	1.0	1.0
8	59	46	37	37	45	37	31	44	36	31	0° - 180°	1859	100.0	100.0
9	55	42	34	34	41	33	28	40	33	28				
10	52	39	31	31	38	30	25	37	30	25				